



Max. working pressure/ Presiune max. de lucru 10 bar
 Max. working temperature/ Temperatură max. de lucru 90 °C
 Mounting kit included/ Kit montaj inclus: KIT
 Factory pressure test/ Presiune de probă: 13 bar
 Elements & collectors/ Elementi și colectori: Ø22+35 mm





Premier XL Space

NEW!

Premier XL Space is a functional and stylish solution designed to add warmth and practicality in any bathroom. The durable stainless-steel construction and clean aesthetic make it an attractive option, being able to generate good output, complementing any range of interior design styles.

Premier XL Space este o soluție practică și elegantă, concepută pentru a adăuga căldură și utilitate în orice baie. Construcția durabilă din oțel inoxidabil și estetica simplă, îl fac o opțiune atractivă, cu un randament termic bun, completând orice gamă de stiluri de design interior.

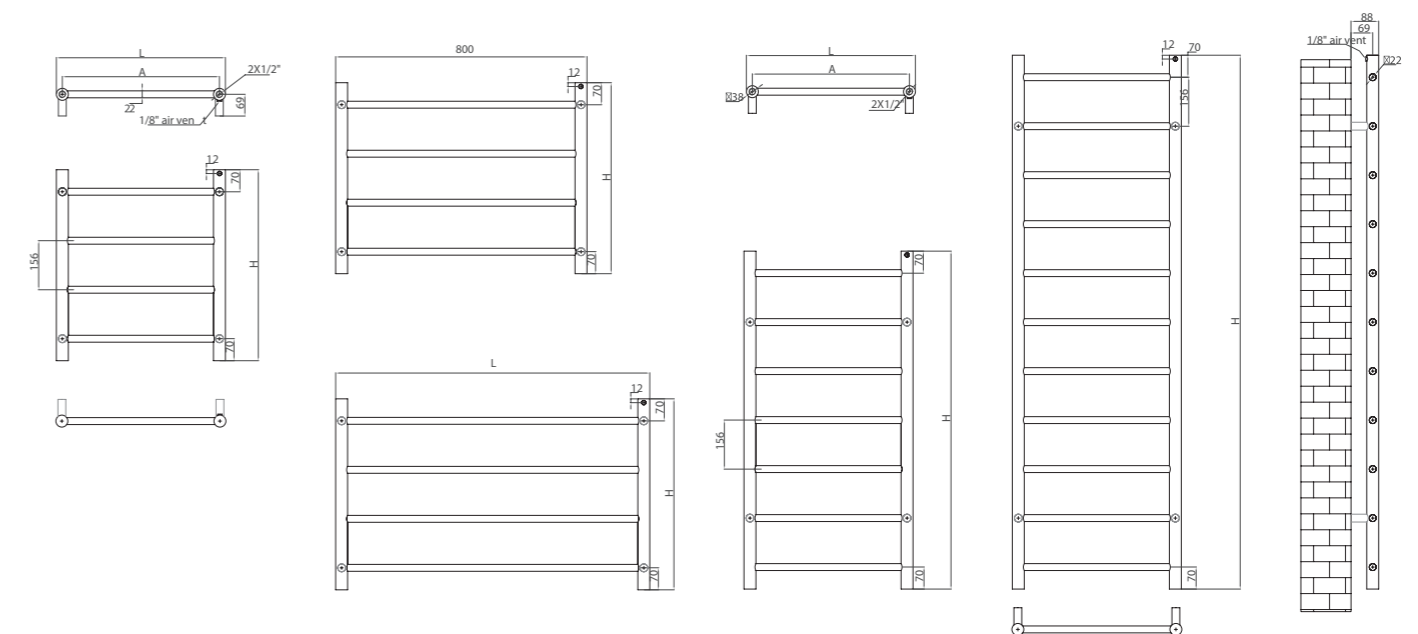

Hydraulic connections/Conexiuni hidraulice

Code Cod	Finish Finisaj	Height Înălțime (H)	Length Lățime (L)	Centres Interax (A)	No. el Nr. elemente	Weight Greutate	Volume Volum	Output / Putere termică (watt)			
								Δt=30°C	Δt=50°C	Δt=60°C	electric
		mm	mm	mm	pcs	kg	l	W	W	W	W
PREMBS054/060.8X	inox/stainless steel	608	538	500	4	3,158	1,61	55	105	131	300
PREMBS080/060.8X		608	800	762	4	3,952	1,99	69	132	165	300
PREMBS100/060.8X		608	1000	962	4	4,56	2,24	79	152	190	300
PREMBS054/107.6X		1076	538	500	7	5,56	2,83	96	185	231	500
PREMBS054/170X		1700	538	500	11	8,76	4,46	151	291	364	500