

RADOX



R
A
D
I
A
T
O
R
S

Împreună, pentru o viață cu stil

O parte importantă a succesului companiei RADOX pe piața mondială revine angajamentului nostru privind nivelul ridicat de calitate al radiatoarelor și designului lor unic. Noi credem că toți clienții noștri merită un produs de calitate și pentru acest lucru noi nu facem compromisuri în procesul de fabricație. Prin angajarea designerilor și inginerilor de top, prin folosirea celor mai bune și performante materiale, RADOX oferă produse de lux la prețuri accesibile.

Concurenții în această industrie abundă, dar nici unul nu se poate compara cu calitatea sau valoarea totală a produsului și serviciului RADOX. Departe de a fi doar corpuri de încălzit, radiatoarele RADOX adaugă stil și eleganță oricărei camere.

Bine ați venit în lumea radiatoarelor RADOX !

We believe in stylish living for everyone

Our prominence on the world market can be directly attributed to our meticulous commitment to optimum quality and unique design. We believe our customers deserve a durable product so we take no short-cuts in the manufacturing process. By employing top designers and engineers, utilizing the best materials, incorporating high-end features and ensuring tight production tolerances at our factories, RADOX delivers luxury products at affordable prices.

Competitors in the industry abound, but none can match the quality, support or overall value of RADOX. Not only do our products provide warmth during the long, frigid days of winter, but they enhance any room with style regardless of the design scheme.

Welcome to the world of RADOX RADIATORS!

Index

About Us pag. 6


Why choose a
RADOX RADIATOR pag. 7

Designer Radiators




Allure	pag. 9
Broc	pag. 11
Circle	pag. 13
Combi	pag. 15
Combi Glass	pag. 17
Fan	pag. 19
Idea	pag. 21
Invisible 50	pag. 23
Invisible 40	pag. 25
Maze	pag. 27
Mega	pag. 29
Mega Burlani	pag. 31
Multicolona	pag. 33
Multicolona Square	pag. 35
Nova	pag. 37
Nova Flat	pag. 39
Nova Glass	pag. 41
Piglet	pag. 43
Slim	pag. 45
Vertica D	pag. 47
Vertica D Bi	pag. 49
Vertica D Mirror	pag. 51
Vesta	pag. 53
Vesta Uno	pag. 55
Wave	pag. 57

Designer towel radiators

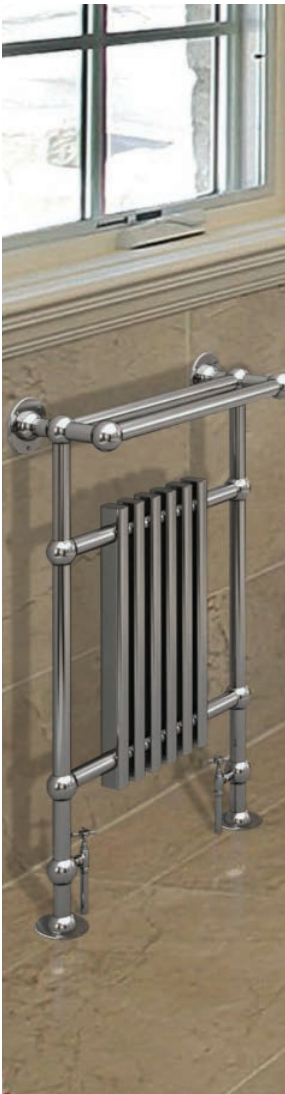

Apollo	pag. 59
Aramis	pag. 61
Aztec	pag. 63
Cora	pag. 65
Dora 70	pag. 67
Ellie	pag. 69
Ellie 3	pag. 71
Empire	pag. 73
Empire Inspire	pag. 75
Empire Multi	pag. 77
Esse	pag. 79
Filon	pag. 81
Fingers	pag. 83
Kazar	pag. 85
Quebis	pag. 87
Quebis Round	pag. 89
Sera	pag. 91
Serene	pag. 93
Serpentine	pag. 95
Smart U	pag. 97
Upper	pag. 99
Upper Quadro	pag.101
Vulcan NV	pag.103

Convectors

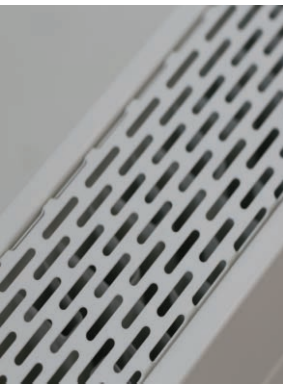

RC convectors	pag. 125
Wall Convector RCP	pag. 127
King	pag. 129
King vent convector	pag. 131
UNDERFloor	
Convector	pag. 133
Curved UNDERFloor	
Convector	pag. 137

Technical Information

Electrical RADIATOR	pag. 140
Mixed working RADIATOR	pag. 141
Accessories:	
> Chrome cover for radiator pipes	pag. 142
> Mounting kit	pag. 143
> Valves	pag. 145
Pressure test	pag. 146
Colour RAL chart	pag. 147

Conditions & terms

pag. 148

Standard towel radiators



Break Q	pag.105
Premier XL	pag.107
Premier XL Round	pag.109
River	pag.111
Scala	pag.113
Scala Round	pag.115
Space	pag.117
Space Round	pag.119
Sunny	pag.121
Sunny Round	pag.123





Despre noi

Compania RADOX cu sediul în București, România, domină piața produselor de încălzire și climatizare de peste douăzeci de ani. Este unul dintre cei mai mari producători și distribuitori din Europa de produse de încălzire, climatizare și ventilație. Cu peste 300 de angajați și două fabrici, RADOX oferă o gamă largă de produse HVAC: panouri solare, pompe de căldură, cazane și centrale termice, injectoare, schimbătoare de căldură, generatoare de aer cald, tavane radiante, pompe, stații de dedurizare a apei, aparate de aer condiționat, ventiloconvectoare, sisteme de încălzire/răcire prin pardoseală ș.a.

În 2005, RADOX a inaugurat în cadrul fabricii din București cea mai performantă instalație de cromare decorativă din Europa Centrală și de Est, complet automată și ecologică, ceea ce a accelerat procesul produc-tiv, reducând semnificativ costurile, precum și impactul asupra mediului.

RADOX distribuie produsele sale în Europa, Asia, Africa, Australia și în prezent este în curs de dezvoltare piața Americii de Nord.

Succesul nostru derivă din respectul cu care ne tratăm clienții. Liniile noastre telefonice sunt directe, deschise mereu. Noi nu oferim scuze, oferim soluții și livrăm cu promptitudine clienților noștri produse de calitate care să le depășească așteptările. Clienții noștri merită ce este mai bun, așa că le oferim cele mai bune produse.

www.radox.ro

About Us

RADOX company, based in Bucharest, Romania, has been in business for over twenty years. It is one of the largest manufacturers of high-end heating and cooling products in Europe. With over 300 employees and several large factories, RADOX offers a wide range of products including: solar panels, heat pumps, boilers, injectors, heat exchangers, hot air generators, radiating ceilings, pumps, water softening stations, air conditioners, fan convectors, and floor heating/cooling systems.

In 2005, RADOX unveiled one of the most advanced chrome plating units in Europe at its Bucharest plant affording it the benefit of expediting production, trimming costs significantly, and reducing its carbon footprint even further.

RADOX distributes its products to the European and Asian, African and Australian markets and presently is in the process of making the transition to North America.

We credit our success to direct engagement with our clients. Our phone lines are direct; there are no extensions. We never offer excuses, we offer solutions and we always promptly deliver to our clients a quality final product which exceeds their expectations. Our customers deserve the best, so we give them the best.

www.radoxradiators.ro

De ce alegeți Radox?

- Noi NU am folosit și NU VOM folosi niciodată cuprul în procesul de cromare. Tehnologia de cromare prin cuprare (utilizată în principal de către producătorii de calitate foarte scăzută) produce derivați nocivi, cum ar fi cianură de cupru, care are un impact devastator asupra mediului.
- Noi oferim o garanție de 10 ani pentru radiatoarele noastre. Radiatoarele sunt sudate TIG pentru îmbinări puternice, racorduri drepte și eliminarea porilor. Instalația noastră automată de cromare previne pătrunderea acidului care cauzează rugină la interiorul radiatorului. Radiatoarele vopsite sunt sablate și fosfatate înainte de vopsire pentru o mai bună aderență a vopselei. Noi folosim oțel inoxidabil lustruit de înaltă calitate AISI 304 pentru radiatoarele noastre.
- Radiatoarele noastre sunt oferite în variantă cromată, inox, vopsite alb standard, precum și în orice culoare dorește clientului (aleasă din paletarul RAL).

Why Choose Radox?

- We DO NOT and will NEVER use any copper plating in the production of our products. Copper plating technology (used primarily by low-cost manufacturers) produces harmful by-products like copper cyanide which has a devastating impact on the environment.
- We offer a 10 year guarantee on our radiators. The units are TIG welded for stronger joints, straight tappings and the elimination of pin-holes. Our automated chrome line prevents acid penetration which commonly causes internal rust. Painted rails are sandblasted prior to painting for better paint adhesion. We use highly polished 304 marine-grade stainless steel for our exquisite radiators.
- Our radiators are offered in chrome, classic white, stainless steel, and any color the client requests (chosen off the RAL chart).

Cum ne putem permite să garantăm 10 ani pentru produsele noastre, vopsite și cromate?

- SUDURILE sunt realizate în mediu de gaz protector (argon corgon) prin procedeele: TIG, WIG, MAG, MIG, sau lichid -flux pentru procedeul de sudare brazare, ceea ce creează suduri de înaltă calitate și foarte curate (fără pori sau zgură), o etanșare perfectă pentru prevenirea problemelor de scurgeri de apă.
- Spre deosebire de sudare în cuptor, procesul nostru de sudură permite o mai bună acoperire în zonele delicate între element și colector, și asigură o optimă durabilitate și rezistență la coroziune.
- Radiatoarele sunt curățate prin sablare automată înainte de vopsire pentru o mai bună aderență a vopselei.
- Folosim vopsea de calitate, de la Akzo Nobel care nu conține TGIC.
- Instalația noastră de cromare este complet automată făcând imposibilă pătrunderea acidului în interiorul radiatorului în timpul procesului de cromare, lucru care ar duce inevitabil la ruginire.
- În procesul de cromare folosim un strat dublu de nichel (35-40 microni).


How can we afford to guarantee our products, painted and chrome plated, for 10 years?

- We employ the usage of "TIG" welding of taps which is durable and results high quality joints by reducing the possibility of pores.
- As opposed to typical furnace welding, our brazing process allows for better coverage in the delicate areas between the element and the collector ensuring optimum corrosion resistance and durability.
- We sand our radiators before painting them for better paint adhesion.
- Our paints, provided by Akzo Nobel contain no TGIC.
- We utilize a fully automatic plating unit which forbids the penetration of acid during the chroming process which inevitably leads to rust.
- In the chrome process we use a double layer of nickel (35-40 microns).





Allure

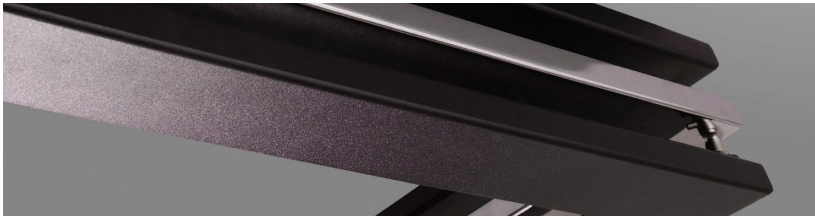


ALLURE răspunde cerințelor oricărui proiect de design interior. Este un radiator din 3 elemente niplabili, fiecare element poate avea o altă culoarea sau se pot face combinații de culori și crom. ALLURE este un radiator modern, un adevărat element estetic pentru orice cameră.

ALLURE meets the demands of each design. It is a modular radiator, so the three elements can have different colours or any combination of colours and sleek chrome. Suitable usually for stylish bathrooms, ALLURE is a modern radiator, a true aesthetic element to any room.



Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)							
					Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	kg	l	RAL	chrome	RAL	chrome	RAL	chrome	RAL	chrome
660	700	660	16.9	6.2	296	228	419	322	566	435	705	543

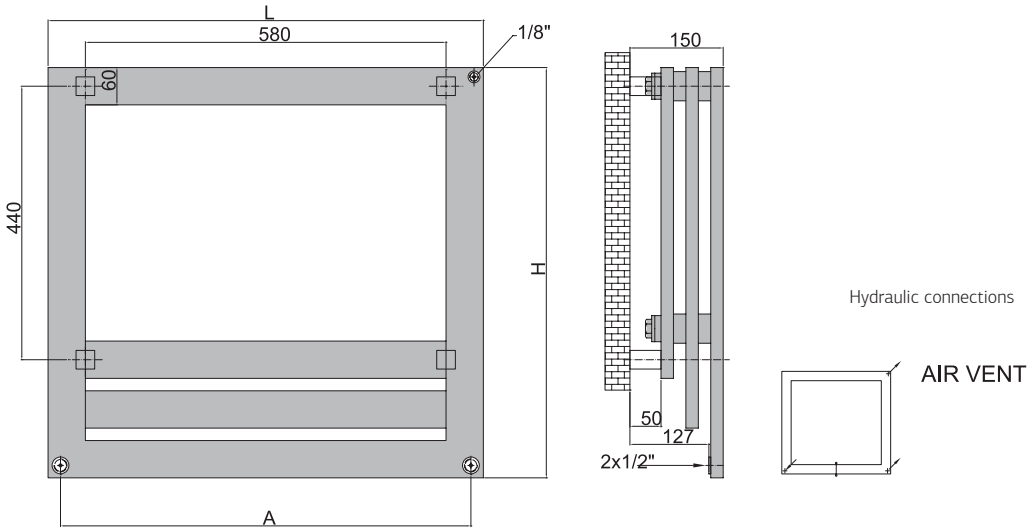



Broc




Un radiator atractiv și neconvențional, BROC este o îmbinare perfectă de inginerie și creativitate. Puternic atât în efectul vizual creat cât și în funcționalitate, BROC este disponibil în orice culoare RAL, cromat sau din inox.

An attractive radiator set apart from the heating tradition, BROC is a unique piece of craftsmanship. Outrageously powerful in both visual effect and functionality, BROC is available in all RAL colours, chrome plated or stainless steel.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A1)	Centres (A2)	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	mm	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	stainless steel
690	690	500	660	9.2	5	207	159	153	292	224	216	394	303	292	493	379	365	

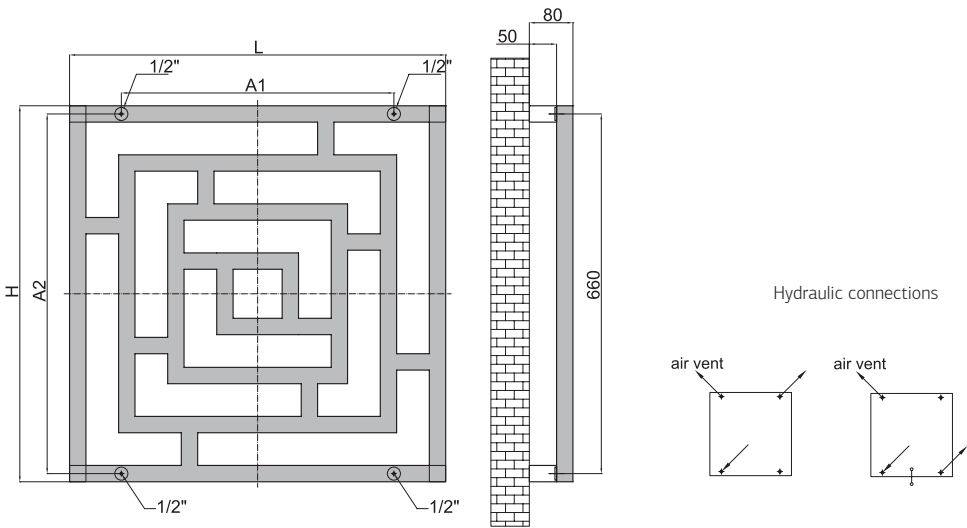



Circle





Acest superb radiator este mai mult decât un simplu element de încălzire. Designul ergonomic permite montarea în orice colț din bucătărie sau baie, atunci când nu există mult spațiu la dispoziție. CIRCLE este disponibil în orice culoare RAL, iar spațiul generos între inele permite depozitarea și încălzirea optimă a prosoapelor.

This stunning radiator is much more than just a heating element. With exceptional heat output CIRCLE boasts extensive functional utility. Our clever space-saving radiator can fit in any corner of a kitchen or bathroom. Its rings are spaced as such to allow towels to hang within the center of the radiator.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K03 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
800	250	50	14	6,3	3,3	224	316	427	534
1200	250	50	20	9	4,8	324	457	618	773
1800	250	50	30	13,5	7,2	485	685	926	1158

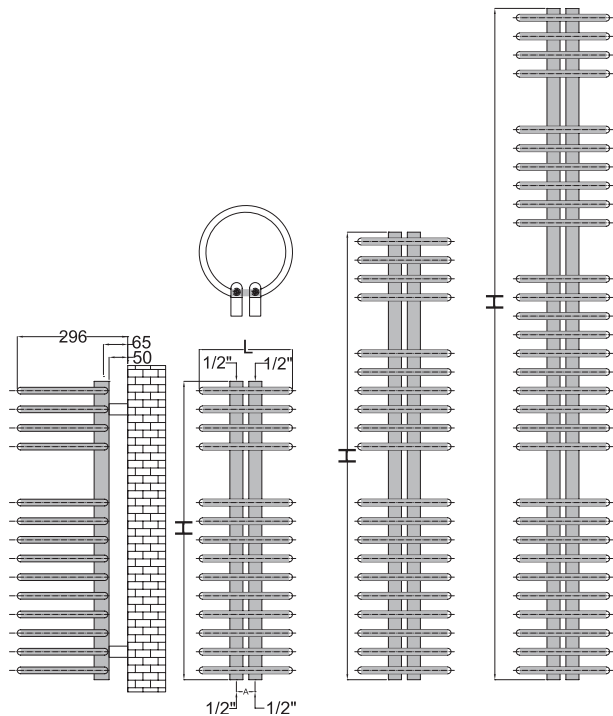



Combi




COMBI are un design practic și atractiv, disponibil în orice culoare RAL, cromat sau chiar in combinații de culori și crom datorită celor doi elemente niplabili. Foarte potrivit atât pentru bucătărie cât și pentru baie, acest model splendid se armonizează oricărui interior.

Finished in a sleek chrome or in any combination of colours and chrome, COMBI is both practical and lovingly designed. Very suitable for kitchens and bathrooms alike, this superb design suit every interior.




Max. working pressure 6 bar | Max. working temperature 120°C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
600	900	540	2	10.5	3.9	181	139	255	196	345	265	430	331

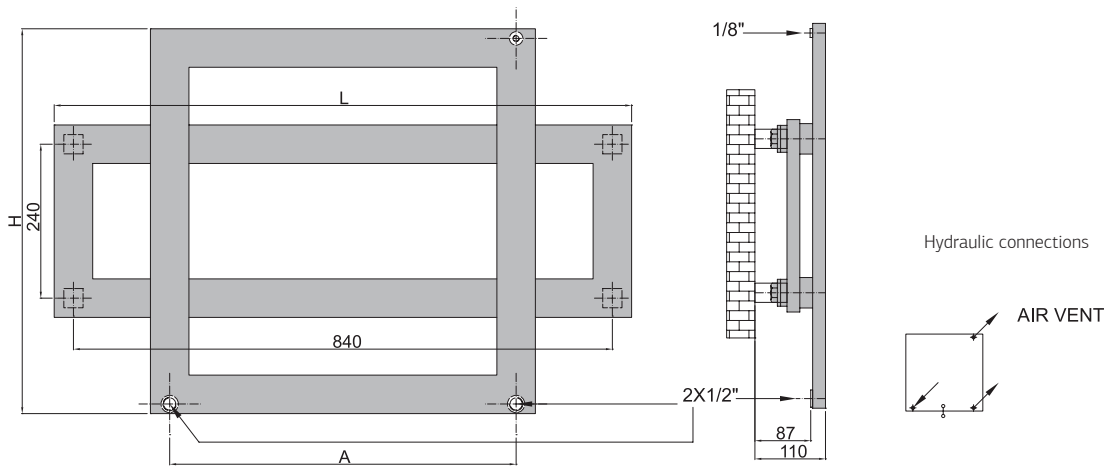



Combi Glass

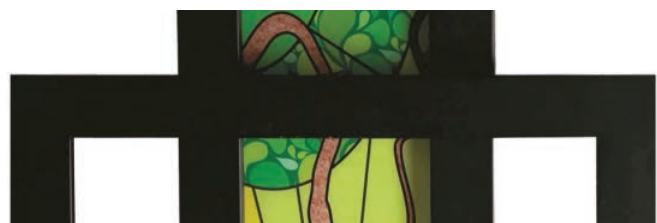



Cu un design remarcabil, COMBI GLASS este un tribut adus creativității moderne. Foarte practic și elegant prin designul ingenios al sticlei, COMBI GLASS aduce un plus de stil și rafinament în orice încăpere.

This fresh design is a tribute to modern creativity. The practical shape makes this radiator ideal for any room setting. With its glass design, COMBI GLASS adds elegance and sophistication to any living area.



Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)							
					Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
900	600	540	10.47	3.87	181	139	255	196	345	265	430	331

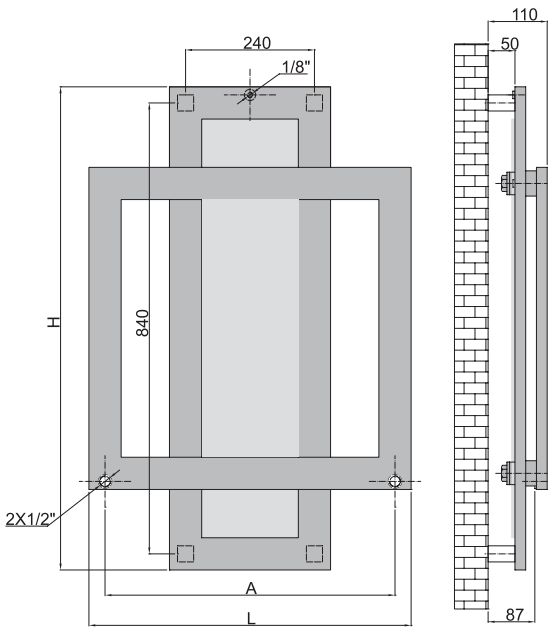



Fan




O prezență originală, radiatorul FAN este alegerea perfectă pentru un stil de viață modern. Paleta de culori RAL sau finisajul cromat vă permit amplasarea radiatorului FAN în orice stil arhitectural. De asemenea accesoriile RADOX (robehooks) vor da o notă de eleganță și utilitate sporită acestui modern radiator.

With an unique design, FAN is suitable for modern lifestyle applications and architectural spaces. Choose from our wide selection of RAL colours or a sleek chrome to match your theme and put the finishing touch to your stylish living. Also our special robehooks will make a practical and fashionable addition to this chic radiator.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K24 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
1800	285	50	4	13.4	9.8	305	235	431	331	582	448	728	560

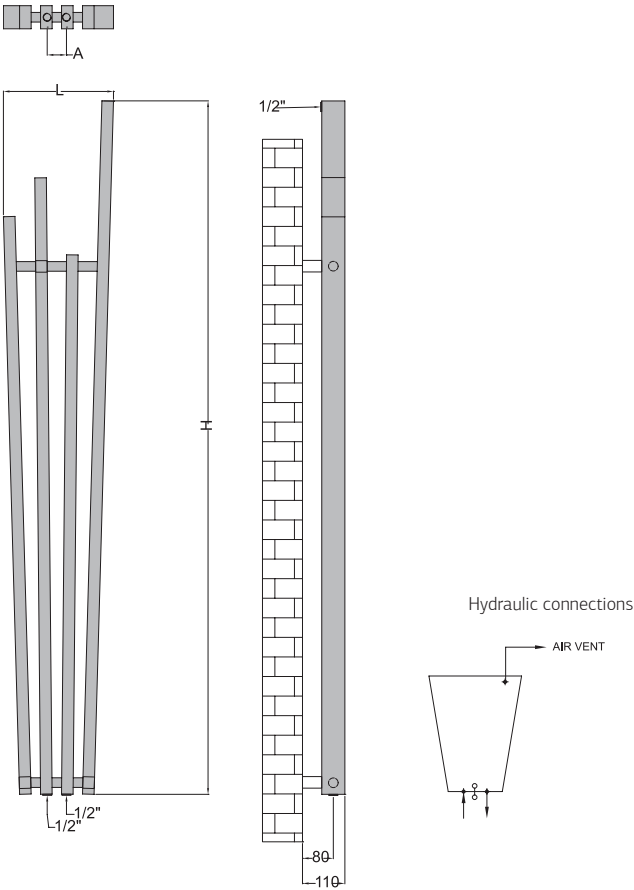



Idea



IDEA este mai mult decât un radiator, este o piesă de mobilier elegantă și multifuncțională. Este soluția ideală pentru o baie modernă și organizată, oferind în același timp confort termic și un generos spațiu de depozitare: două sertare și două polițe de sticlă. IDEA îmbină finisajul cromului lucios și dulapul din lemn într-un design atractiv și funcțional fiind disponibil și în variantă electrică (900 watt).


More than a radiator, IDEA is an elegant and multifunctional piece of furniture. It is the perfect solution for storing and heating an organized and modern bathroom. With a beautiful chrome finish and dark wood cabinet - two large drawers and two shelf glasses - IDEA is also available in an electric version (900watt).



Max. working pressure 7 bar | Max. working temperature 120 °C




Height (H)	Length (L)	Centres (A1)	Centres (A2)	Weight	Volume	OUTPUT (watt)				Electrical
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$	
mm	mm	mm	mm	kg	l	chrome	chrome	chrome	chrome	
1555	500	465	1325	22.1	11.8	401	566	765	956	900

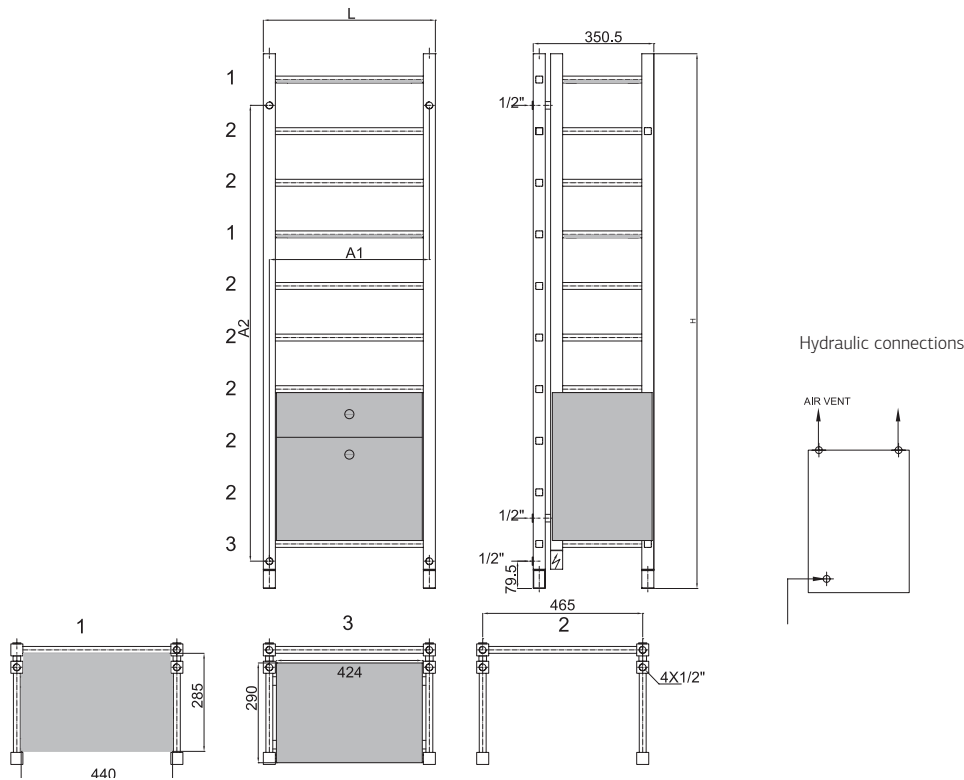



Invisible 50

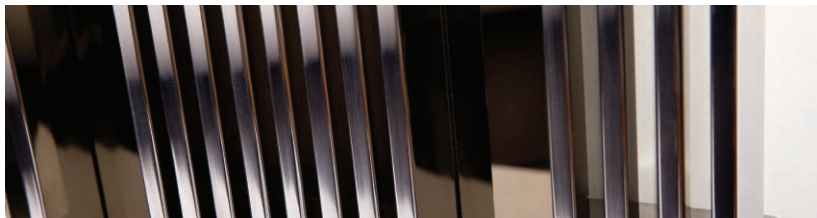



Un radiator impunător cu putere termică mare, INVISIBLE 50 se potrivește în orice spațiu. Oglinzile și elementii din oțel inoxidabil vor adăuga stil și luminozitate oricărei locuințe.

With its tall version and high outputs, INVISIBLE 50 can fit into any areas, highlighting unusable wall space with its mirrors and stainless steel elements. Very valuable, INVISIBLE 50 adds light and style in any home.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						Δt=30°C	Δt=40°C	Δt=50°C	Δt=60°C
mm	mm	mm	pcs	kg	l	stainless steel	stainless steel	stainless steel	stainless steel
1800	419	50	18	44.6	11.3	776	1096	1481	1852
1500	419	50	18	37.4	9.5	650	919	1241	1552



Hydraulic connections





Invisible 40




Detaliile contează! Oglinzile și elementii verticali vor crea un efect spectaculos oriunde va fi amplasat radiatorul INVISIBLE 40. Este un radiator de design accesibil și disponibil în orice culoare din gama RAL și inox.

All in the detail. The slim mirrors and attractive patterns make this radiator so pleasing to the eye. INVISIBLE 40 is an affordable designer elegance at your fingertips, available in a large range of RAL colours and stainless steel.



Max. working pressure 5/7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	pcs	kg	l	ral	stainless steel	ral	stainless steel	ral	stainless steel	ral	stainless steel
1800	419	50	18	37.0	9.0	877	650	1239	918	1674	1240	2009	1488
1500	419	50	18	31.0	7.6	736	545	1039	770	1404	1040	1685	1248

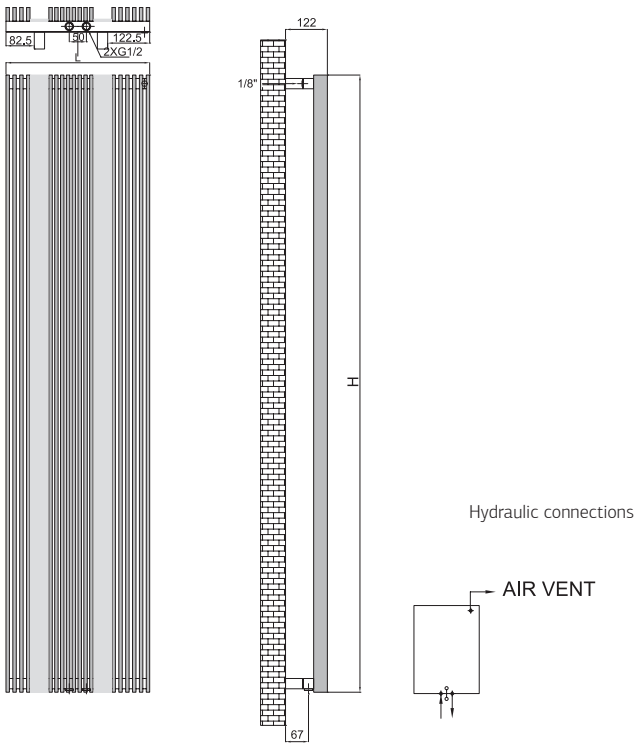



Maze




Un radiator cu un design contemporan ideal pentru orice casă. Cu un design rectangular, MAZE nu este nici pe departe un model banal.

A contemporary slender radiator which delivers elegance to any home. MAZE's distinctive labyrinth design adds flavor to a room while typical modern radiators essentially draw from it.




Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)											
					Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
1690	490	50	12.4	5.8	296	227	219	417	321	309	564	434	418	705	542	522

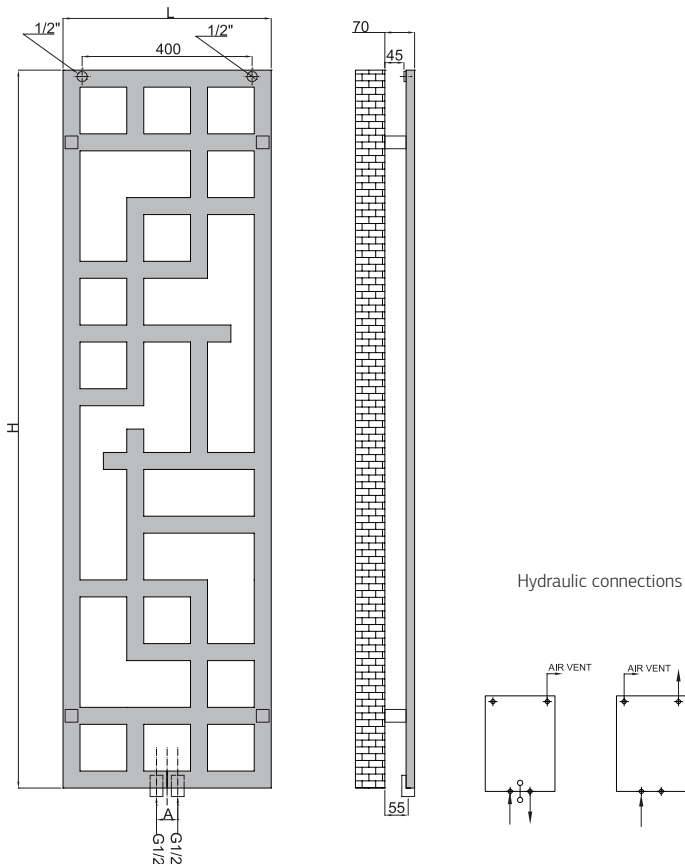



Mega

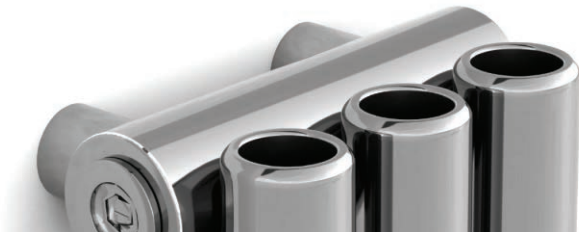




MEGA reprezintă o inovație a radiatorului vertical. Configurația elementilor tubulari simplă (mono) sau dublă (bi) crează un ritm dinamic care se armonizează perfect cu stilul de viață modern. MEGA este un radiator robust și elegant, incomparabil datorită tehnologie unice de sudare folosită în realizarea lui.

Utilizing unique welding technology, MEGA is a modern reinterpretation of a vertical radiator. Determinate and powerful, its single (mono) or double configurations (bi) of elements create a relentless pace accentuating the dynamic radiator, with its unique empty centered elements. As well as bringing that special touch to your space, MEGA has a high heat output with low water volume.



Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K15 see pag 143

	Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
							$\Delta t=30^{\circ}\text{C}$		$\Delta t=40^{\circ}\text{C}$		$\Delta t=50^{\circ}\text{C}$		$\Delta t=60^{\circ}\text{C}$	
							ral	stainless steel	ral	stainless steel	ral	stainless steel	ral	stainless steel
MEGA MONO	1500	363	1458	8	31.8	13.1	373	277	527	390	712	528	890	660
	1800	363	1758	8	37.7	15.5	442	328	625	463	844	625	1055	782
MEGA BI	1500	363	1458	16	61.8	25.1	721	-	1019	-	1377	-	1721	-
	1800	363	1758	16	73.6	30.0	860	-	1214	-	1641	-	2051	-

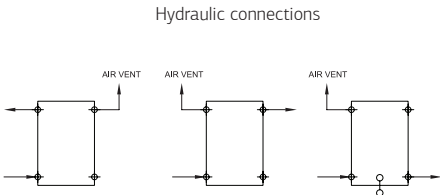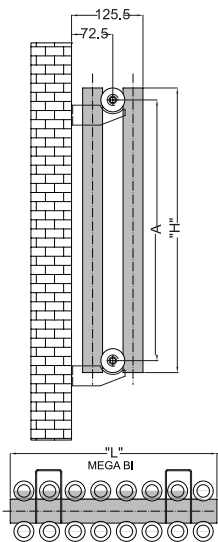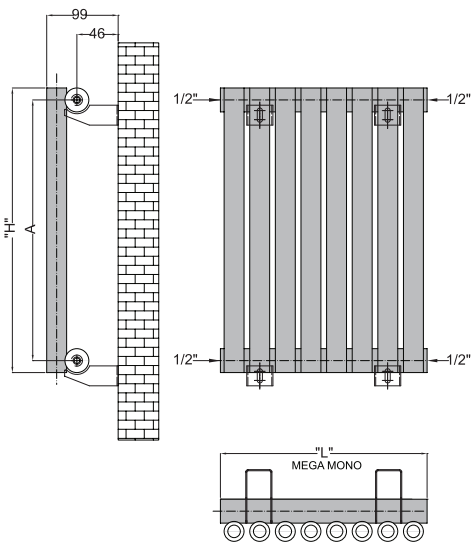



Mega Burlani




MEGA BURLANI are un design unic, sistem „țeava în țeava” oferind confort termic dar în același timp fiind ușor de amplasat în orice încăpere. Design elegant și tehnologie inteligentă, MEGA BURLANI este disponibil într-o varietate de culori, versiunea verticală și orizontală.

Tube within tube design, MEGA BURLANI offers superb heat delivery, easy to fit in any modern room. Stylish design with energy efficient technology, MEGA BURLANI is available in a variety of colours, both horizontal and vertical versions.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	pcs	kg	l	ral	stainless steel	ral	stainless steel	ral	stainless steel	ral	stainless steel
800	287	695	3	19.4	4.3	340	252	480	356	649	481	812	601
800	386	695	4	25.9	5.8	454	337	642	475	867	642	1084	803
800	485	695	5	32.4	7.2	568	421	803	595	1085	804	1356	1004
1800	287	1695	3	42.6	9.1	738	546	1042	772	1408	1043	1760	1304
1800	386	1695	4	56.9	12.1	984	729	1390	1030	1879	1392	2348	1739
1800	485	1695	5	71.1	15.1	1231	912	1738	1288	2349	1740	2937	2175

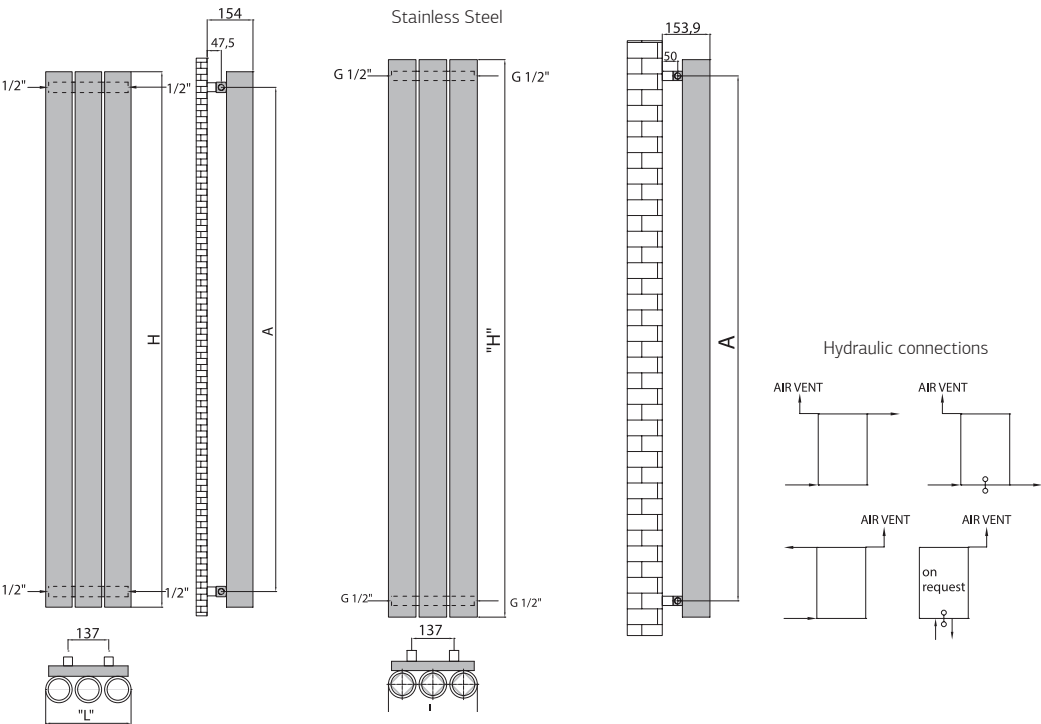



Multicolona




Gama MULTICOLONA este disponibilă într-o varietate de lungimi, înălțimi și trei adâncimi, pentru un confort termic optim necesar oricărei încăperi. Un model atractiv, disponibil în diferite culori, inox sau cromat, MULTICOLONA este potrivit pentru proiecte comerciale, sectorul public și proiecte rezidențiale.

MULTICOLONA range is available in a variety of lengths and heights and in three depths to give the optimum output for any location. Exceptionally attractive, with the possibility of making a radiator in different colours, stainless steel and chrome finish, depending on its destination and final setting, MULTICOLONA is suitable for any commercial, retail, public sector and residential projects.




Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K15 see pag 143

	Height (H)	Length (L)	Centres (A)	No el	Surface	Weight	Volume	OUTPUT (watt)											
								$\Delta t=30^{\circ}\text{C}$			$\Delta t=40^{\circ}\text{C}$			$\Delta t=50^{\circ}\text{C}$			$\Delta t=60^{\circ}\text{C}$		
								ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
	mm	mm	mm	pcs	m ²	kg	l												
MULTICOLONA 2	667	229	600	5	0.595	6.13	4.51	-	-	116	-	-	163	-	-	220	-	-	276
	1867	229	1800	5	1.538	14.58	11.73	-	-	298	-	-	421	-	-	570	-	-	712
	2067	229	2000	5	1.695	15.99	12.94	-	-	329	-	-	464	-	-	628	-	-	785
	667	459	600	10	1.191	12.27	9.02	-	-	231	-	-	326	-	-	441	-	-	551
	1867	459	1800	10	3.075	29.17	23.47	-	-	597	-	-	843	-	-	1139	-	-	1424
MULTICOLONA 3	2067	459	2000	10	3.389	31.98	25.87	-	-	658	-	-	929	-	-	1255	-	-	1569
	667	229	600	5	-	9.80	5.38	226	174	-	319	245	-	431	332	-	539	414	-
	1867	229	1800	5	-	21.27	12.60	656	504	-	926	712	-	1252	963	-	1564	1203	-
	2067	229	2000	5	-	23.39	13.81	658	506	-	929	715	-	1256	966	-	1569	1207	-
	667	459	600	10	-	17.20	10.76	452	347	-	638	491	-	862	663	-	1077	829	-
MULTICOLONA 4	1867	459	1800	10	-	42.55	25.21	1192	917	-	1684	1295	-	2275	1750	-	2844	2188	-
	2067	459	2000	10	-	46.77	27.61	1316	1012	-	1858	1429	-	2511	1932	-	3139	2414	-
	667	229	600	5	1.134	13.07	6.83	-	-	220	-	-	311	-	-	420	-	-	525
	1867	229	1800	5	3.019	29.97	16.46	-	-	586	-	-	827	-	-	1118	-	-	1398
	2067	229	2000	5	3.333	32.78	18.06	-	-	647	-	-	914	-	-	1234	-	-	1543
MULTICOLONA 5	667	459	600	10	2.268	26.13	13.66	-	-	440	-	-	622	-	-	840	-	-	1050
	1867	459	1800	10	6.038	59.93	32.91	-	-	1172	-	-	1655	-	-	2236	-	-	2795
	2067	459	2000	10	6.666	65.57	36.12	-	-	1294	-	-	1827	-	-	2469	-	-	3086

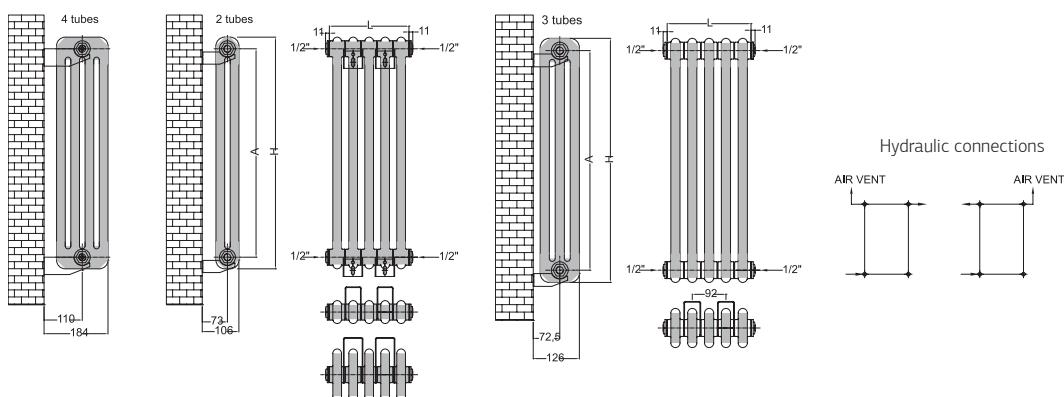



Multicolona Square

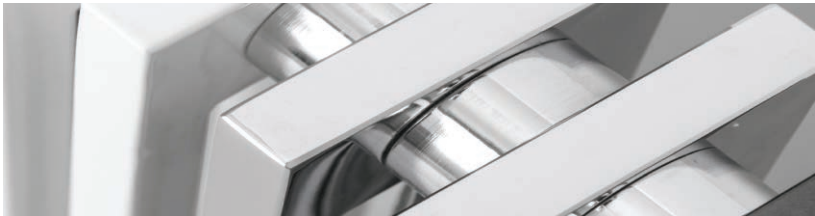




MULTICOLONA SQUARE este un radiator ideal pentru orice încăpere. Designul modular permite personalizarea, având la dispoziție o gamă largă de dimensiuni și finisaje. Este un model versatil care va completa cu succes un stil arhitectural modern, minimalist dar și un ambient rafinat și pretențios. Atunci când aveți nevoie de un radiator cu un design simplu dar atractiv și cu putere termică mare, MULTICOLONA SQUARE este răspunsul!

MULTICOLONA SQUARE is a classic steel column radiator, ideal for most applications. Its modular design allows it to be easily personalized in a wide range of sizes and finishes, very versatile in both modern and period settings. When sometimes all you need is a radiator with a simple look and great heat outputs, MULTICOLONNA SQUARE is just what you are looking for.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K15 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)											
						$\Delta t=30^{\circ}\text{C}$			$\Delta t=40^{\circ}\text{C}$			$\Delta t=50^{\circ}\text{C}$			$\Delta t=60^{\circ}\text{C}$		
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
660	400	600	10	20.8	7.0	472	363	350	667	513	494	901	693	667	1126	866	834
660	600	600	15	31.1	10.5	708	545	524	1000	769	741	1351	1039	1001	1689	1299	1251
660	800	600	20	41.5	14.0	944	726	699	1333	1026	988	1802	1386	1335	2252	1732	1668

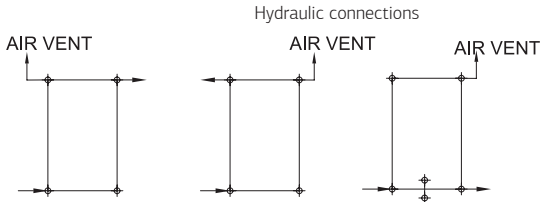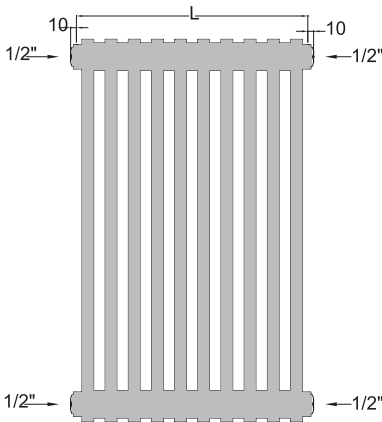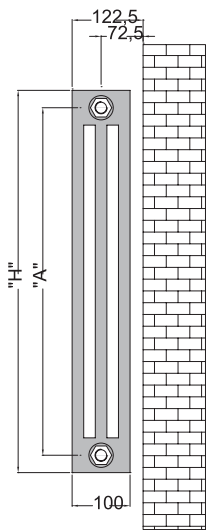



Nova




Acest radiator înalt, stil panou, cu putere termică ridicată, este visul oricărui designer de interior. NOVA este foarte ușor de instalat, disponibil în variantă verticală și orizontală. De asemenea, poate fi accessorizat cu unul sau mai multe suporturi pentru prosoape.

This tall, versatile radiator, with its slim panels, however big outputs, is an interior designers dream. Very easy to install, NOVA is a vertical radiator but also available as an horizontal radiator. Also it can be accessorized with one or more towel bars, placed where the client wishes.



Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
1200	280	1170	4	9.5	2.9	185	261	353	423
1200	420	1170	6	14.2	4.3	274	387	522	627
1200	630	1170	9	21.3	6.4	407	575	777	932
1500	280	1470	4	11.7	3.5	231	326	440	528
1500	420	1470	6	17.6	5.2	341	482	652	782
1500	630	1470	9	26.3	7.9	508	717	969	1163
1800	280	1770	4	14.0	4.1	276	390	527	633
1800	420	1770	6	20.9	6.2	409	578	781	937
1800	630	1770	9	31.3	9.3	608	859	1161	1394

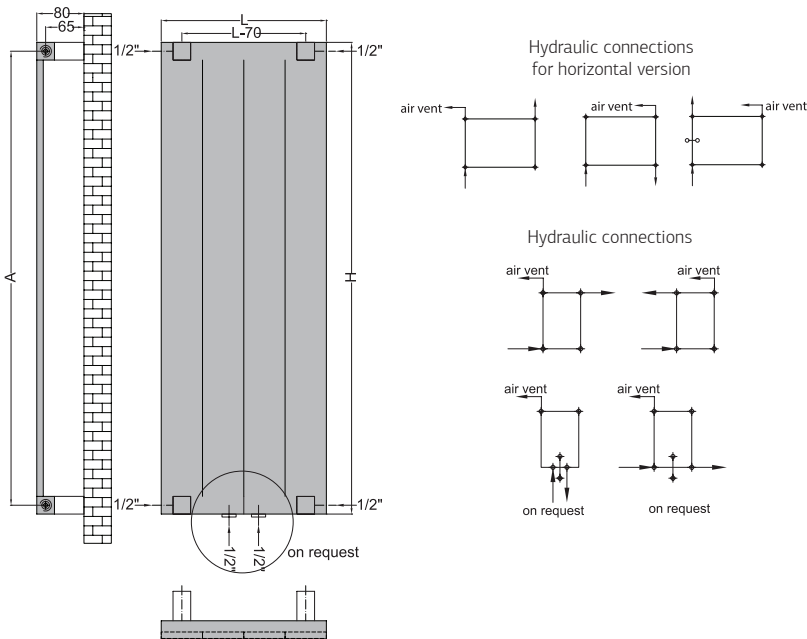



Nova Flat





NOVA FLAT este un model cu un farmec aparte, designul unic, cu panourile de oțel netede este în ton cu stilul de viață modern. Panourile generoase oferă confort termic excelent, fiind o piesă de design ideală pentru birou sau un living modern. Este disponibil în orice culoare RAL, variantă verticală sau orizontală.

With a unique, individual appeal, very smooth due to the steel panel, NOVA FLAT is suitable for modern lifestyle applications and architectural spaces. Its large panel area provides excellent heat outputs, ideal for modern living rooms or offices. Finish your home with a true original NOVA FLAT finished in any RAL colours and available as either a horizontal or vertical radiator.




Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
1200	280	1170	4	9.5	2.9	185	261	353	423
1200	420	1170	6	14.2	4.3	274	387	522	627
1200	630	1170	9	21.3	6.4	407	575	777	932
1500	280	1470	4	11.7	3.5	231	326	440	528
1500	420	1470	6	17.6	5.2	341	482	652	782
1500	630	1470	9	26.3	7.9	508	717	969	1163
1800	280	1770	4	14.0	4.1	276	390	527	633
1800	420	1770	6	20.9	6.2	409	578	781	937
1800	630	1770	9	31.3	9.3	608	859	1161	1394

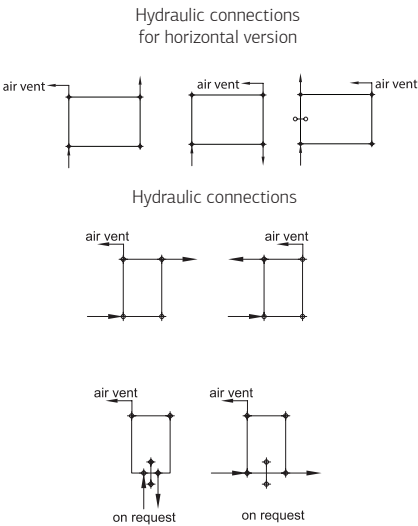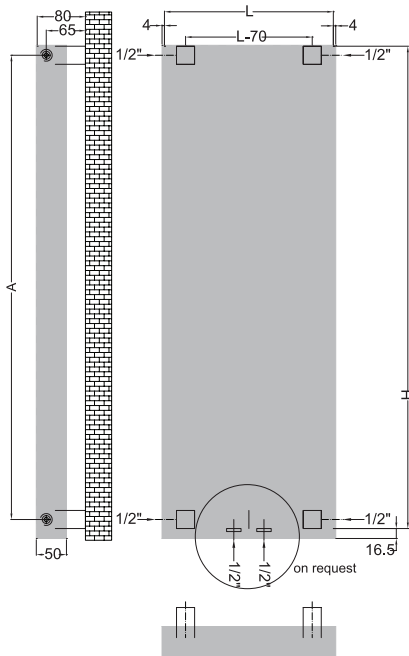



Nova Glass

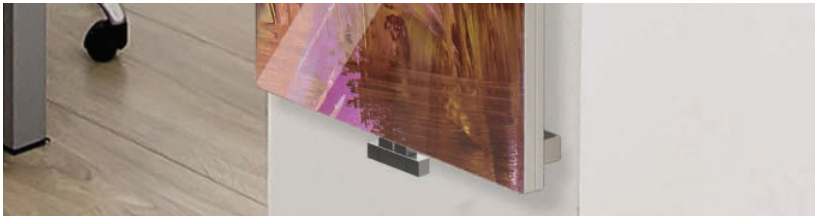

NOVA GLASS este un radiator splendid, elementii sunt inteligent ascunși în spatele unui panou personalizat cu o imagine spectaculoasă sau o oglindă. Orice interior poate fi completat cu un radiator original NOVA GLASS, eficient și puternic, disponibil în variantă orizontală sau verticală și chiar electric. Toate radiatoarele au sticlă securizată de 6 mm și sunt ideale pentru orice cameră.



An exquisite radiant design, NOVA GLASS's tubes are concealed behind a work of art (of your choosing) painted on a panel of glass. A mirror can be affixed in lieu of artwork. It is available horizontally or vertically, in any colour with two mirrored finishes (clear and bronze) and is fitted with a 6mm safety glass backing.



Max. working pressure 6 bar | Max. working temperature 120°C
Mounting kit included: K06 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
1200	420	1170	6	9.9	3.0	287	406	548	658
1500	420	1470	6	14.9	4.5	355	501	678	813
1800	420	1770	6	22.3	6.7	423	597	807	968

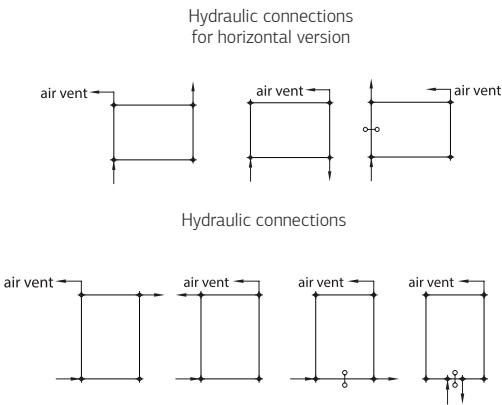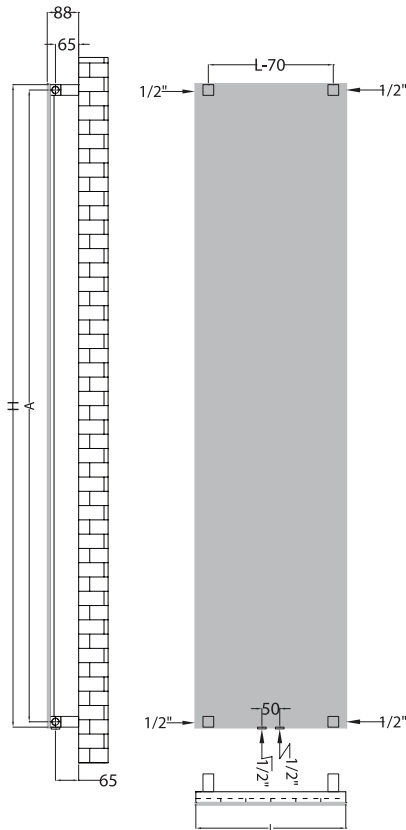



Piglet



PIGLET este ideal pentru camere cu ferestre mari, însă poate fi amplasat aproape oriunde. Are putere termică mare și este disponibil într-o mare gamă de finisaje: combinații de culori, crom sau oțel inoxidabil. Fiind montat pe podea, PIGLET este robust și practic, o adevărată piesă de artă decorativă.


PIGLET is a perfect heat source for low window sills and glass environments, but it can be placed almost anywhere. Very robust and practical, PIGGY is floor mounted, available in a wide range of finishes including combinations of colours and chrome. Low and sleek, and an altogether outstanding designer radiator, PIGLET, with efficient and superb heat output, is also available in stainless steel.



Max. working pressure 7 bar | Max. working temperature 120 °C



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	electrical
400	580	240	12	23.9	16.9	627	483	465	893	687	661	1206	928	894	1508	1160	1117	1000
400	680	240	14	27.8	19.6	770	593	571	1096	843	812	1481	1140	1097	1852	1425	1372	1000
400	780	240	16	31.6	22.3	926	712	686	1318	1014	976	1781	1370	1319	2226	1712	1649	1500
400	880	240	18	35.4	25.0	1094	842	810	1557	1198	1153	2104	1618	1559	2630	2023	1948	1500

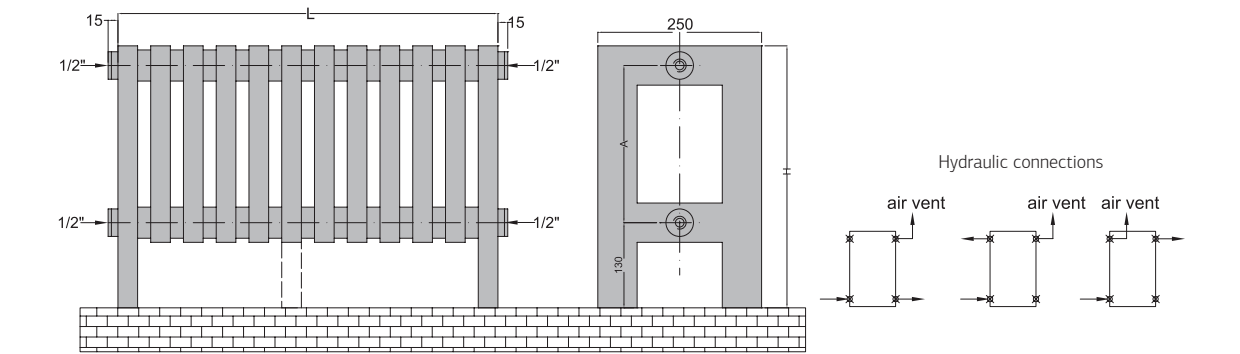



Slim




SLIM este prin definiție un radiator elegant care se îmbină perfect într-un design contemporan. Este disponibil în varianta mono sau dublă – radiatorul având încă un set de elementți pe spatele colectorului pentru o putere mai mare. SLIM este realizat folosind o tehnologie unică de sudare și poate fi comandat în finisaj cromat sau în orice culoare RAL.

With its elegant vertical steel tubes, SLIM is a minimalist yet striking contemporary radiator that quickly catches the eye with its stylish looks. SLIM is available in single (mono) or double configuration (bi) - where the radiator is built with a second set of piping at the rear for much greater outputs. Crafted utilizing unique welding technology, SLIM has white or other RAL colour finish, and also can be ordered in sleek chrome finish.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K22 see pag 143

	Height (H)	Length (L)	No. el	Centres (A)	Weight	Volume	OUTPUT (watt)							
							$\Delta t=30^{\circ}\text{C}$		$\Delta t=40^{\circ}\text{C}$		$\Delta t=50^{\circ}\text{C}$		$\Delta t=60^{\circ}\text{C}$	
							ral	chrome	ral	chrome	ral	chrome	ral	chrome
SLIM MONO	mm	mm	pcs	mm	kg	l								
	1000	450	10	958	9.3	5.0	249	192	352	271	475	366	570	439
	1000	900	20	958	18.6	10.1	498	383	704	541	1116	858	1339	1030
	1500	450	10	1458	12.9	7.0	357	275	504	388	681	524	818	629
	1500	900	20	1458	25.9	14.1	714	549	1009	776	1363	1048	1635	1258
	1800	450	10	1758	15.1	8.2	422	325	596	458	805	619	966	743
SLIM BI	1800	900	20	1758	30.3	16.5	844	649	1192	917	1610	1239	1932	1486
	1000	450	20	958	16.8	9.0	445	-	628	-	849	-	1019	-
	1000	900	40	958	33.6	18.1	890	-	1256	-	1698	-	2037	-
	1500	450	20	1458	24.1	13.1	661	-	933	-	1261	-	1513	-
	1500	900	40	1458	48.2	26.1	1321	-	1866	-	2522	-	3026	-
	1800	450	20	1758	28.5	15.5	790	-	1116	-	1508	-	1810	-
	1800	900	40	1758	57.0	30.9	1581	-	2232	-	3016	-	3620	-

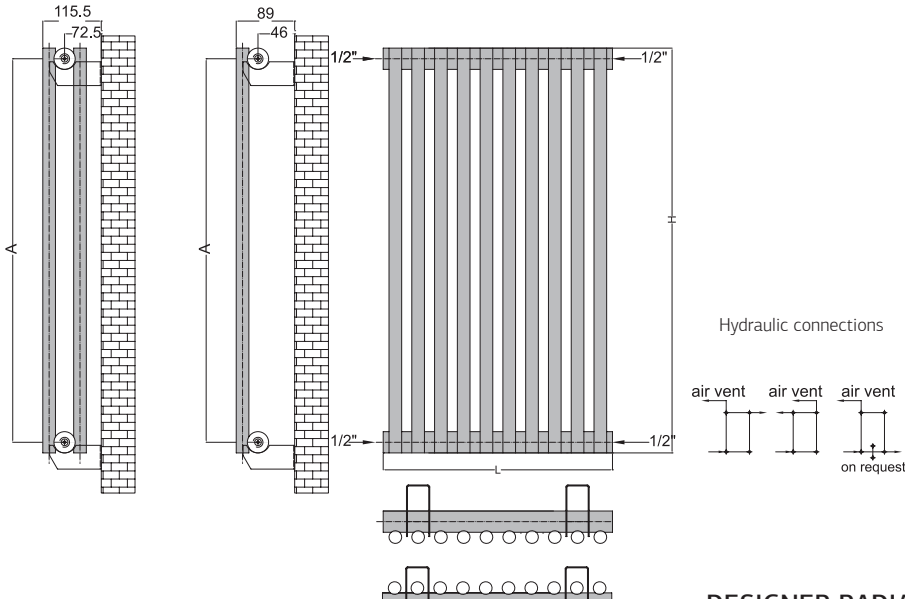



Vertica D

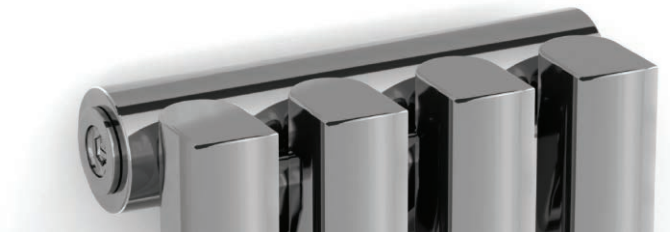


VERTICA D înseamnă linii precise, inginerie excepțională și utilitate. Este un model ideal pentru holuri spațioase, saloane sau oricare altă cameră de locuit. Disponibil în orice culoare RAL sau inox, VERTICA D poate fi accesoriizat cu diferite agățătoare (robe hook) proiectate special pentru acest model.

VERTICA D is all about clean lines, precise engineering and complete practicality. It looks fantastic in lounges, hallways or any other room. With towel hooks specifically designed for it, VERTICA D is the perfect complement to contemporary interiors with its minimal great aesthetic. Available in all RAL colour range and also in stainless steel.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K15 & K12 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Vol- ume	OUTPUT (watt)				Height (H)	Length (L)	Centres (A)	No el	Weight	Vol- ume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$							$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral	mm	mm	mm	pcs	kg	l	stainless steel	stainless steel	stainless steel	stainless steel
1500	450	1458	10	22.9	14.9	520	734	992	1240	1200	220	1158	4	7.6	4.9	126	179	241	302
1500	540	1458	12	27.5	17.8	623	880	1190	1487	1200	310	1158	6	11.3	7.3	189	267	360	450
1500	630	1458	14	32.1	20.8	727	1026	1387	1734	1200	490	1158	10	18.7	12.1	313	442	598	747
1500	720	1458	16	36.6	23.8	830	1173	1585	1981	1500	220	1458	4	9.3	6.0	155	219	296	370
1800	450	1758	10	27.1	17.6	617	872	1178	1472	1500	310	1458	6	13.8	9.0	232	328	443	553
1800	540	1758	12	32.5	21.1	740	1045	1412	1765	1500	490	1458	10	22.9	14.9	385	544	735	919
1800	630	1758	14	37.9	24.7	863	1219	1647	2059	1800	220	1758	4	11.0	7.1	184	260	351	439
1800	720	1758	16	43.3	28.2	986	1392	1881	2352	1800	310	1758	6	16.4	10.6	275	389	525	656
										1800	490	1758	10	27.1	17.6	457	646	872	1091

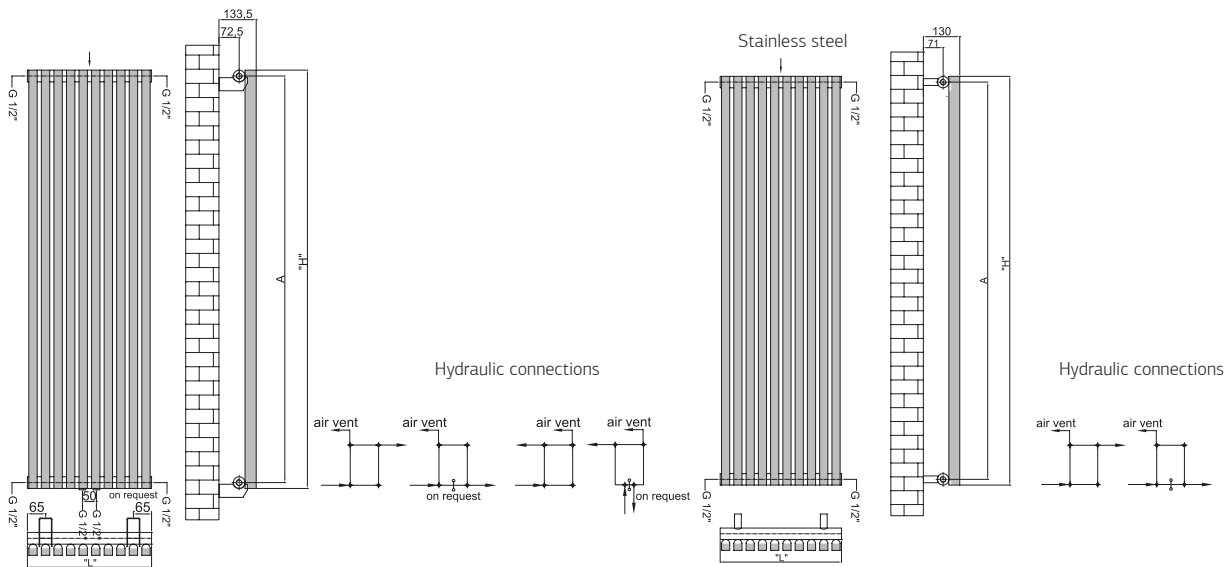



Vertica D Bi





Radiatoarele VERTICA D BI sunt fabricate folosind o tehnologie unică de sudare la interior care oferă o mai bună finisare astfel încât sudurile sunt practic invizibile. Are o configurație dublă, ceea ce îi oferă o putere termică sporită.

Our VERTICA D BI radiators are manufactured using state of the art welding technology, which gives a superior finish because the welds are virtually invisible. With its double configuration, VERTICA D BI boasts superior heat outputs, and can be accessorized with different shapes of towel and robe hooks.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K15 see pag 143

Height (H)	Length (L)	Centres (A)	No el	OUTPUT (watt)			
				$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	ral	ral	ral	ral
600	810	558	36	756	1067	1442	1803
600	990	558	44	831	1174	1586	1983
600	1215	558	54	1020	1441	1947	2434
600	1395	558	62	1171	1654	2236	2795

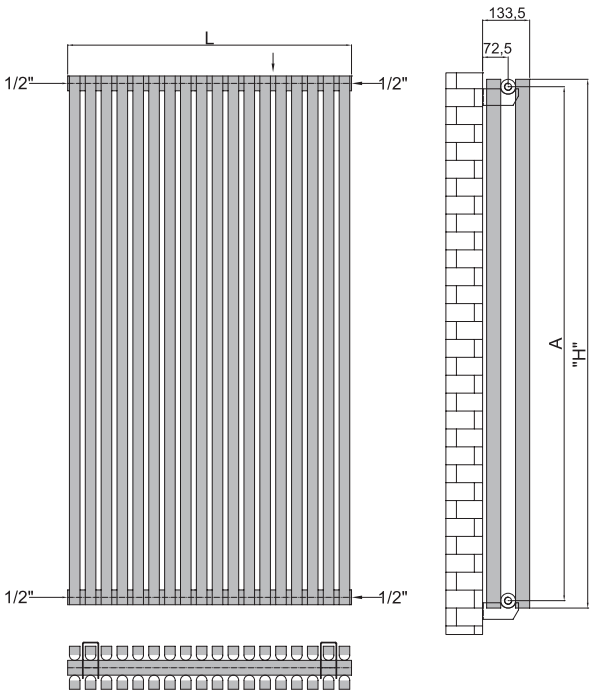



Vertica D Mirror

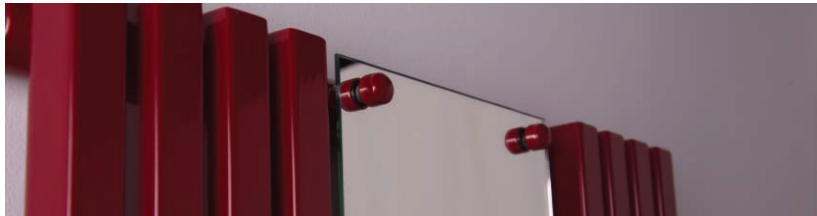


Un model nou care oferă căldură, confort și este completat de o superbă oglindă (finisaj bronz sau clasic). VERTICA D MIRROR cu siguranță va atrage atenția fiind un radiator ornamental practic și robust. Poate fi personalizat având la dispoziție o mare gamă de culori și accesorii.

Our exquisite new mirrored radiator provides warmth and comfort, and is accompanied by a full-length clear or bronze mirror to enhance and complement its beauty. An unique addition to your home, VERTICA D MIRROR demands attention yet retains a sense of practicality: high outputs, towel and robe hooks available on request, wide range of colour finishes.



Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K22 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
1500	535	1458	6	14.7	9.5	329	464	627	784
1500	625	1458	8	19.3	12.4	432	610	825	1031
1800	535	1758	6	17.2	11.1	387	547	739	923
1800	625	1758	8	22.6	14.6	510	720	973	1216

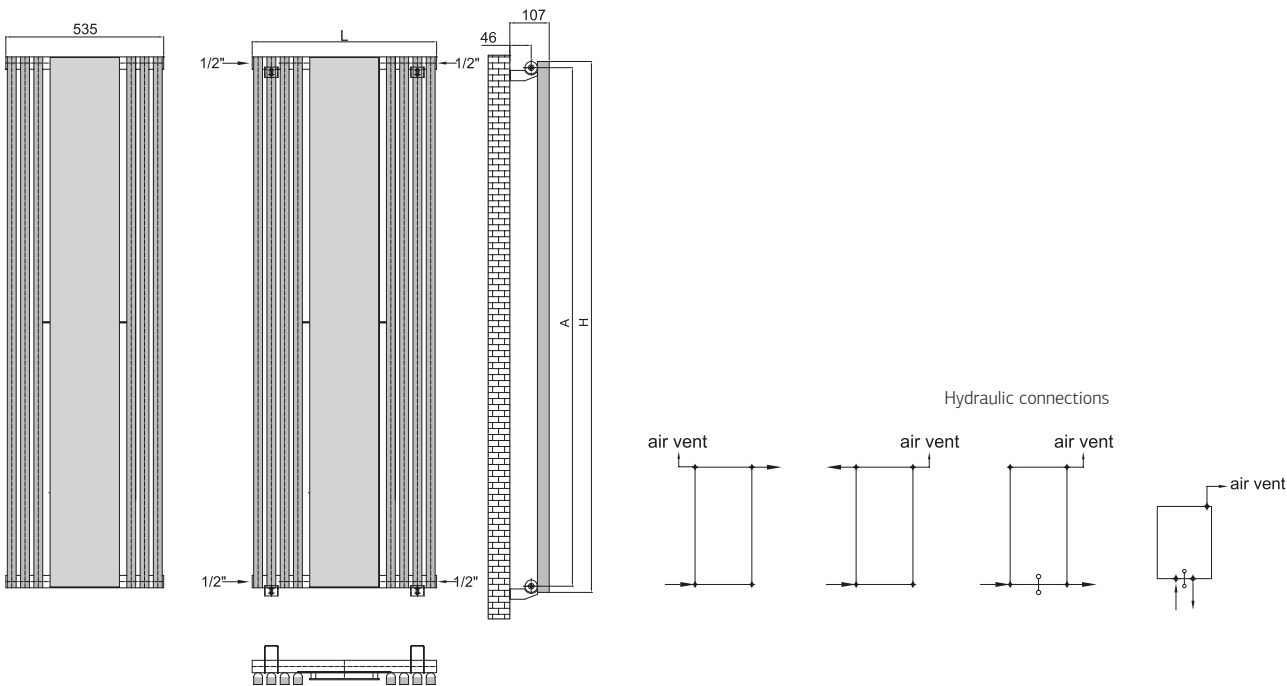



Vesta




VESTA are un design flexibil, poate fi fără dificultate personalizat astfel încât să se potrivească în orice design de interior. Inox, cromat, vopsit în nuanțe RAL la alegere, VESTA va arăta impresionant oricum.

This modular radiator is conveniently versatile allowing for any number of elements to meet your designing needs. Deploy your imagination and experiment with any variety of shapes and colours. Regardless of the combination the final product will be remarkable.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K23 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)											
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
600	580	440	12	30.3	20.7	592	455	438	836	643	619	1130	869	837	1412	1086	1046
600	680	440	14	34.4	24.1	688	529	509	971	747	719	1312	1009	972	1640	1262	1215
600	780	440	16	38.5	27.4	783	602	580	1106	851	819	1495	1150	1107	1868	1437	1384
600	880	440	18	42.6	30.8	879	676	651	1241	955	919	1677	1290	1242	2096	1613	1553
700	580	540	12	35.2	24.4	705	542	522	996	766	738	1346	1035	997	1682	1294	1246
700	680	540	14	36.0	28.4	820	630	607	1157	890	857	1564	1203	1159	1955	1504	1448
700	780	540	16	40.9	32.4	934	719	692	1319	1015	977	1783	1371	1320	2228	1714	1651
700	880	540	18	45.8	36.3	1049	807	777	1481	1139	1097	2001	1539	1482	2501	1924	1853
800	580	640	12	36.0	28.1	818	629	606	1156	889	856	1562	1201	1157	1952	1502	1446
800	680	640	14	41.7	32.7	952	732	705	1344	1034	996	1816	1397	1345	2270	1746	1682
800	780	640	16	47.5	37.3	1085	835	804	1532	1179	1135	2071	1593	1534	2588	1991	1917
800	880	640	18	53.2	41.9	1218	937	902	1721	1324	1275	2325	1789	1722	2906	2236	2153
1200	580	1040	12	55.7	42.9	1271	978	942	1795	1381	1330	2426	1866	1797	3032	2332	2246
1200	680	1040	14	64.7	49.9	1480	1138	1096	2090	1608	1548	2824	2172	2092	3530	2716	2615
1200	780	1040	16	73.7	57.0	1689	1299	1251	2385	1834	1766	3223	2479	2387	4028	3099	2984
1200	880	1040	18	82.7	64.0	1897	1460	1406	2680	2061	1985	3621	2785	2682	4526	3482	3353

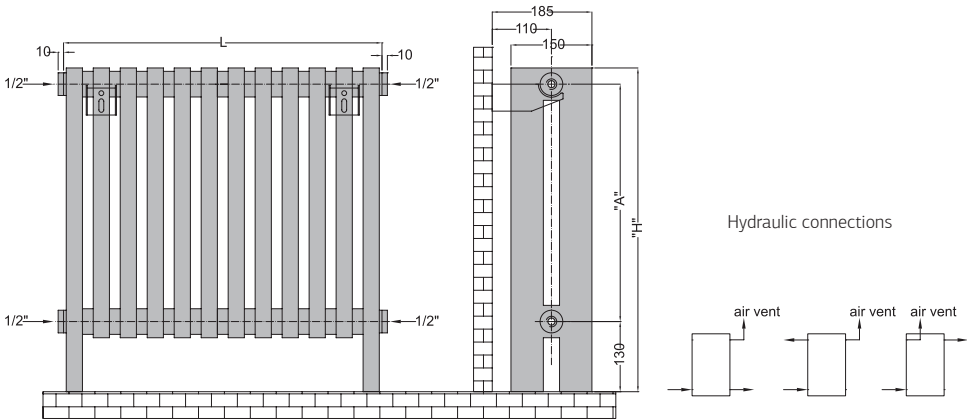



Vesta Uno




Prin construcția sa compactă, VESTA UNO este o prezență spectaculoasă în orice ambiant. Poate fi montat vertical pe perete sau pe podea, VESTA UNO este disponibil în variantă vopsită, cromată sau inox.

With its tubular construction, VESTA UNO makes an impact on any interior décor. Floor or wall mounted, VESTA UNO is suitable for home or workspaces, offering superb heat delivery. It can be personalized with finishes such as colours combination, chrome and stainless steel.



Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K15 see pag 143

Height (H)	Length (L)	Centres (A)	No el		Weight	Volume	OUTPUT (watt)											
							Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	pcs		kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stain- less steel	ral	chrome	stainless steel
600	600	440	12	10+2	14.5	9.7	315	242	233	445	342	330	602	463	446	752	578	557
600	700	440	14	12+2	16.8	11.3	366	282	271	517	398	383	699	537	518	873	672	647
600	800	440	16	14+2	19.2	12.9	417	321	309	589	453	436	796	612	589	995	765	737
600	900	440	18	16+2	21.5	14.5	468	360	347	661	508	489	893	687	661	1116	859	827
700	600	540	12	10+2	16.9	11.6	375	288	277	529	407	392	715	550	530	894	687	662
700	700	540	14	12+2	19.7	13.5	435	335	323	615	473	455	831	639	616	1039	799	769
700	800	540	16	14+2	22.4	15.3	496	382	368	701	539	519	947	728	701	1184	911	877
700	900	540	18	16+2	25.2	17.2	557	428	413	787	605	583	1063	818	787	1329	1022	984
800	600	640	12	10+2	19.4	13.4	434	334	322	613	472	454	828	637	614	1035	796	767
800	700	640	14	12+2	22.6	15.6	505	388	374	713	548	528	963	741	714	1204	926	892
800	800	640	16	14+2	25.7	17.8	575	443	426	813	625	602	1098	845	813	1373	1056	1017
800	900	640	18	16+2	28.9	20.0	646	497	479	912	702	676	1233	948	913	1541	1186	1142
1200	600	1040	12	10+2	29.2	20.8	672	517	498	949	730	703	1282	986	950	1602	1233	1187
1200	700	1040	14	12+2	34.0	24.2	782	602	579	1104	850	818	1492	1148	1106	1866	1435	1382
1200	800	1040	16	14+2	38.8	27.7	892	686	661	1260	969	933	1703	1310	1261	2129	1637	1577
1200	900	1040	18	16+2	43.6	31.1	1003	771	743	1416	1089	1049	1913	1472	1417	2392	1840	1772

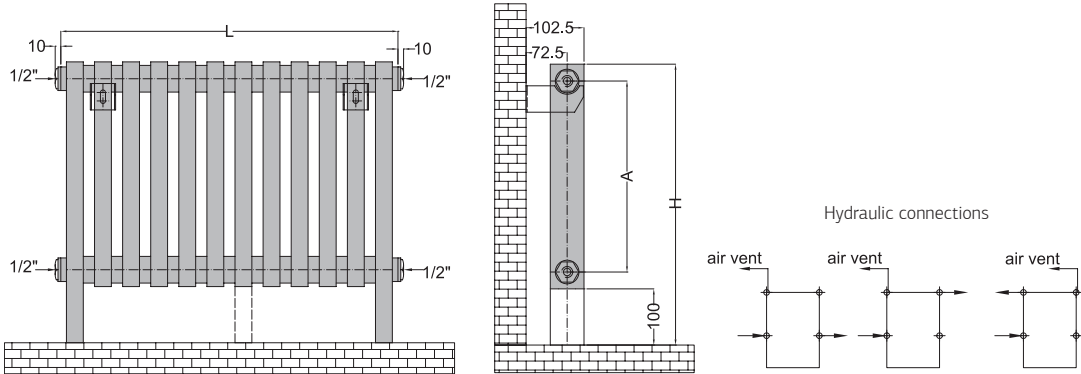



Wave




Un radiator cu adevărat elegant care oferă căldură și rafinament, WAVE este disponibil în orice culoare RAL. Cu elementii sai plați și arcuiți, WAVE este disponibil atât în variantă verticală cât și orizontală.

A luxury radiator, WAVE fills any room with warmth and elegance. With slim flat rectangular pipes waving back and forth, WAVE is available as a vertically or horizontally radiator, and in all RAL range finishing colours.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K26 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
850	400	814	10	10.4	2.8	244	344	465	581
850	520	814	13	13.5	3.6	317	447	605	756
850	600	814	15	15.6	4.1	365	516	698	872
1200	400	1164	10	14.3	3.7	335	474	640	800
1200	520	1164	13	18.5	4.8	436	616	832	1040
1200	600	1164	15	21.4	5.5	503	710	960	1200
1800	400	1764	10	20.9	5.2	493	696	940	1175
1800	520	1764	13	27.2	6.8	640	904	1222	1528
1800	600	1764	15	31.4	7.8	739	1043	1410	1763

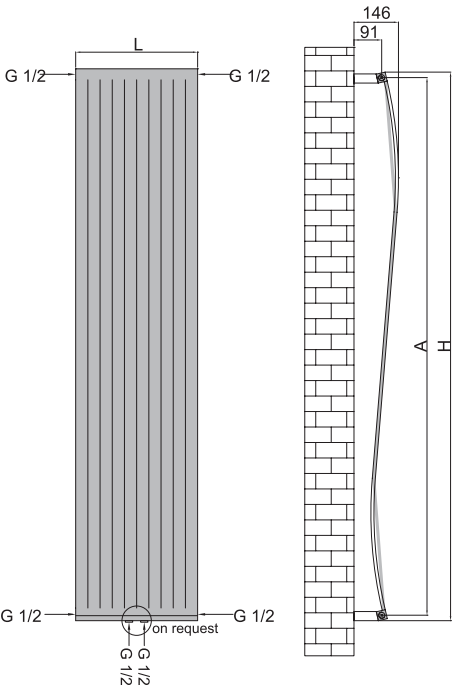


Hydraulic connections

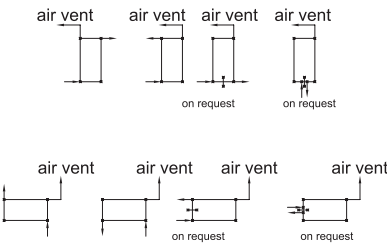



Apollo

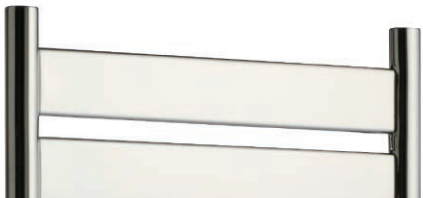

APOLLO este un radiator port-prosop solid, practic și atractiv. Contrastul dintre colectorii rotunzi și elementii ovali crează un efect vizual spectaculos. Este disponibil în finisaj crom și orice culoare RAL.


APOLLO is a solid, practical and attractive towel rail radiator. Its rounded columns which support contrasting flat panelled piping make it easy on the eyes. Available in sleek chrome and all RAL colours.



Max. working pressure 4 bar | Max. working temperature 120 °C | Mounting kit included: K02 see pag 143




Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)								
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome	
700	500	465	6	6.5	2.5	141	109	200	154	270	208	337	260	300
1050	500	465	9	9.8	3.7	164	126	232	178	313	241	391	301	300
1400	500	465	12	13	4.9	212	163	299	230	404	311	505	389	500

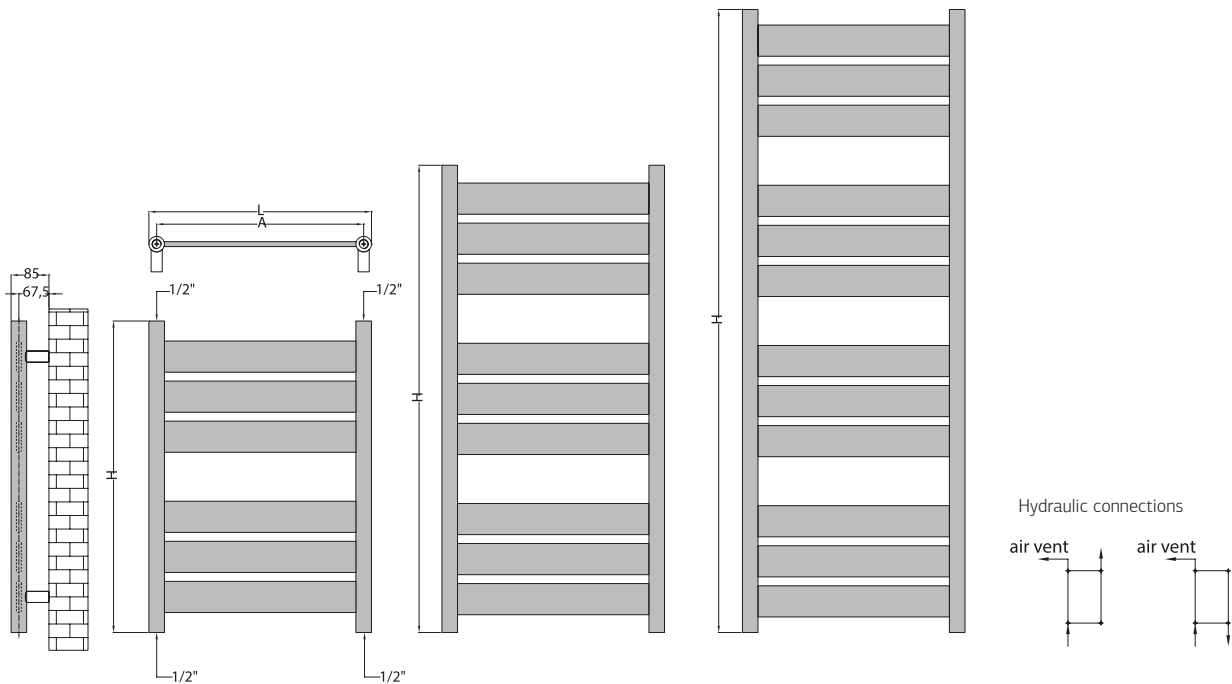



Aramis

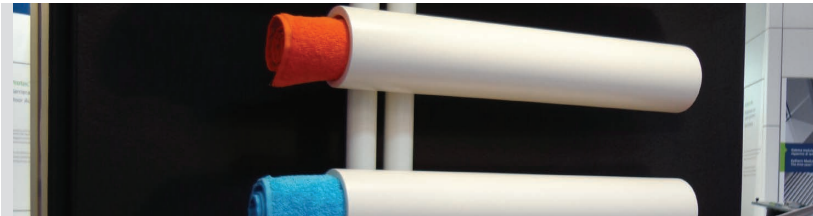

Designul unic al radiatorului ARAMIS crează un echilibru între colectorii subțiri și elementii tubulari deschiși la ambele capete. Este disponibil în orice culoare din gama RAL sau oțel inoxidabil și poate fi montat pe parte stângă sau pe partea dreaptă în funcție de preferințe.


Creating an unique visual effect, ARAMIS features slim columns connected to thick tubular rows which are open at either ends. Available in stylish colours or stainless steel, ARAMIS can be mounted left or right handed.



Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K03 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)									
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical	
mm	mm	mm	pcs	kg	l	ral	stainless steel	ral	stainless steel	ral	stainless steel	ral	stainless steel		
800	500	50	5	21.3	5.2	411	304	541	401	731	541	914	677	900	
1155	500	50	7	30.0	7.4	578	428	760	563	1027	761	1284	951	900	
1512	500	50	9	38.6	9.5	744	551	979	725	1323	980	1654	1225	1200	

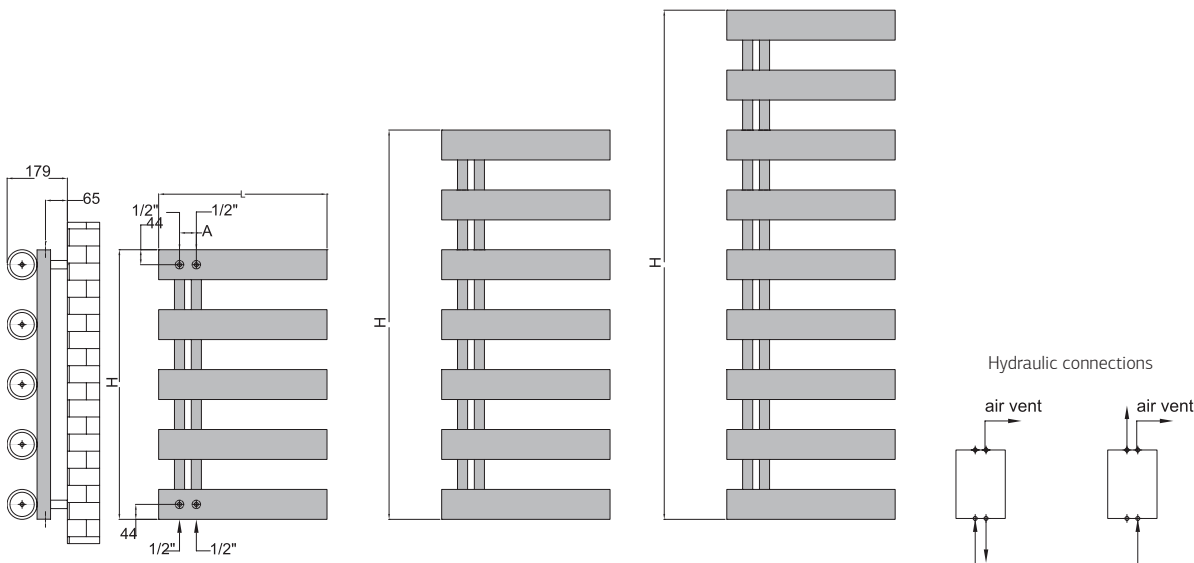



Aztec




Disponibil în orice culoare RAL, crom sau inox, AZTEC este un radiator port-prosop care se desprinde de structura clasică tip scară a unui radiator de baie. Organizarea asimetrică a elementelor oferă spațiu generos pentru depozitarea a cât mai multor prosoape.

AZTEC with its simple and elegant design, puts a new twist on a classic ladder style towel radiator. A square asymmetric tubular rail with room to warm up plenty of towels, AZTEC is available in RAL colours, chrome and stainless steel.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)											
					Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
915	600	560	7.18	4.55	167	128	124	236	181	175	319	245	236	398	306	295
1265	600	560	9.61	6.08	223	172	165	315	243	234	426	328	316	533	410	395
1615	600	560	12.04	7.62	350	269	259	494	380	366	668	514	495	835	642	618

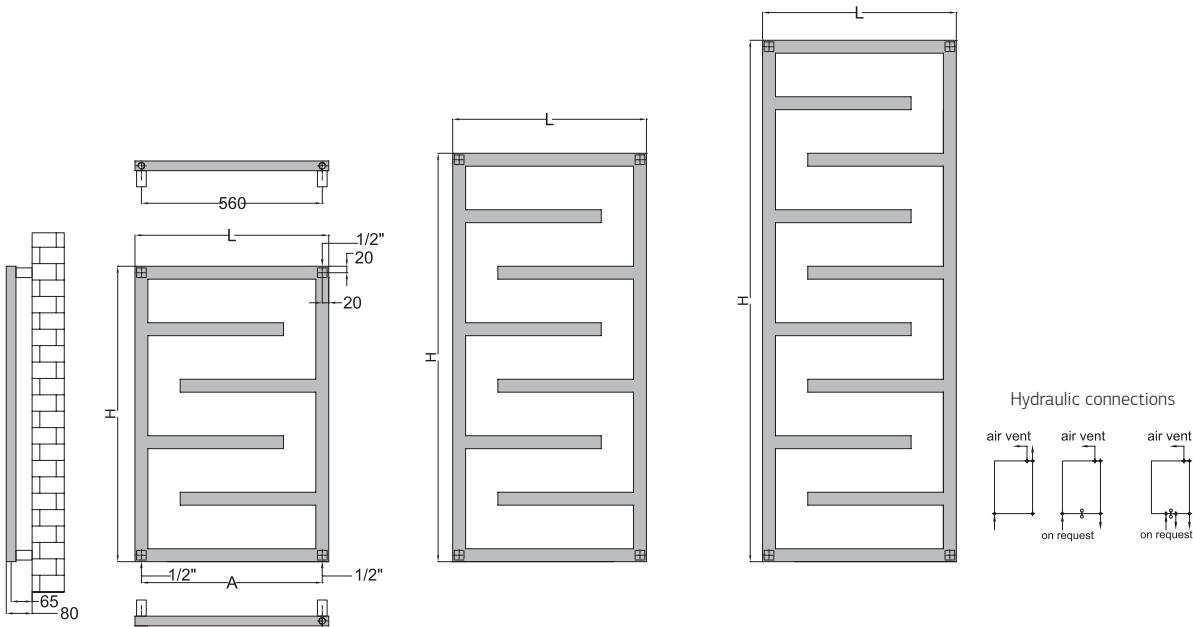



Cora



Radiatorul de baie asimetric CORA este combinația perfectă dintre practic și estetic. Poate fi poziționat pe partea stangă sau dreaptă în funcție de preferință.



Beautiful and practical, CORA is an asymmetrical towel drying radiator, a wonderful addition to a bathroom. It can be left or right handed upon your need. Its rounded tubes blend form and function, allowing many towels to be warmed at once.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K02 & K12 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)								
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical
mm	mm	mm	pcs	kg	l	ral	stainless steel	ral	stainless steel	ral	stainless steel	ral	stainless steel	
1230	600	50	24	10.82	6.13	281	208	397	294	536	397	670	496	600
1550	600	50	30	13.55	7.68	352	261	497	368	671	497	839	622	600

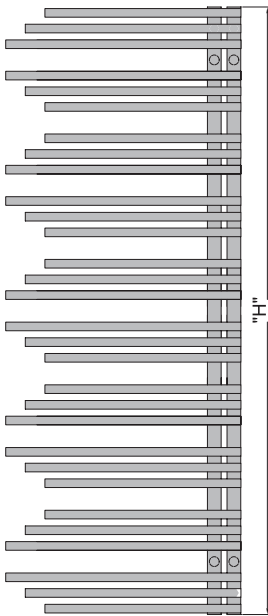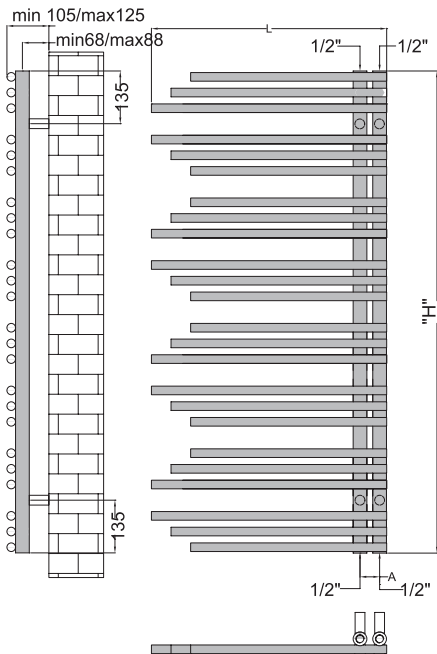

Hydraulic connections





Dora 70



DORA 70 completează gama de radiatoare de baie moderne cu un design rectangular și elegant. Poate fi instalat în funcție de preferințe, pe partea stângă sau dreaptă. Este disponibil în orice culoare RAL și crom, ceea ce îl face perfect pentru baie, bucătărie sau practic orice cameră în care confortul este o prioritate dar spațiul este limitat.


Stretching out asymmetrically to one side, DORA 70 is notably stylish with its slim, rectangular pipes. It can be mounted left or right handed upon your request. Available in all RAL colours and sleek chrome, DORA 70 provides an attractive means to heat bathrooms, kitchens, laundry rooms, foyers and virtually any room where comfort is of prime importance and space is limited.




Max. working pressure 4 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143




Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)									
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome		
800	500	100	6	7.51	2.73	167	129	236	182	319	245	399	307	300	
1235	500	100	9	11.36	4.15	253	195	357	275	483	371	603	464	600	

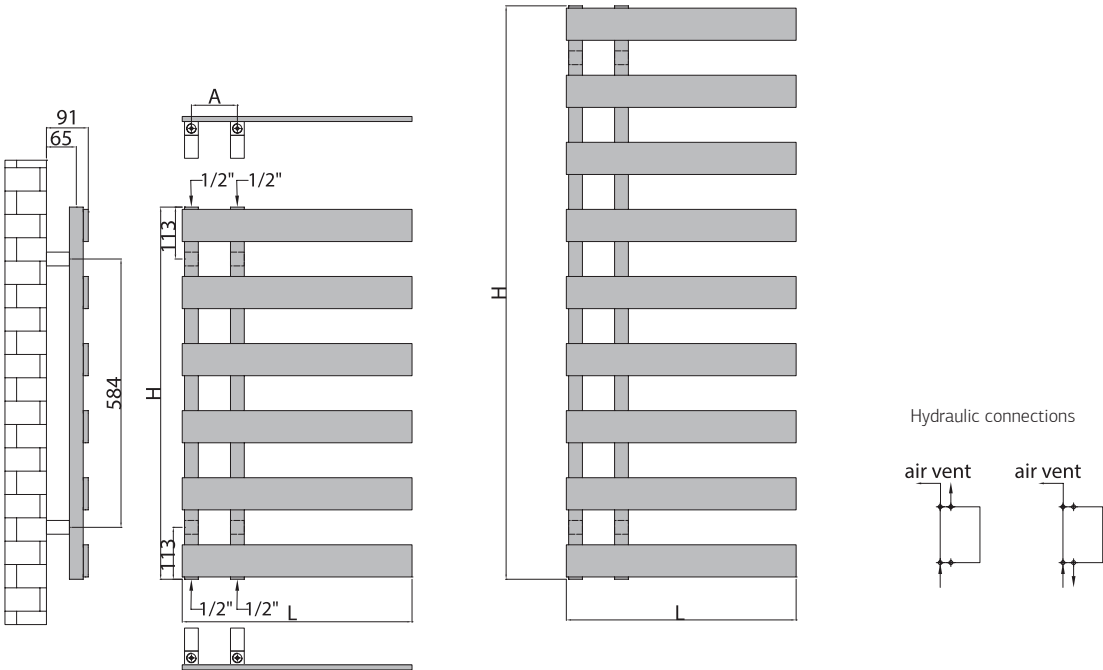

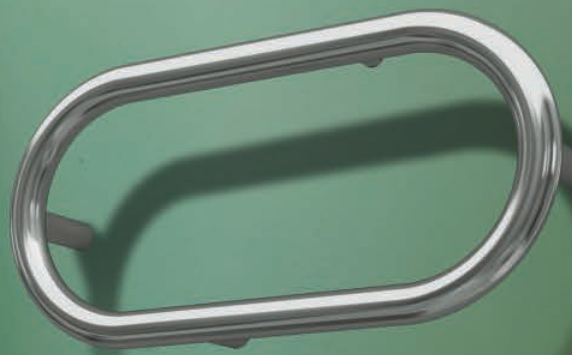

Ellie

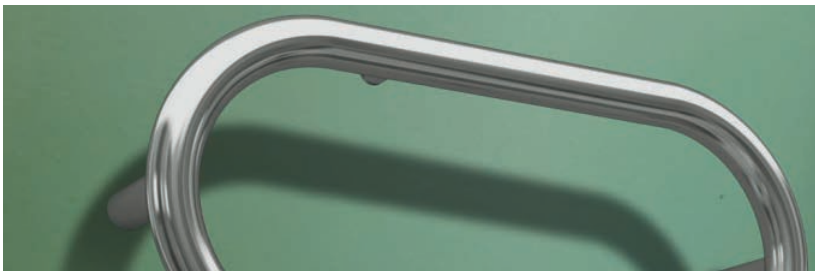


Special conceput pentru încălzirea prosoapelor, ELLIE are un design unic cu un sistem de prindere în perete care nu îi alterează simplitatea și puritatea formei.

ELLIE isn't designed to fill your room with heat, the goal of its existence is simply to heat your towels, in the bathroom or the kitchen!
Unique design, ELLIE has clever wall brackets, just to maintain the formality and purity of the shape.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K27 or K28 or K29 see pag 143

Height (H)	Length (L)	Centres (A1)	Centres (A2)	Weight	Volume	OUTPUT (watt)											
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	mm	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
295	600	200	260	1.77	1.15	44	34	33	62	48	46	84	65	62	105	81	78

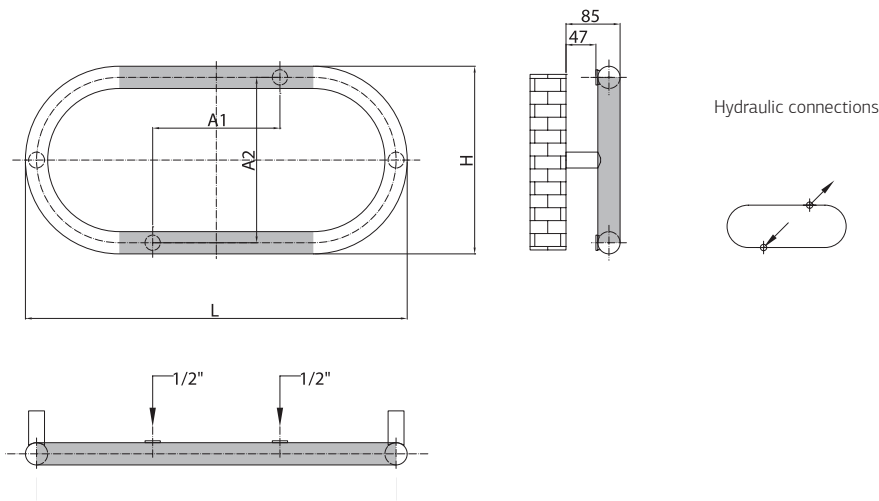



Ellie 3

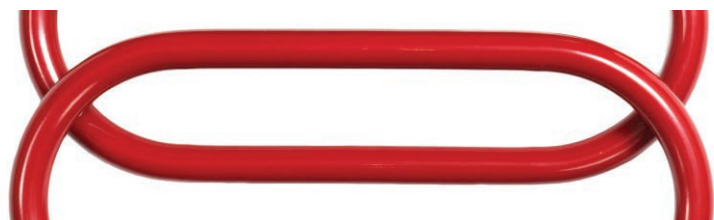


Prin forma sa rotundă, ELLIE 3 se prezintă ca element artistic de încălzire, fiind accesoriul perfect pentru baie sau bucătărie. Oferă un spațiu generos pentru prosoape și poate fi personalizat cu accesoriile special proiectate, cum ar fi agatatoarele rotunde (robehook).

This unique radiator is simply lovely. Featuring rounded edges, ELLIE 3 is a work of heating art which feels right at home in the kitchen and bathroom alike. Plenty of space for large towels, ELLIE 3 can be cutomised with that little something extra from our collection of special accessories, like our stylish robehooks.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K02 see pag 143

Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)											
					Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
610	600	550	5.32	3.45	132	102	98	186	143	138	252	194	187	315	242	233

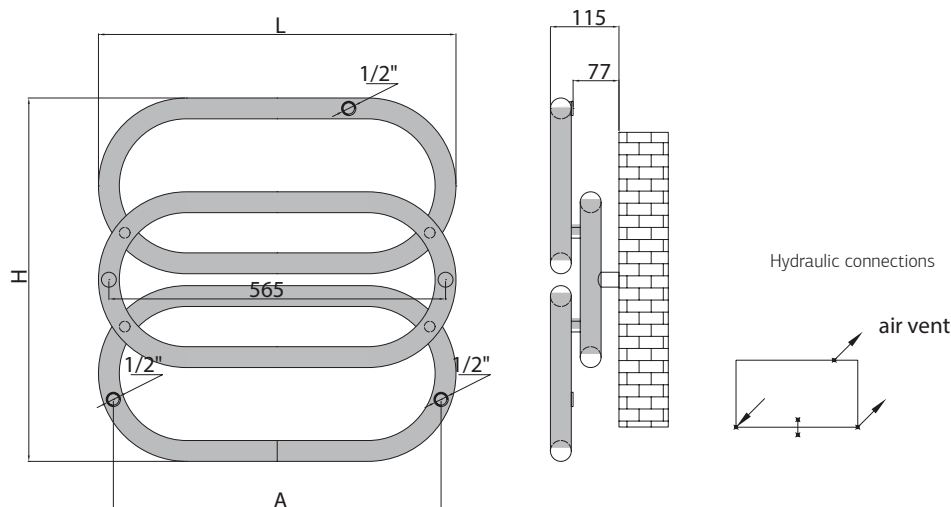



Empire




Un radiator din oțel care amintește de stilul tradițional englezesc, EMPIRE devine piesa de rezistență într-un ansamblu de design clasic. EMPIRE poate fi montat pe perete sau pe podea și întrunește toate criteriile de eleganță autentică și rafinament, fiind disponibil cromat sau în orice culoare RAL.

This traditional English steel towel rail is an ideal option for restoring a period setting or creating an individual style. Floor standing or wall mounted, EMPIRE is all about authentic elegance, distinguished luxury, all available in chrome or RAL colours.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K03 or K07 see pag 143

	Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)							
						$\Delta t=30^{\circ}\text{C}$		$\Delta t=40^{\circ}\text{C}$		$\Delta t=50^{\circ}\text{C}$		$\Delta t=60^{\circ}\text{C}$	
	mm	mm	mm	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
E48	480	480	430	2.6	1.2	52	40	73	56	99	76	124	95
E60	920	600	550	5.1	2.5	106	82	150	115	202	156	253	195
E70	1000	700	650	5.7	2.8	121	93	171	132	232	178	289	223

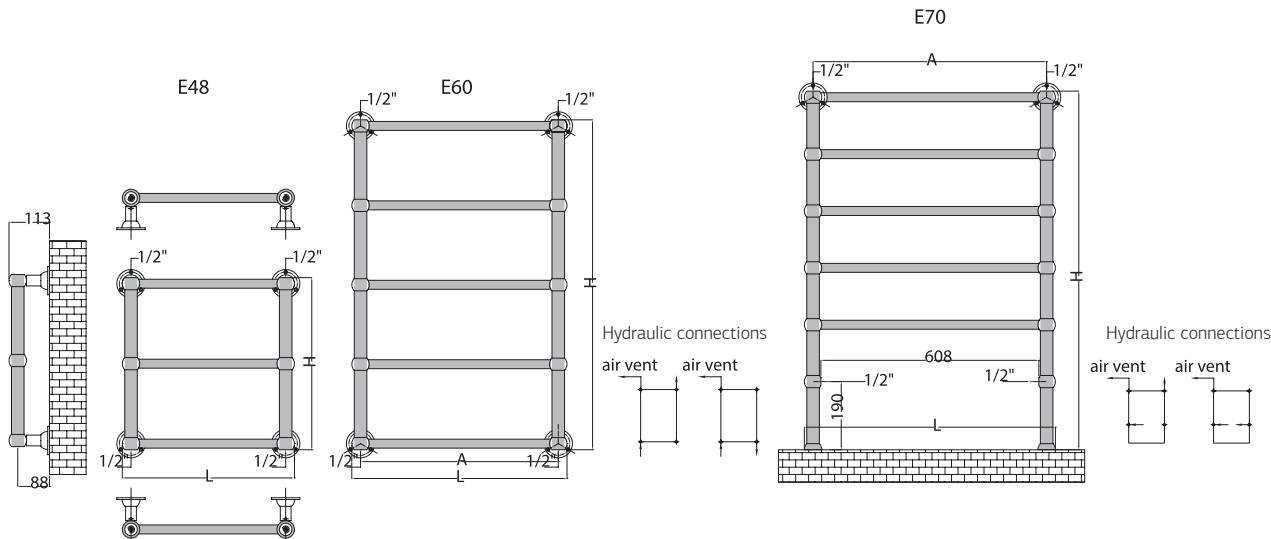



Empire Inspire




Disponibil atât în variantă vopsită cât și cromată, EMPIRE INSPIRE reprezintă pe deplin eleganță și lux și adaugă o notă de rafinament oricărei încăperi.

Available in a variety of colours and sleek chrome, EMPIRE INSPIRE has a luxurious design, its chic design transforms any bathroom into one suitable for royalty.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K07 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
						$\Delta t=30^{\circ}\text{C}$		$\Delta t=40^{\circ}\text{C}$		$\Delta t=50^{\circ}\text{C}$		$\Delta t=60^{\circ}\text{C}$	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
935	600	550	6	12.5	5.6	210	161	296	228	401	308	501	385

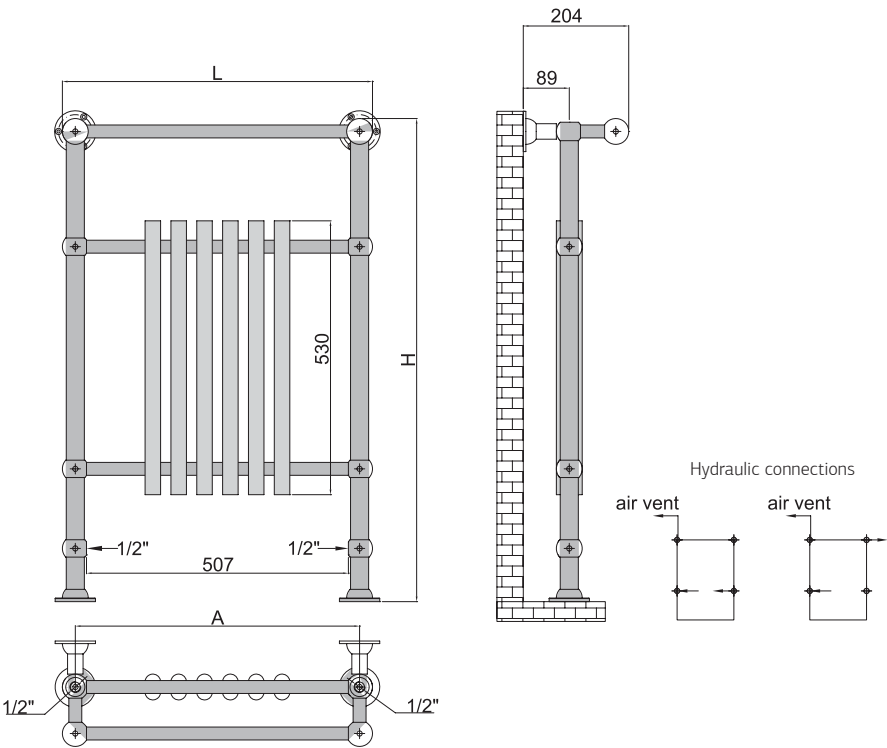



Empire Multi




EMPIRE MULTI are toate calitățile pentru a fi perfect pentru orice baie: putere termică, design spectaculos și versatilitate. Un radiator port-prosop somptuos care a fost atent proiectat pentru a oferi performanță maximă.

With a high degree of heat output, EMPIRE MULTI is the ideal combination of versatility, attractiveness, and warming comfort perfect for any bathroom or utility room.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K03 or K07 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)							
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
935	600	550	8	19.2	8.5	333	256	470	362	636	489	795	611

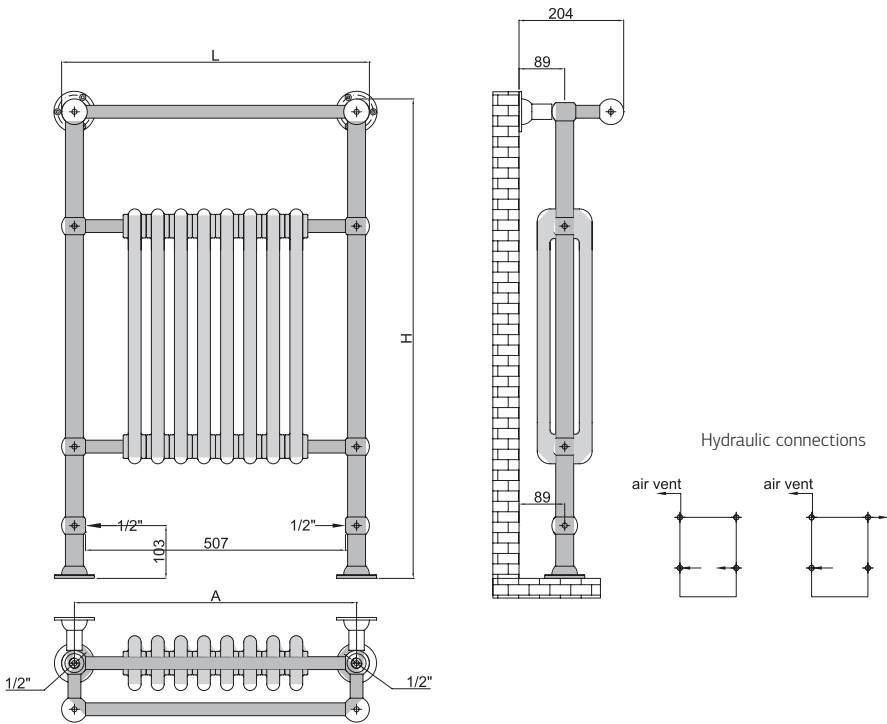



Esse




Un model ultra suplu cu un profil subțire, ușor curbat care se încadrează perfect în orice schemă de design modern. ESSE poate fi folosit fie ca element suplimentar de încălzire sau poate fi sursă unică de căldură pentru un spațiu mai mic.

The ultra slim ESSE features flat tubes with a subtle curving profile that flows smoothly, looking perfect in any contemporary setting. With its attractive shape, ESSE can either be used as a supplemental heater or be the sole source of heat for a smaller room.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K25 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral
540	850	500	6	6.0	1.4	142	201	271	339

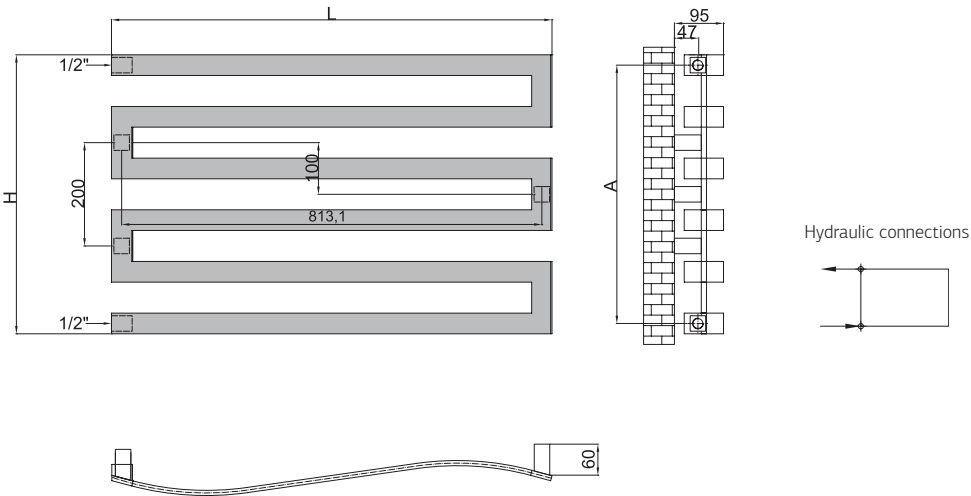



Filon




FILON este un radiator șic și modern, ideal pentru încălzirea prosoapelor. Este un accesoriu perfect pentru baie și bucătărie, compact și ușor de accessorizat cu agățătoare pentru prosop. FILON este alegerea cea mai bună atunci când stilul și eficiența sunt o prioritate.

With a unique shape, FILON looks stylish and modern, while retaining its function as a towel warming bar. Neat and tidy, FILON can be accessorized with stylish hooks to hang towel from. You don't have to sacrifice style to make things fit, just choose our brilliant FILON for complementing your bathroom or kitchen.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K02 or K12 see pag 143

Height (H)	Length (L)	Centres (A1)	Centres (A2)	Weight	Volume	OUTPUT (watt)											
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	mm	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
295	648	200	260	1.5	0.98	38	29	28	54	42	40	74	57	54	92	71	68

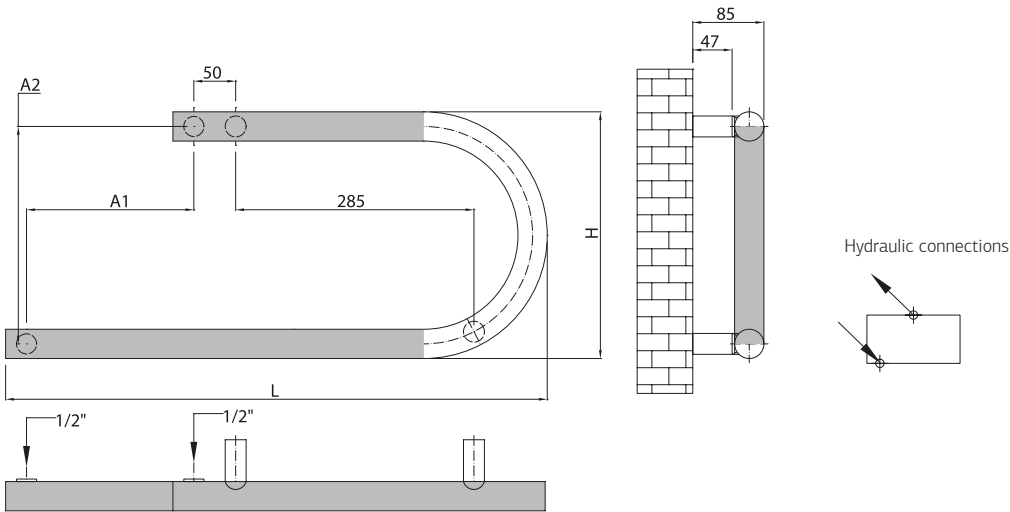



Fingers



FINGERS este un radiator elegant pentru baie și bucătărie, versatilitatea sa fiind completată de puterea termică excelentă. Profilul simetric cu elemente poziționate stânga - dreapta oferă spațiu generos pentru prosoape și suficientă căldură pentru a păstra camera confortabilă și prosoapele încălzite. Disponibil în orice culoare RAL și oțel inoxidabil.


FINGERS is a stylish radiator for kitchens and bathrooms alike, and this versatility is paired with excellent heat outputs. Its symmetrical design winds left and right providing lots of space for towels, while providing just the right heat to keep your room cosy and your towels warm. Available in RAL colours and stainless steel.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K02 or K12 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)								
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		
mm	mm	mm	pcs	kg	l	ral	stainless steel	ral	stainless steel	ral	stainless steel	ral	stainless steel	Electrical
1200	700	72	24	8.97	5.00	238	177	337	249	455	337	564	418	500
1600	700	72	32	11.96	6.67	318	236	449	333	607	449	752	557	600

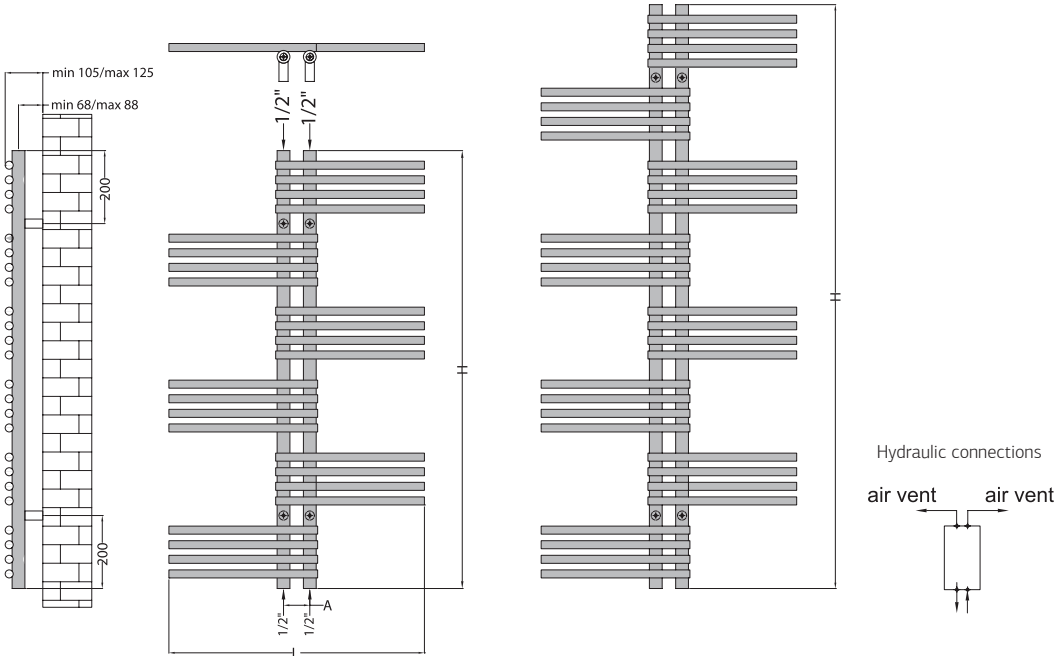



Kazar




KAZAR va aduce acel plus de stil și eleganță de care este nevoie în orice cameră, baie sau bucătărie. Radiator solid, practic și atractiv, încălzește în mod eficient atât camera cât și prosoapele pentru un confort sporit. Disponibil în toate finisajele, KAZAR este unic, în special în versiunea satinată de oțel inoxidabil fiind realizat manual de către profesioniști pentru a asigura acestui radiator o calitate și un aspect excepțional.

KAZAR is a wonderful addition to any room, bathroom or kitchen. It is a solid, practical and attractive radiator that will heat your room and provide you the luxury of a warm fluffy towel to wrap yourself in. Available in all finishes, KAZAR is an unique pieces, especially in a beautiful brushed stainless steel, the finish being applied by hand by highly skilled metalworkers meaning yours will be 100% unique.



Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)											
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
780	500	50	4	7.4	2.8	127	97	94	179	138	132	242	186	179	302	232	224
780	600	50	4	8.3	3.1	143	110	106	202	156	150	274	210	203	342	263	253
960	500	50	5	9.1	3.4	157	121	116	222	171	164	300	230	222	375	288	277
960	600	50	5	10.3	3.9	178	137	132	251	193	186	340	261	252	425	327	314
1140	500	50	6	10.9	4.1	187	144	139	265	204	196	358	275	265	447	344	331
1140	600	50	6	12.3	4.6	213	163	157	300	231	222	406	312	300	507	390	376
1320	500	50	7	12.6	4.7	218	168	161	308	237	228	416	320	308	520	400	385
1320	600	50	7	14.3	5.4	247	190	183	349	268	259	472	363	349	590	453	437
1500	500	50	8	14.4	5.4	248	191	184	350	270	260	474	364	351	592	455	439
1500	600	50	8	16.3	6.1	282	217	209	398	306	295	538	414	398	672	517	498

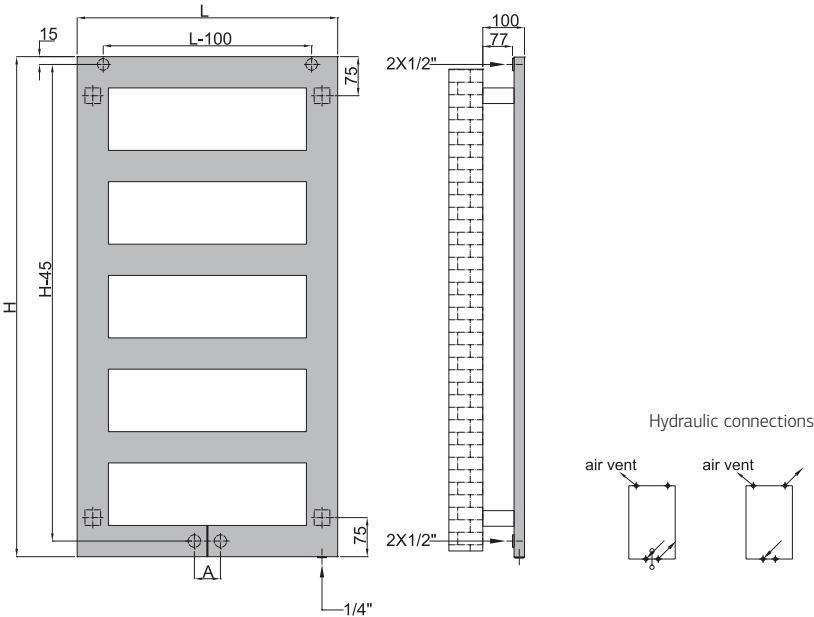



Quebis



QUEBIS este un radiator care oferă ceea ce promite: design clasic, calitate și putere termică mare. Acest radiator elegant dar practic va încălzi orice încăpere în timp ce încălzește prosoparele ușor și eficient.


Straightforward radiator, QUEBIS does its job wonderfully. Its steel square tubes create a very attractive towel rail. This elegant, yet practical towel rail heats the room whilst supporting towels with ease.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143



Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)								
					Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical
mm	mm	mm	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome	
700	500	470	6.1	2.4	151	116	214	164	289	222	361	278	300
1100	500	470	9.9	3.9	244	188	345	265	466	358	582	448	500
1550	500	470	14.1	5.6	349	269	493	380	667	513	833	641	600

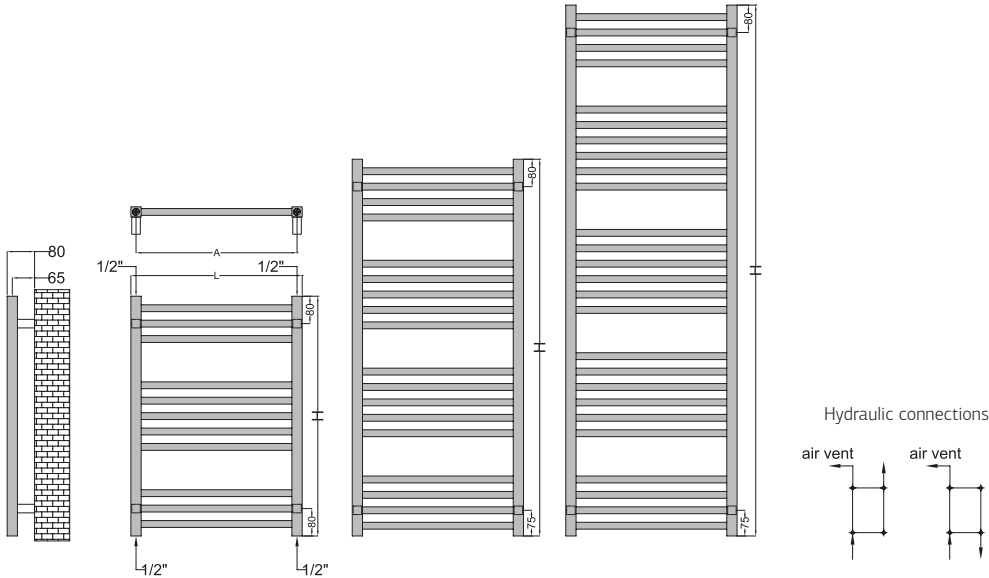



Quebis Round



QUEBIS ROUND este un radiator port-prosop care se potrivește în orice ambient având în același timp putere termică ridicată. Datorită stilului minimalist, QUEBIS ROUND este cea mai bună alegere pentru orice bucătărie sau baie.


QUEBIS ROUND is an exquisitely finished towel rail that would suit any home, with a great heating output. With its minimalist style, this a towel warmer that works in both kitchens and bathrooms.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143




Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)								
					Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical
mm	mm	mm	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome	
700	500	470	6.1	2.4	151	116	214	164	289	222	361	278	300
1100	500	470	9.9	3.9	244	188	345	265	466	358	582	448	500
1550	500	470	14.1	5.6	349	269	493	380	667	513	833	641	600

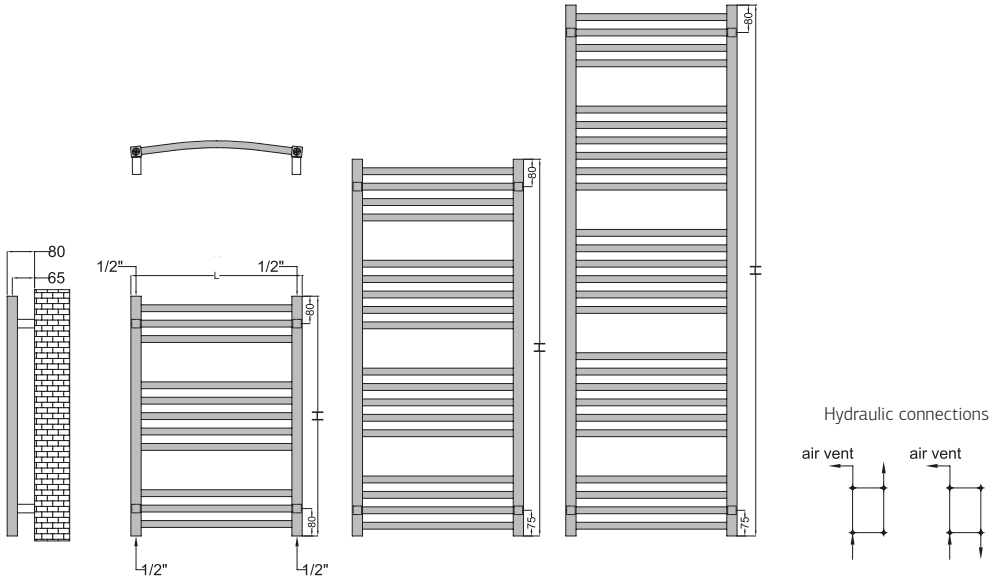



Sera

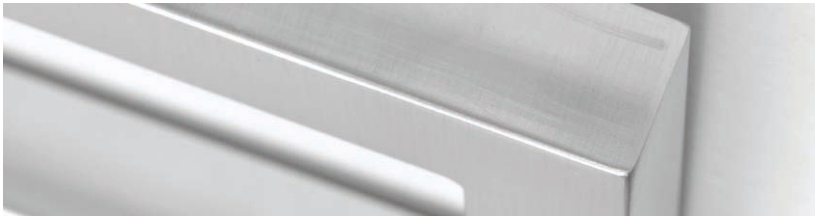

Cu designul său modern, SERA completează perfect orice cameră. Disponibil în toate finisajele, SERA este perfect pentru orice bucătărie sau baie, adăugând un plus de stil în orice locuință.


Modern styled towel rail with its contemporary look and feel, SERA is sure to compliment any modern room. Available in all finishes and also in electric version, SERA can suit any bathroom or kitchen, bringing that designer feel into your home.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K24 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	Electrical
450	580	550	4	3.87	2.10	95	73	70	134	103	99	181	140	134	227	174	168	150
730	580	550	6	5.88	3.19	145	111	107	204	157	151	276	212	204	345	265	256	300
1010	580	550	8	7.89	4.29	194	149	144	274	211	203	370	285	274	463	356	343	300
1570	580	550	12	11.9	6.5	293	225	217	414	318	307	559	430	414	699	538	518	600

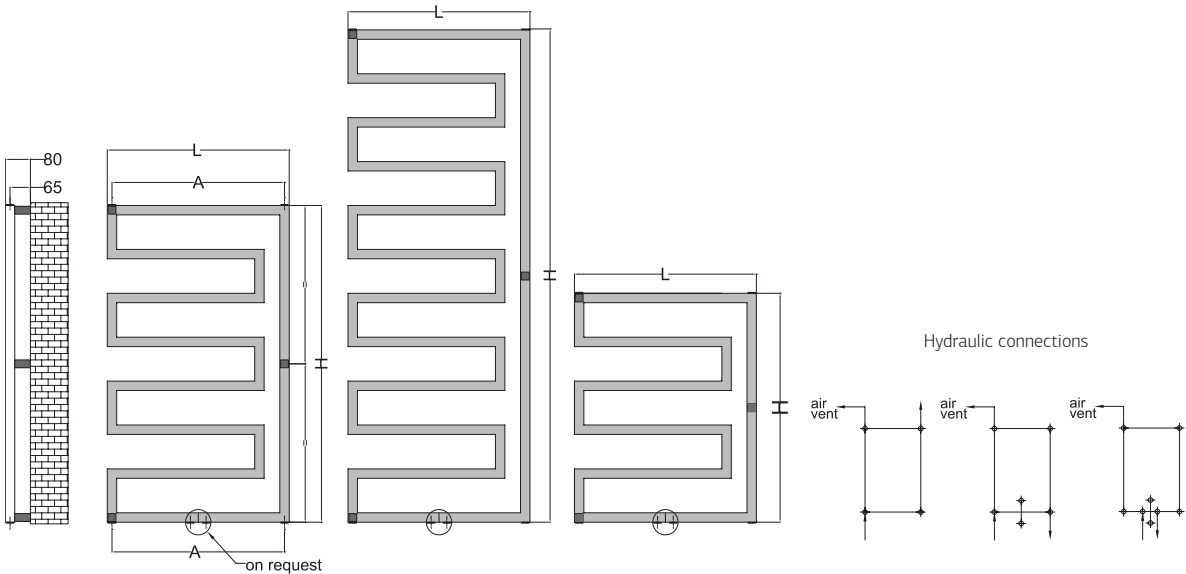



Serene




SERENE este un radiator contemporan, perfect pentru încălzirea mai multor prosoape și pentru a asigura confortul termic în orice baie modernă, bucatărie sau altă încăpere. Disponibil în finisaj cromat, vopsit RAL și inox.

SERENE is a contemporary radiator, just perfect for warming multiple towels at once and distributing heat in any modern bathroom, kitchen or laundry room. Available in chrom, Ral colours and stainless steel.



Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)											
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
900	500	460	8	12	4.9	222	171	164	313	241	232	424	326	314	529	407	392
1170	500	460	10	15	6.2	280	215	207	395	304	293	534	411	396	668	514	495
1440	500	460	12	18	7.5	338	260	250	478	367	354	645	496	478	807	621	598

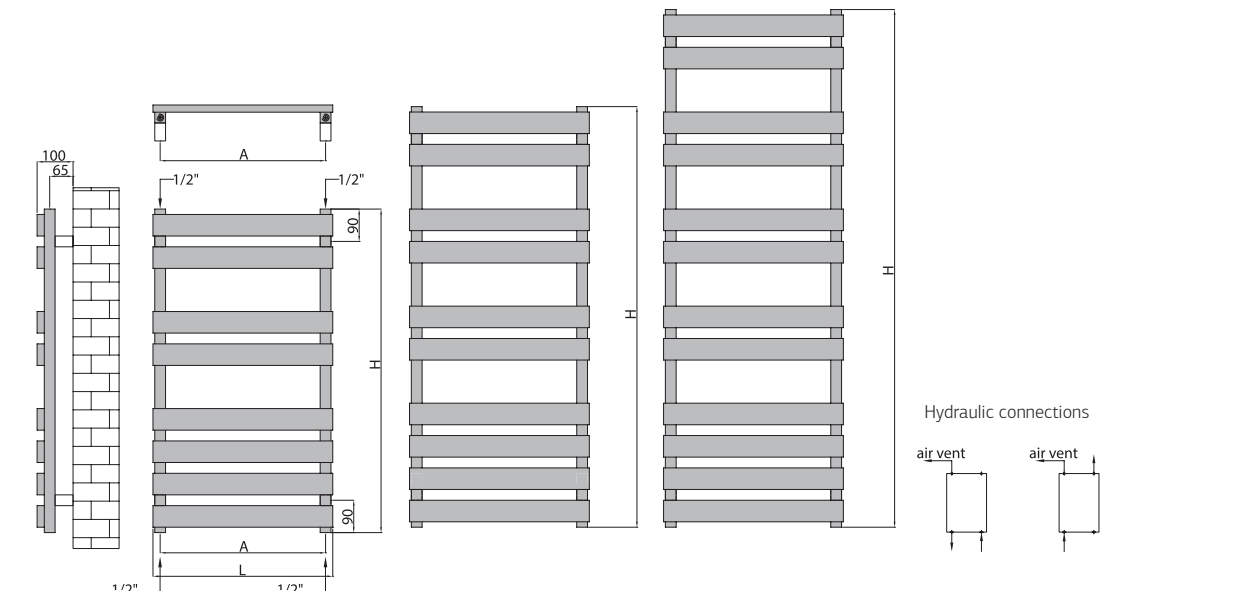



Serpentine




SERPENTINE este un radiator unic, simplu și elegant. Acest radiator depășește limitele unui element de încălzire și devine o adevărată piesă de mobilier. Ca de obicei, clienții noștri pot personaliza dimensiunile și alege finisajul: culori RAL, crom sau inox.

SERPENTINE is an unique, simple and elegant radiator. No longer just a heating object, SERPENTINE is a item of furniture for every home. As usual our customers can personalize the sizes and finishes, beautiful RAL colours, chrome plated or stainless steel.



Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K24 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)											
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C		
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
590	500	560	5	3.8	2.1	96	74	71	135	104	100	424	141	135	228	175	169
1150	500	1120	9	6.9	3.8	175	135	130	248	191	183	534	257	248	417	321	309

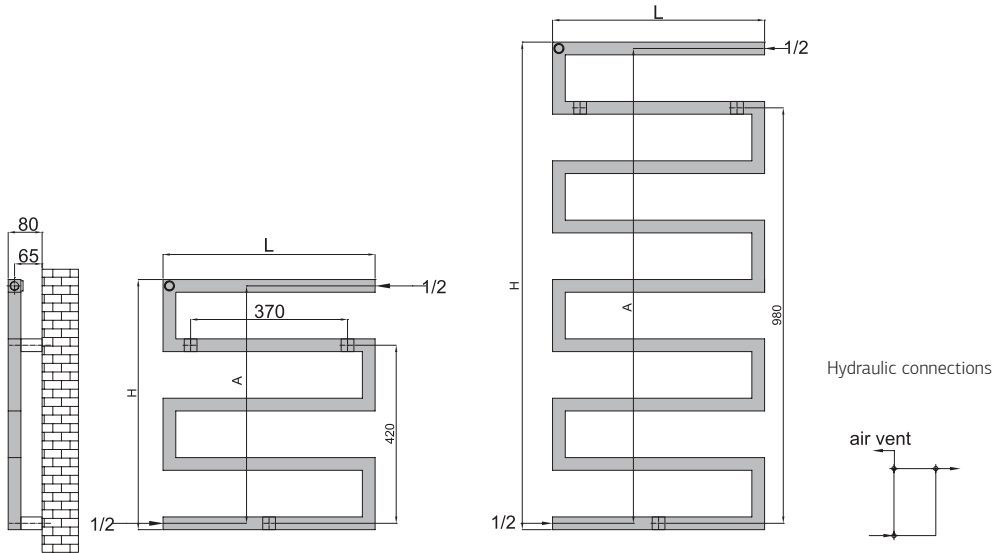



Smart U







SMART U are un design funcțional ce permite agățarea sau depozitarea prosoapelor pe raftul său. Astfel veți păstra prosoapele calde în timp ce economisiți spațiu. În crearea acestui radiator am fost inspirați de obiectele si obiceiurile zilnice, încercand astfel să le îmbunătățim prin formă și funcționalitate.

SMARTU U has a very functional shape to hang or store towels upon its shelf, so you can keep your towels warm and snug on, while not taking up too much space itself. The design inspiration for this small radiator is the expansion of the every day objects in their forms and functionality.



Max. working pressure 7 bar | Max. working temperature 120°C | Mounting kit included: K06 see pag 143

Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)							
					Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C	
mm	mm	mm	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome
315	800	660	8.1	3.7	214	165	303	233	409	315	491	378

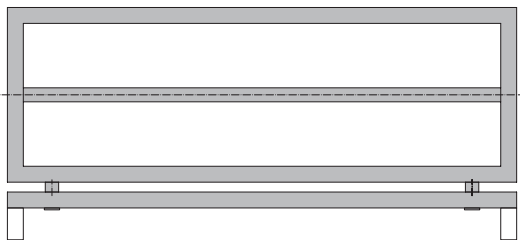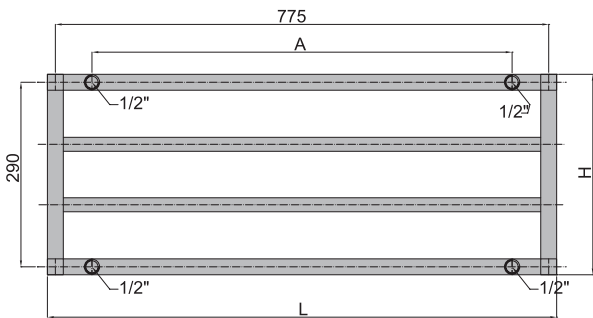



Upper



UPPER reprezintă eleganta și stil prin simplitatea formelor drepte. Designul minimalist cu elemente rectangulare și subțiri oferă suficient spațiu pentru depozitarea și încălzirea prosoapelor. UPPER este disponibil în finisaj crom, oțel inoxidabil și în culori RAL.



With its design, UPPER represents style in its simplest straight form. Its slim squared tubes leave a large space in-between, giving a minimalistic appearance to this radiator and allowing ample room for several towels. UPPER is available in sleek chrome finish, and also in stainless steel and Ral colours.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143




Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	Electrical
1200	500	470	8	5.5	2.9	184	142	137	260	200	193	352	271	261	440	338	326	300
1500	500	470	10	6.9	3.6	230	177	171	325	250	241	440	338	326	550	423	407	500
1800	500	470	12	8.3	4.4	276	213	205	390	300	289	527	406	391	659	507	488	600

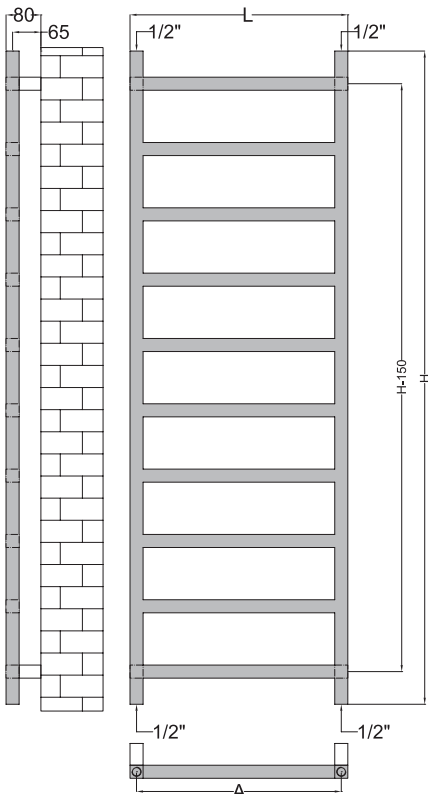



Upper Quadro

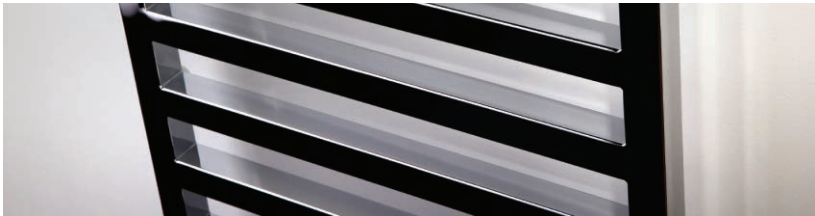

UPPER QUADRO demonstrează că nu există limitari în ceea ce privește designul unui radiator. Un adevărat element estetic, practic și robust, UPPER QUADRO devine piesa de rezistență în bucătărie sau baie putând fi accesoriizat cu un agățător elegant și util (robehook).


No longer a simple ladder rail design, UPPER QUADRO push the boundaries of what can be done with metal, heat and water to create stunning radiator designs. With a square elegant robehook, UPPER QUADRO is just perfect for both kitchens and bathrooms



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)								
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome	
780	500	50	11	8.59	4.7	206	158	291	224	393	302	491	378	500
1005	500	50	14	10.9	6	263	202	371	286	502	386	628	483	600
1230	500	50	17	13.3	7.3	320	246	452	348	611	470	764	588	600
1530	500	50	21	16.5	9	396	305	559	430	756	582	945	727	900
1830	500	50	25	19.7	10.7	472	363	666	512	900	692	1125	865	900

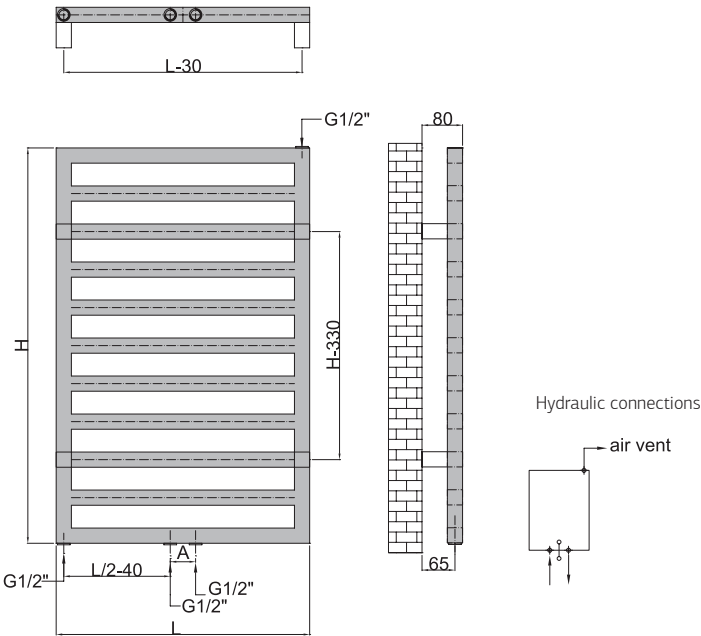



Vulcan NV



VULCAN NV este un adevărat element arhitectural care oferă personalitate oricărei camere. Un radiator practic și elegant, VULCAN NV este potrivit atât în baie cât și în bucătărie: încălzește eficient camera și permite depozitarea și încălzirea eficientă a prosoapelor. Disponibil în finisaj crom sau vopsit în culori RAL.


VULCAN NV can suit any bathroom or kitchen with its sequential gaps, designating spaces for more towels and larger towels too. An architectural work of heating art, VULCAN NV becomes a feature of the room, transforming from just a source of heat, into a focal point of design in the room. Avaiable in Ral colours and chrome.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K03 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)									
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome		
860	565	515	12	8.9	3.1	220	169	310	239	420	323	524	403	500	
1160	565	515	16	12.0	4.2	294	226	415	319	560	431	700	539	600	
1460	565	515	20	15.0	5.2	367	283	519	399	701	539	877	674	600	
1760	565	515	24	18.0	6.3	441	339	623	479	842	648	1053	810	900	

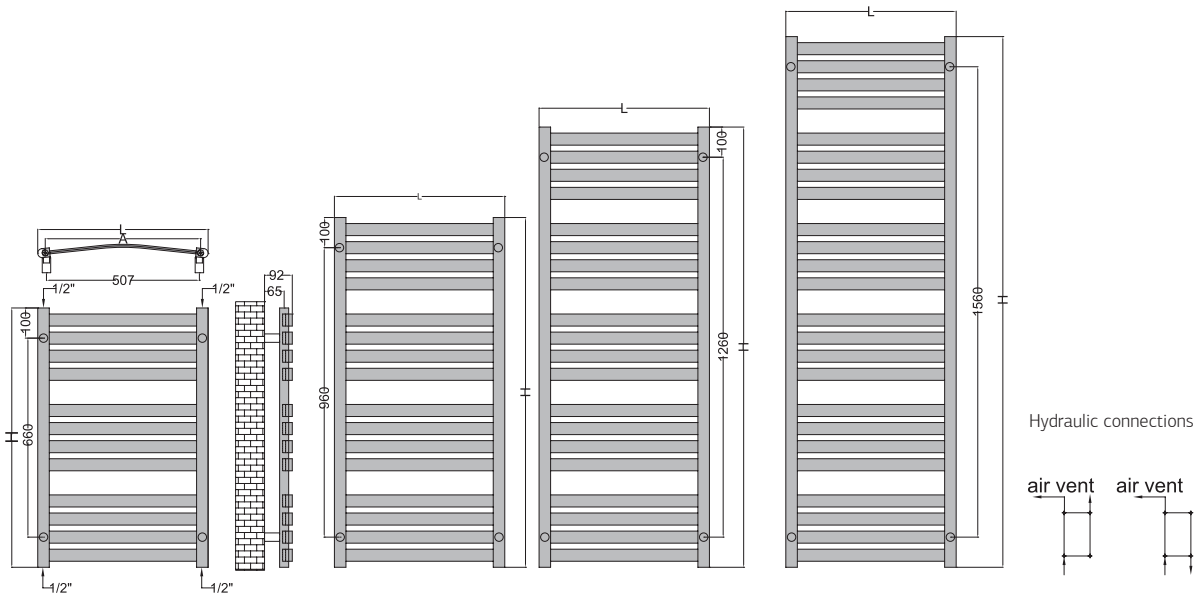



Break Q



BREAK Q este un radiator elegant și funcțional, care dispune de spații generoase pentru depozitarea și încălzirea prosoapelor. Cu un design modern, BREAK Q este disponibil în culorile RAL și de asemenea, în culori speciale, cum ar fi culorile texturate (negru, gri, bej sau alb)


BREAK Q is both stylish and functional with ample room for towels. Contemporary designed, BREAK Q is available in RAL colours and also in special colours such as textured black, white, beige or silver grey.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K06 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)				
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$	Electrical
mm	mm	mm	pcs	kg	l	ral	ral	ral	ral	
1200	500	459	23	13.8	5.8	318	450	607	759	600
1200	600	559	23	15.8	6.4	367	518	699	874	600
1560	500	459	29	17.6	7.4	404	571	772	965	900
1560	600	559	29	20.1	8.2	465	657	888	1110	900

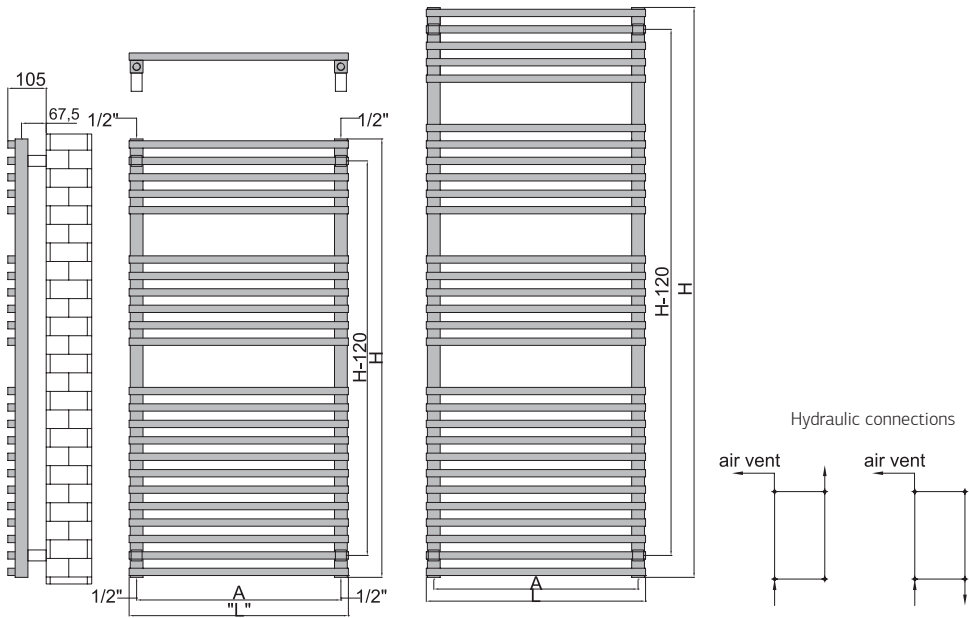



Premier XL




Realizat din oțel inoxidabil, PREMIER XL ofera garanția unui produs de calitate superioară. Este unul dintre produsele cele mai apreciate și vândute datorită caracteristicilor tehnice, puterii termice ridicate și eleganței formei sale. Gama de lățimi mici permite încadrea sa în spații înguste, putand asigura confortul termic dorit.

PREMIER XL provides you the highest quality towel rails around. Your Stainless Steel Towel Radiator will last and last, and keep on warming your room and towels for years to come. The small width range allow them to fit into small spaces while providing the warmth you need.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K12 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	stainless steel	stainless steel	stainless steel	stainless steel
800	450	412	16	5.7	3.2	121	171	231	289
800	500	462	16	6.1	3.5	132	187	253	316
800	600	562	16	6.9	3.9	155	219	296	370
1200	450	412	24	8.4	4.9	181	256	346	433
1200	500	462	24	9.0	5.2	198	280	379	473
1200	600	562	24	10.3	5.9	232	328	443	554
1800	450	412	37	12.7	7.4	277	391	529	661
1800	500	462	37	13.7	7.9	303	428	578	723
1800	600	562	37	15.6	9.0	355	501	678	847

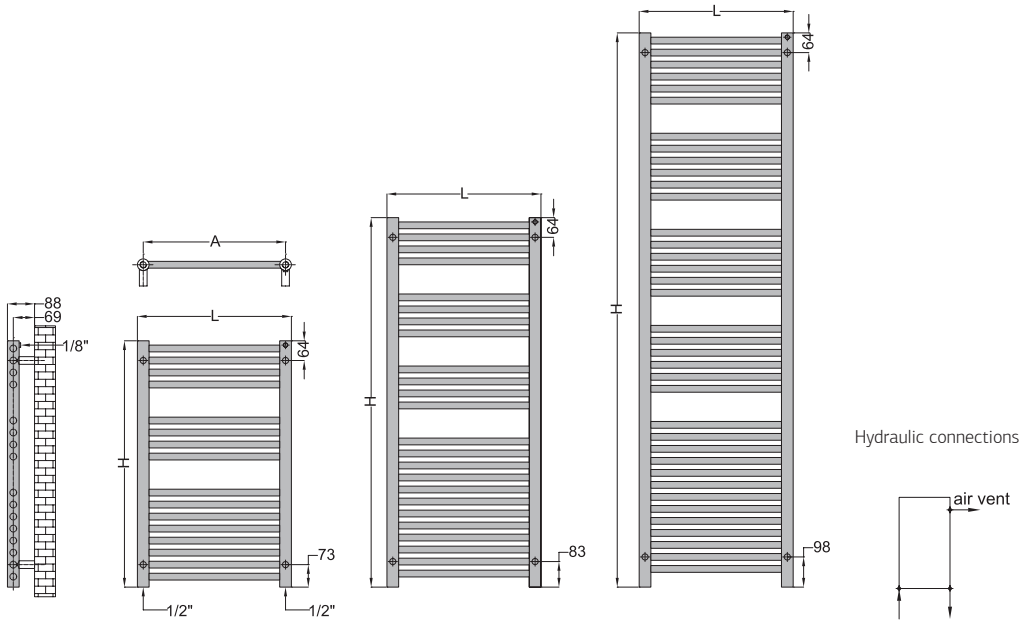



Premier XL Round




Cu beneficii enorme față de alte materiale, cum ar fi rezistența sporită la coroziune, PREMIER XL ROUND este făcut din elemente rotunzi din oțel inoxidabil, oferind garanții impresionante. În încăperi umede, cum ar fi baia sau bucătăria, PREMIER XL ROUND este soluția perfectă.

With huge benefits over other materials, such as being more resistant to corrosion, PREMIER XL ROUND is made from curved round Stainless Steel tubes, boasting impressive guarantees. In wet environments such as bathroom and kitchen, PREMIER XL ROUND is the perfect solution.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K12 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
mm	mm	mm	pcs	kg	l	stainless steel	stainless steel	stainless steel	stainless steel
800	450	412	16	5.7	3.2	121	171	231	289
800	500	462	16	6.1	3.5	132	187	253	316
800	600	562	16	6.9	3.9	155	219	296	370
1200	450	412	24	8.4	4.9	181	256	346	433
1200	500	462	24	9.0	5.2	198	280	379	473
1200	600	562	24	10.3	5.9	232	328	443	554
1800	450	412	37	12.7	7.4	277	391	529	661
1800	500	462	37	13.7	7.9	303	428	578	723
1800	600	562	37	15.6	9.0	355	501	678	847

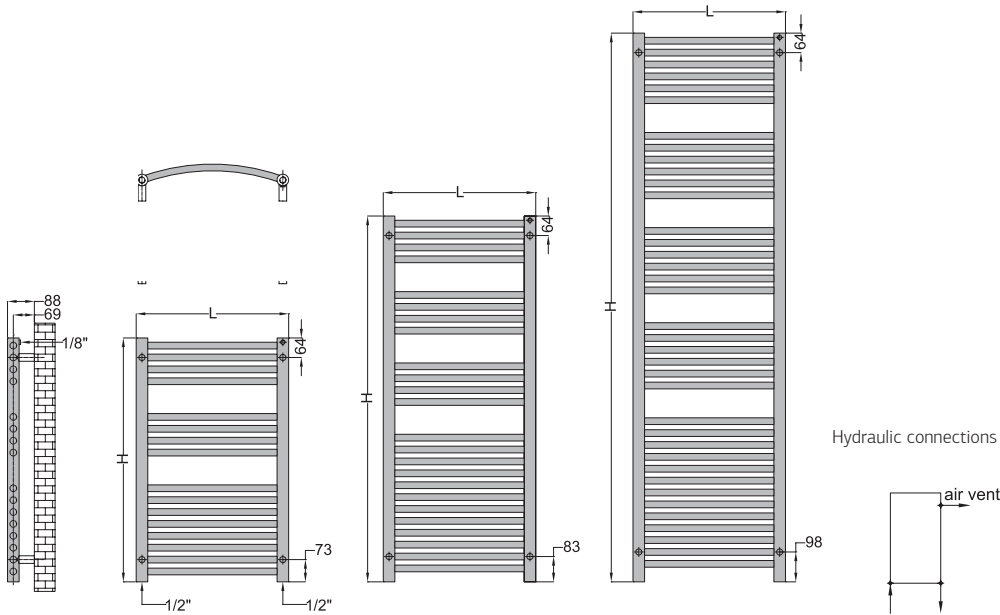



River




Un radiator port-prosop contemporan, RIVER completează orice baie sau bucătărie. Disponibil în toate finisajele (cromat, vopsit, inox), RIVER adaugă stil și eleganță oricărui interior.

Contemporary-style towel rail, RIVER complements any bathroom or kitchen alike. It is conveniently available in all finishes adding value to any design scheme.




Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K03 or K12 see pag 143

Height (H)	Length (L)	Centres (A)	No loops	Weight	Volume	OUTPUT (watt)											
						$\Delta t=30^{\circ}\text{C}$			$\Delta t=40^{\circ}\text{C}$			$\Delta t=50^{\circ}\text{C}$			$\Delta t=60^{\circ}\text{C}$		
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel
1000	500	72	9	4.8	2.7	137	105	101	193	148	143	261	201	193	326	251	241
1450	650	72	13	7.5	4.2	231	178	171	326	251	242	441	339	327	551	424	408

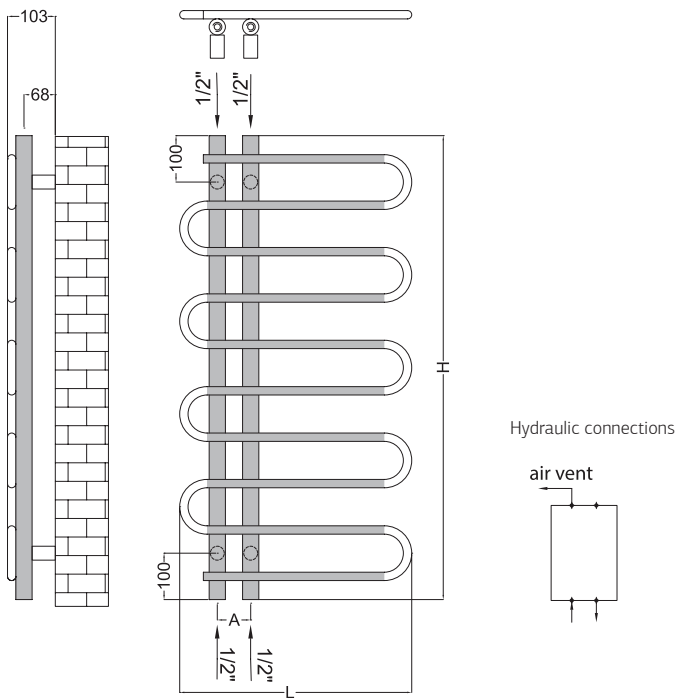



Scala

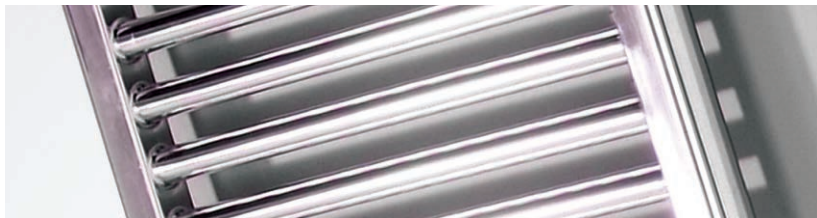

SCALA este un radiator emblematic, practic și util, extrem de eficient în încălzirea camerei și a prosoapelor. Disponibil în orice culoare și cromat.


SCALA is a good looking radiator which won't steal the show, just will keep you and your towels warm all day. Available in any colour and chrome.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K04 or K11 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)								
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome	
800	450	400	18	6.0	3.6	179	138	253	195	342	263	426	328	300
800	500	450	18	6.5	3.8	200	154	282	217	381	293	475	365	300
800	600	550	18	9.4	5.2	231	177	326	251	440	339	548	421	500
1200	450	400	26	8.7	5.2	261	201	369	284	499	384	620	477	600
1200	500	450	26	9.4	5.6	286	220	404	311	546	420	679	522	600
1200	600	550	26	10.7	6.4	340	262	480	370	649	499	808	621	600
1500	450	400	34	11.1	6.7	344	265	486	374	656	505	817	628	600
1500	500	450	34	12.0	7.2	376	289	531	409	718	552	893	687	900
1500	600	550	34	13.8	8.3	441	339	622	479	841	647	1047	805	900
1800	450	400	39	12.9	7.8	398	306	562	433	760	585	946	727	900
1800	500	450	39	13.9	8.4	406	312	573	441	775	596	964	742	900
1800	600	550	39	15.9	9.6	509	392	719	553	972	748	1209	930	1200

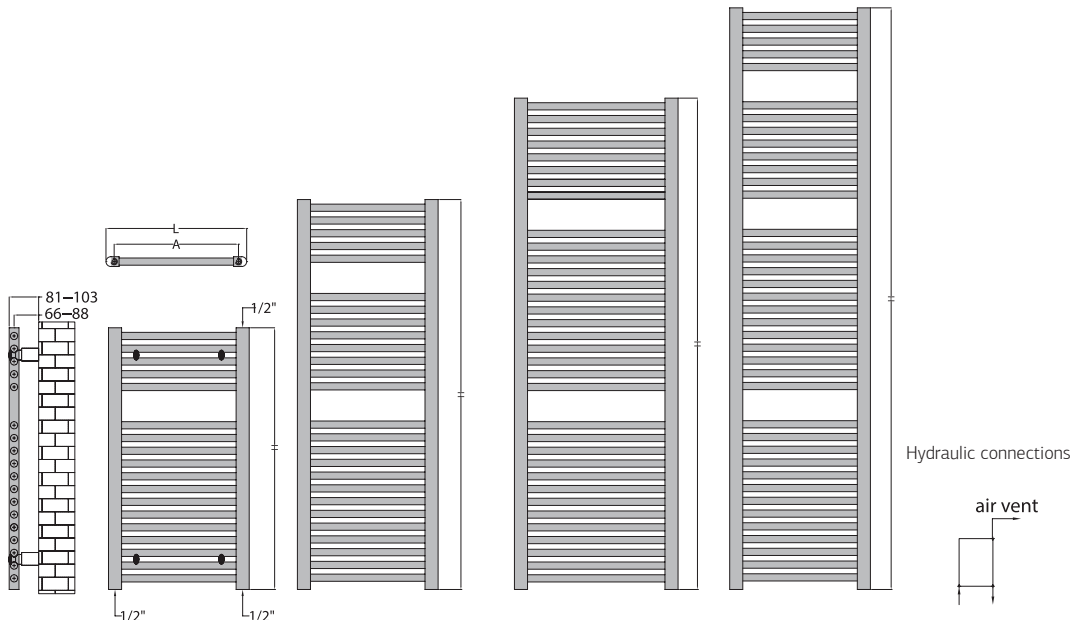



Scala Round



SCALA ROUND este un radiator port-prosop elegant, disponibil în toate culorile și crom. SCALA ROUND combină aspectul estetic cu utilitatea, beneficiind datorită elementelor săi curbați de un spațiu de depozitare și încălzire prosoape eficient.


With sleek curves, SCALA ROUND is a elegant towel rail radiator, avilable in all colours and chrome. Gently curving tubes work together to combine aesthetic appeal with efficient drying space.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K01 or K14 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)									
						Δt=30°C		Δt=40°C		Δt=50°C		Δt=60°C		Electrical	
mm	mm	mm	pcs	kg	l	ral	chrome	ral	chrome	ral	chrome	ral	chrome		
800	450	400	18	6.0	3.6	179	138	253	195	342	263	426	328	300	
800	500	450	18	6.5	3.8	200	154	282	217	381	293	475	365	300	
800	600	550	18	9.4	5.2	231	177	326	251	440	339	548	421	500	
1200	450	400	26	8.7	5.2	261	201	369	284	499	384	620	477	600	
1200	500	450	26	9.4	5.6	286	220	404	311	546	420	679	522	600	
1200	600	550	26	10.7	6.4	340	262	480	370	649	499	808	621	600	
1500	450	400	34	11.1	6.7	344	265	486	374	656	505	817	628	600	
1500	500	450	34	12.0	7.2	376	289	531	409	718	552	893	687	900	
1500	600	550	34	13.8	8.3	441	339	622	479	841	647	1047	805	900	
1800	450	400	39	12.9	7.8	398	306	562	433	760	585	946	727	900	
1800	500	450	39	13.9	8.4	406	312	573	441	775	596	964	742	900	
1800	600	550	39	15.9	9.6	509	392	719	553	972	748	1209	930	1200	

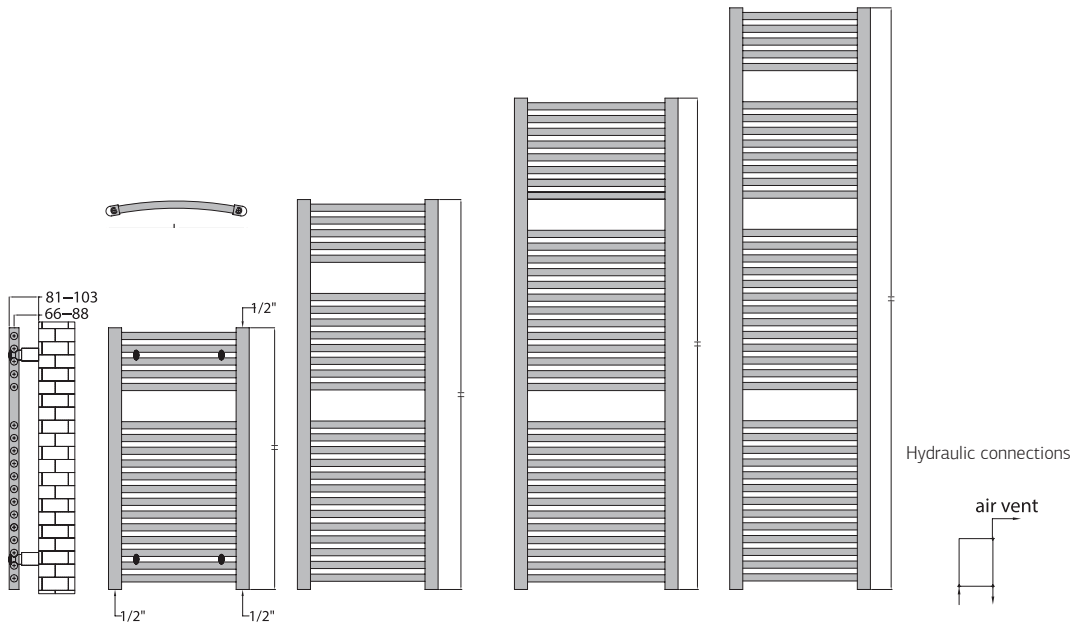



Space



Unul dintre produsele noastre de top, acest port-prosop se va încadra perfect în orice cameră. Fabricat din oțel de cea mai înaltă calitate, SPACE este potrivit pentru baie sau bucătărie și este disponibil în toate culorile RAL, cromat și inox.


One of our top-sellers, this towel rail will set the room alight. Made from the highest-quality steel, SPACE is available in all colours, in stainless steel and can be plated with chrome, and is suitable for any bathroom or kitchen.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K04 or K11 see pag 143



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	Electrical
800	450	400	16	5.6	3.3	169	130	125	238	183	177	322	248	239	403	310	298	300
800	500	450	16	6.0	3.6	184	141	136	260	200	192	351	270	260	439	338	325	300
800	600	550	16	6.8	4.1	214	165	159	303	233	224	409	315	303	511	393	379	500
1200	450	400	24	8.3	5.0	252	194	187	356	274	264	481	370	356	602	463	446	600
1200	500	450	24	8.9	5.4	275	212	204	388	299	288	525	404	389	656	505	486	600
1200	600	550	24	10.2	6.1	321	247	237	453	348	335	612	471	453	765	588	566	600
1500	450	400	30	10.4	6.2	316	243	234	446	343	330	603	464	447	754	580	558	600
1500	500	450	30	11.1	6.7	344	265	255	486	374	360	657	506	487	821	632	608	600
1500	600	550	30	12.7	7.7	401	309	297	567	436	420	766	589	567	957	736	709	900
1800	450	400	37	12.5	7.6	384	296	285	543	417	402	733	564	543	917	705	679	900
1800	500	450	37	13.5	8.2	419	323	311	592	456	439	800	616	593	1000	769	741	900
1800	600	550	37	15.4	9.3	490	377	363	691	532	512	934	719	692	1168	898	865	900

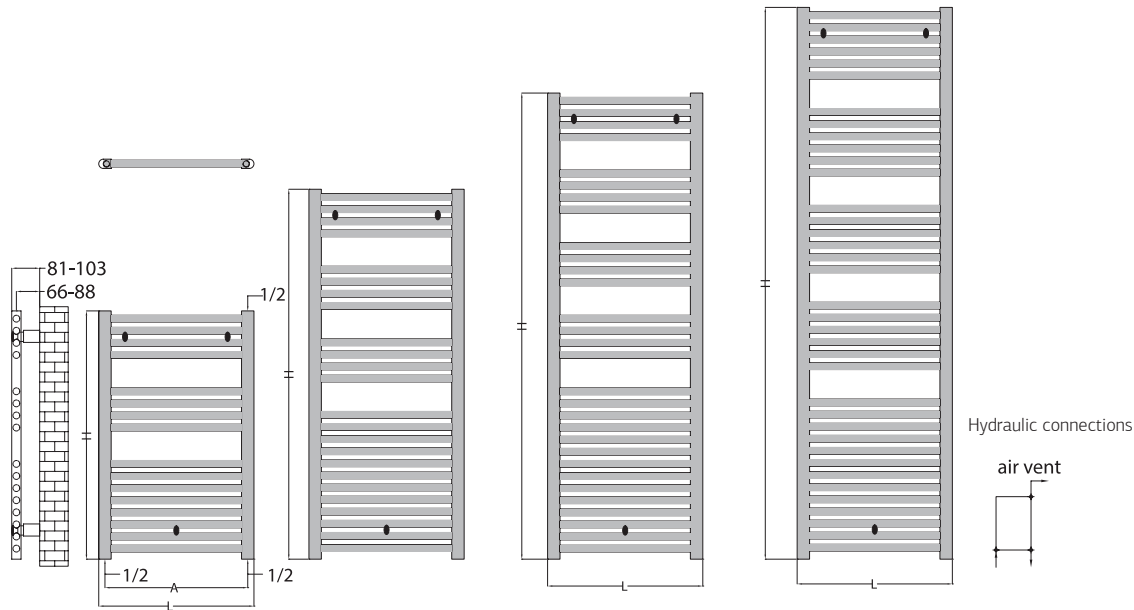



Space Round



SPACE ROUND conferă oricărei încăperi eleganță și utilitate prin forma curbată a elementelor. Stil accesibil, armonios și eficient, SPACE ROUND este un radiator clasic atât în forma cât și în funcționare.


With its subtle curve, SPACE ROUND gives greater wall clearance, allowing extra room for larger bath towels.

SPACE ROUND has discreet curve of the tubes providing for any bathroom or kitchen an elegant and understated appearance.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K01 or K14 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	Electrical
800	450	400	16	5.6	3.3	169	130	125	238	183	177	322	248	239	403	310	298	300
800	500	450	16	6.0	3.6	184	141	136	260	200	192	351	270	260	439	338	325	300
800	600	550	16	6.8	4.1	214	165	159	303	233	224	409	315	303	511	393	379	500
1200	450	400	24	8.3	5.0	252	194	187	356	274	264	481	370	356	602	463	446	600
1200	500	450	24	8.9	5.4	275	212	204	388	299	288	525	404	389	656	505	486	600
1200	600	550	24	10.2	6.1	321	247	237	453	348	335	612	471	453	765	588	566	600
1500	450	400	30	10.4	6.2	316	243	234	446	343	330	603	464	447	754	580	558	600
1500	500	450	30	11.1	6.7	344	265	255	486	374	360	657	506	487	821	632	608	600
1500	600	550	30	12.7	7.7	401	309	297	567	436	420	766	589	567	957	736	709	900
1800	450	400	37	12.5	7.6	384	296	285	543	417	402	733	564	543	917	705	679	900
1800	500	450	37	13.5	8.2	419	323	311	592	456	439	800	616	593	1000	769	741	900
1800	600	550	37	15.4	9.3	490	377	363	691	532	512	934	719	692	1168	898	865	900

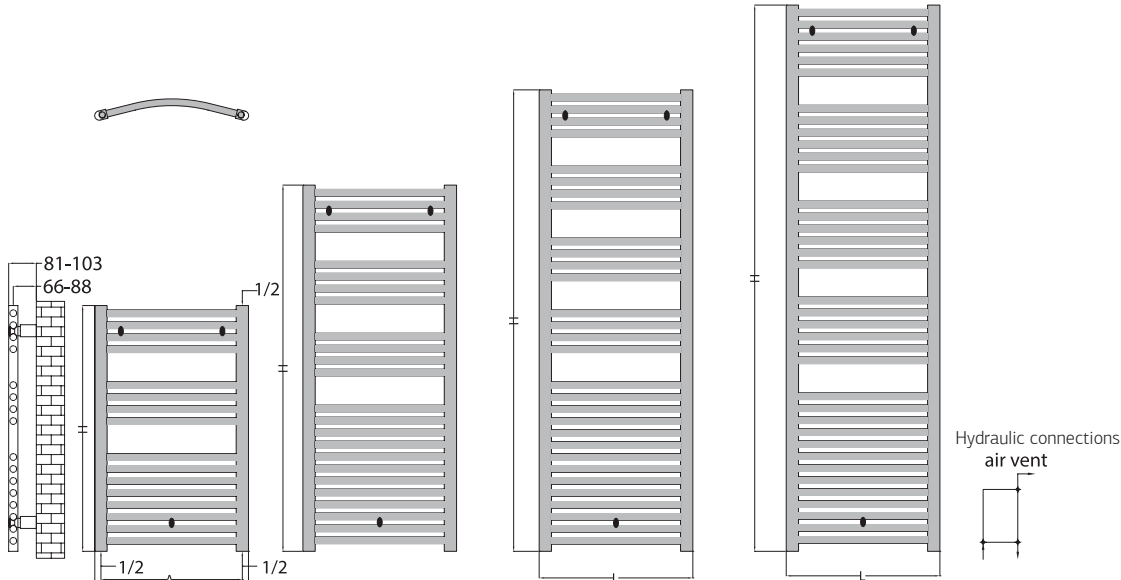




Looks simple but SUNNY has been carefully designed for maximum heating performance and capacity. It is a standard flat towel rail design, made from high quality steel, available in all finishes: chrome, painted in RAL colours and also in stainless steel.



Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			Electrical
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	
800	500	465	22	6.0	3.2	196	151	146	277	213	206	375	288	278	469	361	347	500
800	600	565	22	7.0	3.4	231	177	171	326	251	241	440	339	326	550	423	408	500
1200	500	465	33	9.0	4.8	294	226	218	415	319	307	561	431	415	701	539	519	600
1200	600	565	33	10.4	5.5	345	266	256	487	375	361	659	507	488	823	633	610	600
1800	500	465	51	13.8	7.4	450	346	333	635	489	471	859	661	636	1073	826	795	600
1800	600	565	51	16.0	8.4	529	407	392	747	575	554	1010	777	748	1262	971	935	900

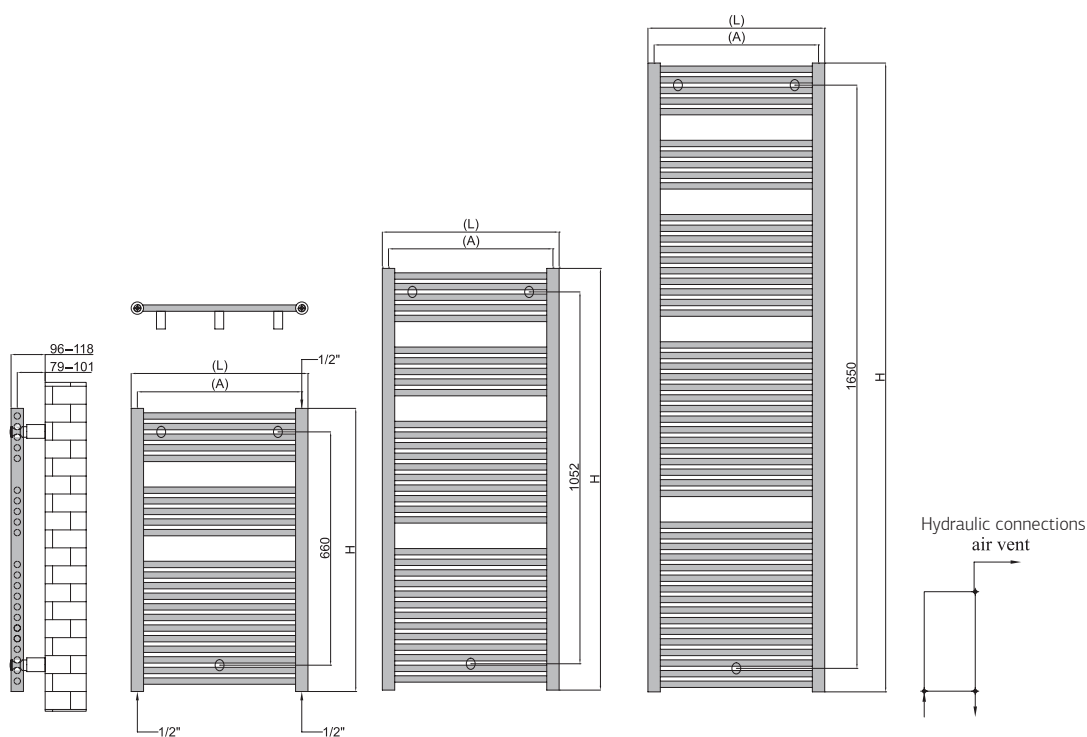



Sunny Round




SUNNY ROUND este un radiator port-prosoap simplu, elegant și extrem de eficient. Prin forma curbată a elementelor săi, SUNNY ROUND oferă spațiu suplimentar în partea din spate pentru depozitarea și încălzirea prosoapelor.

SUNNY ROUND is affordable style accomplished with simplicity. With curved rails bowing outwards, SUNNY ROUND offers extra space at the rear for towels to dry off and warm up.



Max. working pressure 7 bar | Max. working temperature 120 °C | Mounting kit included: K01 or K14 see pag 143

Height (H)	Length (L)	Centres (A)	No el	Weight	Volume	OUTPUT (watt)												
						Δt=30°C			Δt=40°C			Δt=50°C			Δt=60°C			
mm	mm	mm	pcs	kg	l	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	ral	chrome	stainless steel	Electrical
800	500	465	22	6.0	3.2	196	151	146	277	213	206	375	288	278	469	361	347	500
800	600	565	22	7.0	3.4	231	177	171	326	251	241	440	339	326	550	423	408	500
1200	500	465	33	9.0	4.8	294	226	218	415	319	307	561	431	415	701	539	519	600
1200	600	565	33	10.4	5.5	345	266	256	487	375	361	659	507	488	823	633	610	600
1800	500	465	51	13.8	7.4	450	346	333	635	489	471	859	661	636	1073	826	795	600
1800	600	565	51	16.0	8.4	529	407	392	747	575	554	1010	777	748	1262	971	935	900

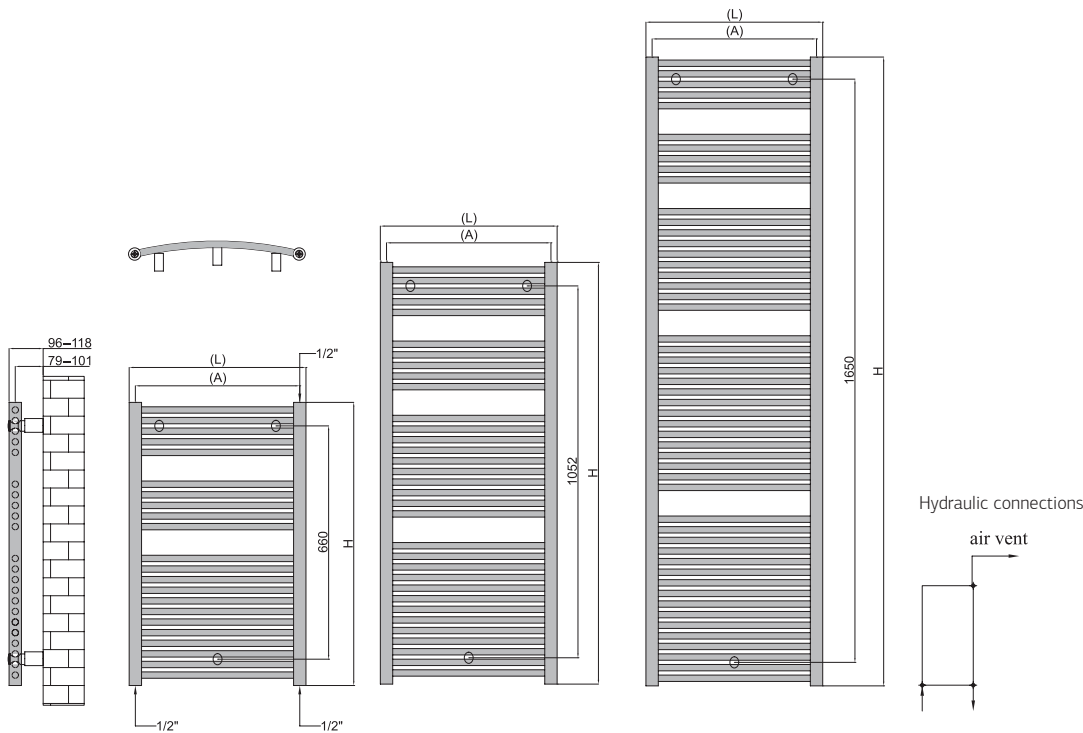



RC Convector




Cu un design simplu, convectorii RC conferă o putere termică ridicată. Adaptabili oricărui spațiu - comercial, industrial, rezidențial- convectorii RC sunt realizați din elementși de oțel de înaltă calitate. Proiectați pentru a oferi confort termic în locații în care siguranța și igiena sunt primordiale, convectorii RC se recomanda pentru spitale, case de îngrijire, centre de zi, camere de joacă și creșe. Cu colțuri rotunjite, convectorii RC sunt disponibili vopsiti în orice culoare din gama RAL.

With a clean design, our RC convectors provide a very high heat output. Suitable for most environments - commercial, industrial and domestic installations, RC convectors are constructed from high grade steel tubes. Designed to provide comfort heating in applications where safety and hygiene are paramount, RC convectors are especially suitable for hospitals, care homes, day centres, playrooms, surgeries and nurseries. With their rounded corners, RC convectors are available in all our RAL colours.

Max. working pressure 6 bar | Max. working temperature 120°C | Mounting kit included: K18 see pag 143

TYPE	Height (H)	Length (L)	Centres (A)	Weight	Volume	OUTPUT (watt)				electrical
						Δt=30°C	Δt=40°C	Δt=50°C	Δt=60°C	
	mm	mm	mm	kg	l	ral	ral	ral	ral	
RC21	70	1000		5.09	1.25	133	187	253	316	
		1200		6.16	1.46	161	227	307	384	
		1500		7.76	1.79	203	287	388	484	
		2000		10.44	2.32	274	386	522	652	
	140	1000	90	10.3	2.5	260	367	496	621	600
		1200	90	12.5	2.9	316	446	603	754	600
		1500	90	15.8	3.6	400	565	763	954	900
		2000	90	21.3	4.6	540	762	1030	1287	1200
	210	1000	160	15.6	3.7	388	547	740	925	900
		1200	160	18.9	4.4	471	665	899	1124	900
		1500	160	23.9	5.4	597	843	1139	1423	1200
		2000	160	32.2	7.0	806	1138	1538	1922	1500
	280	1000	230	20.8	5.0	515	727	983	1229	1200
		1200	230	25.3	5.9	626	885	1195	1494	1200
		1500	230	32.0	7.1	793	1121	1514	1893	1500
		2000	230	43.1	9.3	1072	1514	2046	2557	1500
RC32	70	1000		8.2	1.7	212	300	405	506	
		1200		9.9	2.1	259	365	494	617	
		1500		12.6	2.6	329	464	628	784	
		2000		17.0	3.4	446	629	850	1063	
	140	1000	90	16.7	3.5	427	602	814	1018	
		1200	90	20.4	4.1	521	736	995	1244	
		1500	90	25.9	5.1	664	937	1267	1583	
		2000	90	35.0	6.7	901	1272	1719	2149	
	210	1000	160	25.3	5.2	641	905	1223	1529	
		1200	160	30.8	6.2	784	1107	1496	1870	
		1500	160	39.1	7.7	998	1410	1905	2382	
		2000	160	53.0	10.1	1356	1915	2587	3234	
	280	1000	230	33.8	7.0	856	1208	1633	2041	
		1200	230	41.3	8.3	1047	1478	1997	2497	
		1500	230	56.1	10.8	1429	2018	2727	3408	
		2000	230	71.0	13.4	1811	2557	3456	4320	

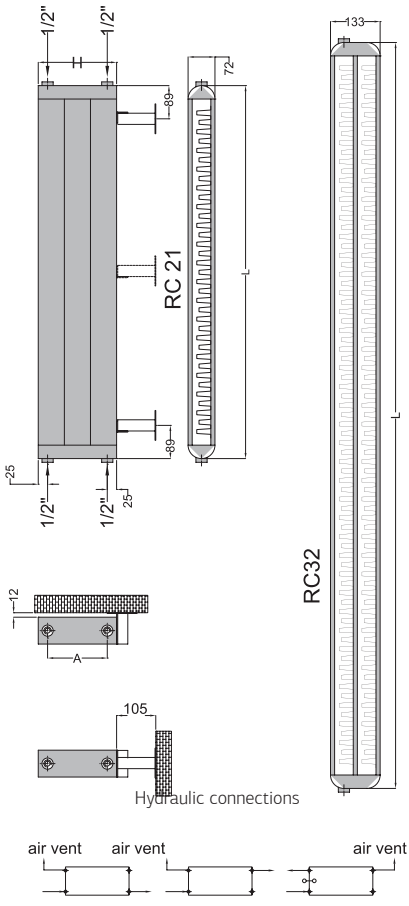



Wall Convector RCP




Combinând un aspect elegant cu un randament ridicat, WALL CONVECTOR RCP este perfect atât pentru acasă cât și pentru orice ambient. Cu o funcționare silențioasă și un design elegant, îngust, WALL CONVECTOR RCP este proiectat să dureze, performanța sa este garantată. Disponibil în finisaj vopsit alb, acest convector panou este ușor de utilizat și se va potrivi în orice interior.

Combining elegant good looks with high efficiency, the WALL CONVECTOR RCR is perfect for home or workspace. With silent operation and a stylish, slim design, the WALL CONVECTOR RCP is engineered to last, its performance is guaranteed. Available in clean white finish, this panel heater is easy-to-use and will fit into any interior.



Max. working pressure 7 bar | Max. working temperature 120°C

90°C / 70°C / 20°C (Δt=60°C)				
Height (H)		Speed	300	600
Width (mm)			85	85
Length (L)	600	0	89	136
		1	373	756
		2	423	886
		3	439	948
	1000	0	143	220
		1	602	1220
		2	682	1429
		3	708	1529
	1400	0	260	379
		1	1095	2103
		2	1239	2465
		3	1287	2637

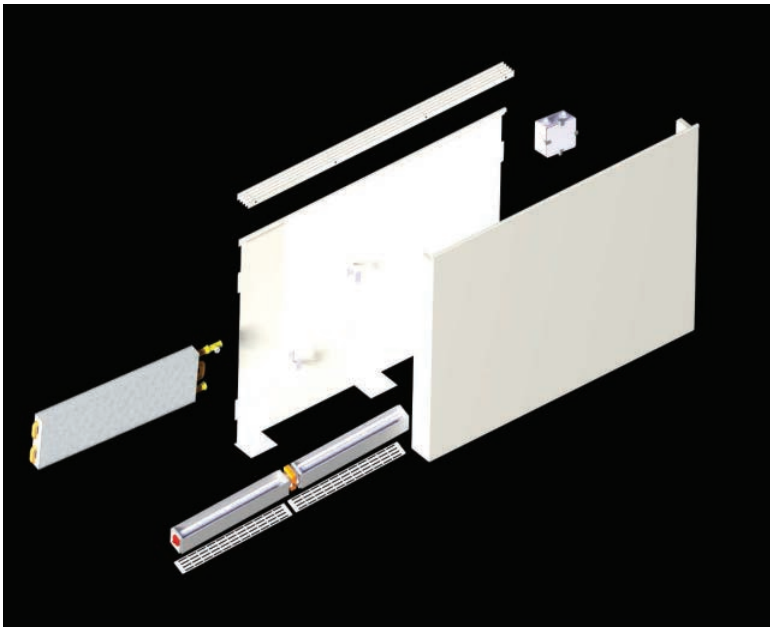



King




KING este un convector discret însă extrem de eficient, cu un randament termic foarte bun. Disponibil în mai multe dimensiuni și culori, KING este un convector ideal atât pentru spații rezidențiale cât și comerciale.

Wall mounted, KING is a discreet convector with a compact design with high heat output. Available in multiple sizes and colours options, KING is an ideal convector for any domestic or commercial applications.



Max. working pressure 6 bar | Max. working temperature 120 °C | Mounting kit included: K08 see pag 143

TYPE	Height (H)	Length (L)	Centres (A)	Weight	Volume	BTU/H			
						$\Delta t=30^{\circ}\text{C}$	$\Delta t=40^{\circ}\text{C}$	$\Delta t=50^{\circ}\text{C}$	$\Delta t=60^{\circ}\text{C}$
K 21	mm	mm	mm	kg	l	ral	ral	ral	ral
	280	1000	230	19.0	5.5	513	725	980	1225
	280	1500	230	28.1	7.6	773	1092	1475	1844
	420	1000	370	28.5	8.2	771	1088	1471	1838
K 22	420	1500	370	42.2	11.4	1161	1640	2217	2771
	280	1000	230	20.8	6.3	618	872	1179	1473
	280	1500	230	30.8	8.5	935	1321	1785	2231
	420	1000	370	31.3	9.5	926	1308	1767	2209
K 32	420	1500	370	46.3	12.7	1404	1982	2679	3348
	280	1000	230	30.3	9.8	874	1235	1669	2086
	280	1500	230	44.8	13.0	1323	1868	2525	3156
	420	1000	370	45.4	14.7	1310	1849	2499	3124
K 33	420	1500	370	67.3	19.5	1984	2802	3786	4733
	280	1000	230	33.4	9.8	1082	1529	2066	2582
	280	1500	230	49.7	13.0	1647	2325	3142	3928
	420	1000	370	50.2	14.7	1622	2290	3095	3868
	420	1500	370	74.8	19.5	2469	3487	4712	5890

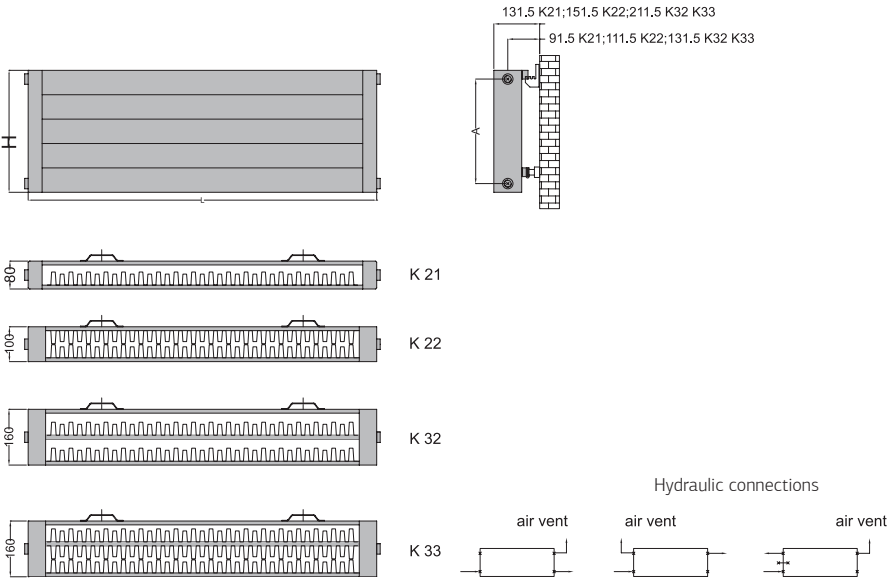



King Vent Convector



KING VENT este un convector de perete, o alternativă eficientă a radiatoarelor convenționale și a celor panou, distribuind căldura în camera cu ajutorul unui ventilator, obținându-se astfel un transfer de căldură mai mare.

Convectatorul KING VENT se conectează la sistemul de încălzire centrală în același mod ca un radiator și are cerințele minime de întreținere, distribuind rapid caldura în cameră în timp ce ocupă mult mai puțin spațiu de perete decât un radiator echivalent ca putere. Potrivit oricarui ambient, KING VENT este o soluție perfectă pentru zonele de recepție, camere de așteptare, birouri, școli, biblioteci, birouri, spitale, centre de agrement, magazine.


KING VENT is a wall mounted fan convector, an efficient alternative to conventional radiators as well as to panel heating, distributing the heat into the room by means of a fan, thus achieving a high heat transfer.

KING VENT convector connects to your central heating system in the same way as a radiator and with minimal maintenance requirements it rapidly distribute heat throughout a room whilst occupying much less wall space than a radiator of equivalent output. Suitable for most environments, KING VENT is a perfect solution for reception areas, waiting rooms, offices, schools, libraries, churches, hospitals, leisure centres, shops.



Max. working pressure 6 bar | Max. working temperature 120°C | Mounting kit included: K08 see pag 143

Height (H) mm	Length (L) mm	Centres (A) mm	Weight kg	Volume l	BTU/H			
					$\Delta t=30^{\circ}\text{C}$ ral	$\Delta t=40^{\circ}\text{C}$ ral	$\Delta t=50^{\circ}\text{C}$ ral	$\Delta t=60^{\circ}\text{C}$ ral
280	1000	230	16.1	6.3	306	432	583	729
280	1300	230	20.5	7.6	392	554	748	936
280	1750	230	27.1	9.5	522	737	996	1245

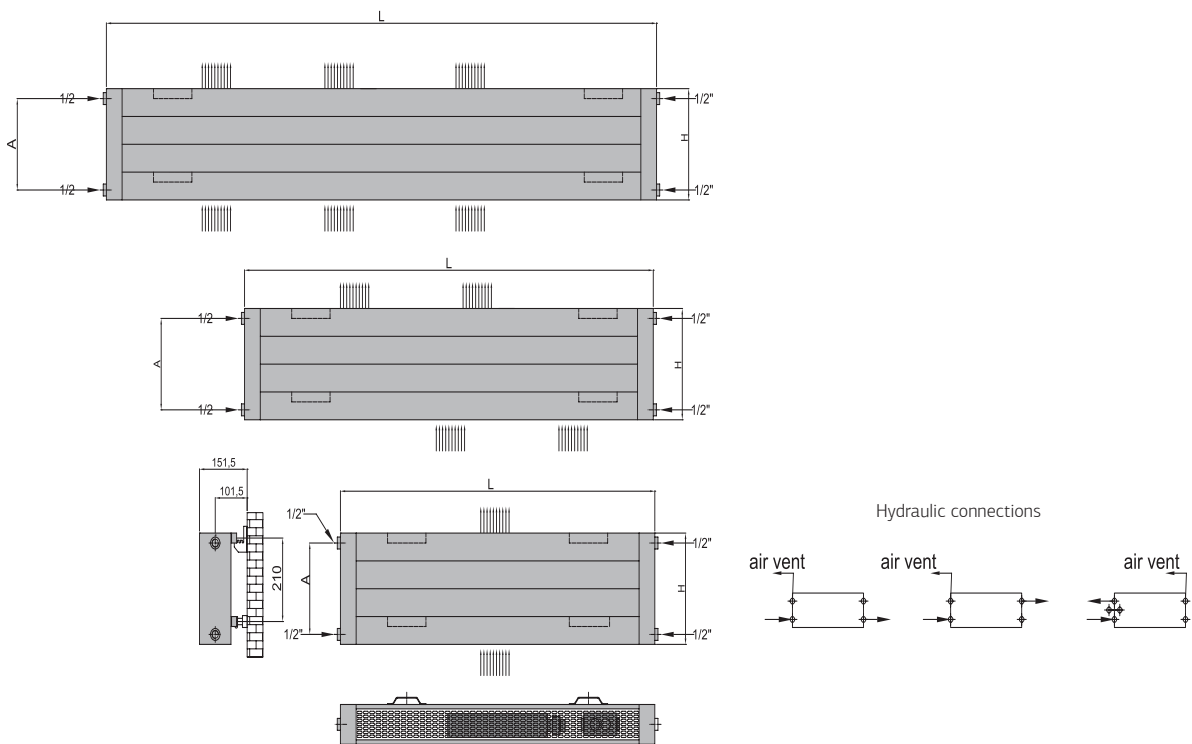



UNDERFloor Convector



Convectorii de pardoseală cu convecție naturală (RCN) sau forțată (RCF) sunt echipamente moderne destinate încălzirii aerului și dezaburirii suprafețelor vitrate mari în spațiile de birouri, centre comerciale, showroom-uri, grădini de iarna, apartamente etc

Convectorul este instalat în pardoseală, iar după construirea pardoselei numai grilele de lemn sau aluminiu într-o paletă largă de culori, vor rămâne vizibile. Este soluția ideală pentru crearea confortului termic primăvara sau toamnă și pentru amănajările interioare care nu permit instalarea corpurilor de încălzire clasică.

Our under floor convectors with natural (RCN) or forced (RCF) convection are modern equipment for heating air and demister large glass surfaces in offices, shopping centers, showrooms, winter gardens, apartments etc.

The convector body is installed in the floor, only wood or aluminum grilles will remain visible, available in a wide range of colours. It's the ideal solution for creating thermal comfort in spring or fall season and for interiors where classical heating is not an option.

UNDERFLOOR CONVECTORS RCF

75 °C / 65 °C / 20 °C (ΔT 50 °C)															
Height (H)	Speed	Sound dB(A)	90				110				130				
Width (mm)			190	260	330	410	190	260	330	410	190	260	330	410	
Length (L)	900	0	-	85	94	126	144	93	103	178	204	107	114	250	287
		1	22	356	395	698	800	445	494	714	819	556	617	730	838
		2	24	403	447	818	938	503	558	862	988	628	697	908	1042
		3	37	419	464	875	1003	584	647	1102	1264	813	901	1388	1593
	1300	0	-	148	164	222	255	163	181	313	359	179	199	441	505
		1	24	639	709	1201	1377	799	886	1229	1409	998	1106	1258	1442
		2	25	723	802	1408	1614	903	1001	1484	1702	1127	1250	1565	1794
		3	38	751	833	1507	1728	1046	1160	1898	2176	1458	1616	2390	2740
	1700	0	-	203	224	304	349	223	247	428	491	246	272	603	691
		1	24	881	977	1632	1871	1100	1220	1670	1915	1374	1524	1709	1959
		2	27	996	1105	1913	2193	1244	1380	2017	2312	1554	1723	2126	2437
		3	38	1034	1147	2048	2347	1441	1598	2578	2955	2007	2226	3246	3721
	2100	0	-	276	306	417	478	304	337	587	672	335	372	825	945
		1	25	1220	1354	2206	2526	1524	1691	2258	2586	1904	2112	2311	2647
		2	28	1380	1531	2587	2963	1723	1911	2726	3122	2152	2387	2873	3290
		3	39	1434	1590	2768	3170	1997	2214	3485	3992	2781	3084	4389	5027
	2500	0	-	351	390	533	610	387	429	749	858	426	473	1053	1206
		1	25	1571	1742	2785	3191	1962	2176	2850	3266	2450	2717	2918	3343
		2	29	1776	1970	3265	3741	2217	2460	3441	3942	2769	3072	3626	4154
		3	39	1845	2046	3494	4003	2569	2849	4399	5041	3577	3968	5540	6347
	2900	0	-	427	473	649	744	471	522	914	1048	519	575	1287	1476
		1	25	1929	2140	3367	3860	2410	2673	3447	3951	3010	3339	3528	4045
		2	30	2183	2420	3947	4525	2724	3021	4160	4769	3399	3769	4384	5026
		3	39	2265	2513	4224	4842	3155	3499	5319	6098	4394	4873	6698	7679
	3300	0	-	504	558	768	881	556	616	1081	1239	613	680	1521	1744
		1	25	2294	2545	3952	4531	2866	3180	4046	4638	3582	3973	4141	4748
		2	31	2595	2879	4634	5313	3240	3593	4883	5599	4044	4485	5145	5899
		3	40	2695	2989	4959	5685	3754	4163	6244	7159	5229	5799	7863	9015
	3700	0	-	581	644	888	1018	641	711	1250	1433	707	784	1758	2016
		1	26	2666	2958	4540	5207	3331	3694	4648	5329	4160	4615	4757	5455
		2	31	3016	3345	5324	6104	3765	4176	5609	6432	4700	5212	5911	6778
		3	40	3132	3474	5696	6531	4361	4837	7173	8225	6073	6735	9034	10359
	4100	0	-	660	731	1010	1158	727	806	1421	1628	801	888	1998	2290
		1	26	3043	3376	5130	5880	3801	4217	5251	6018	4748	5267	5375	6160
		2	31	3442	3818	6015	6894	4298	4767	6338	7264	5366	5952	6679	7654
		3	40	3575	3965	6435	7375	4978	5521	8104	9288	6932	7689	10207	11698
	4500	0	-	738	818	1132	1230	813	902	1593	1730	896	993	2240	2433
		1	26	3425	3799	5722	6216	4279	4746	5858	6363	5346	5929	5997	6514
		2	31	3874	4298	6709	7288	4836	5365	7069	7679	6037	6697	7449	8091
		40		4023	4462	7178	7797	5603	6215	9039	9721	7804	8656	11384	12120

UNDERFLOOR CONVECTORS RCF

		90 °C / 70 °C / 20 °C (ΔT 60 °C)													
Height (H)	Speed	Sound dB(A)	90				110				130				
Width (mm)			190	260	330	410	190	260	330	410	190	260	330	410	
Length (L)	900	0	-	107	119	160	183	118	131	225	259	130	144	318	365
		1	22	453	502	886	1016	565	627	907	1040	706	783	928	1064
		2	24	512	568	1038	1191	639	709	1094	1255	798	885	1153	1323
		3	37	532	590	1111	1274	741	821	1400	1605	1032	1144	1763	2023
	1300	0	-	188	209	282	323	207	230	397	455	228	253	560	642
		1	24	812	901	1526	1749	1014	1125	1561	1790	1267	1405	1598	1832
		2	25	918	1018	1788	2050	1147	1272	1885	2161	1432	1588	1987	2278
		3	38	954	1057	1914	2194	1329	1473	2410	2763	1851	2053	3035	3480
	1700	0	-	257	285	386	443	284	314	544	623	312	346	766	878
		1	24	1119	1241	2073	2376	1397	1550	2121	2431	1745	1935	2171	2488
		2	27	1265	1403	2430	2785	1580	1752	2561	2936	1973	2189	2700	3094
		3	38	1313	1457	2601	2981	1830	2029	3274	3753	2549	2827	4123	4726
	2100	0	-	350	388	530	607	386	428	745	854	425	472	1048	1201
		1	25	1550	1719	2801	3208	1936	2147	2867	3284	2418	2682	2935	3362
		2	28	1752	1944	3285	3762	2188	2427	3462	3965	2733	3031	3649	4179
		3	39	1821	2019	3515	4026	2536	2812	4426	5070	3532	3916	5574	6384
	2500	0	-	446	495	677	775	491	545	951	1090	541	601	1337	1532
		1	25	1995	2213	3537	4052	2491	2763	3620	4148	3111	3451	3706	4246
		2	29	2255	2502	4147	4751	2816	3124	4370	5007	3516	3901	4604	5276
		3	39	2343	2599	4437	5084	3262	3619	5587	6402	4543	5039	7036	8061
	2900	0	-	543	601	825	945	598	662	1161	1331	659	730	1635	1874
		1	25	2450	2717	4276	4902	3061	3394	4377	5018	3823	4240	4481	5137
		2	30	2772	3074	5013	5747	3459	3836	5283	6056	4317	4787	5568	6383
		3	39	2877	3191	5364	6149	4007	4444	6755	7744	5580	6189	8507	9752
	3300	0	-	640	709	976	1119	706	782	1373	1574	779	863	1932	2215
		1	25	2913	3232	5019	5755	3640	4038	5138	5891	4549	5046	5259	6030
		2	31	3296	3656	5886	6748	4114	4563	6201	7110	5136	5696	6534	7492
		3	40	3423	3796	6297	7220	4767	5287	7930	9092	6640	7364	9986	11449
	3700	0	-	738	818	1128	1293	814	902	1587	1820	898	995	2233	2561
		1	26	3386	3756	5766	6612	4230	4692	5903	6768	5284	5861	6042	6928
		2	31	3831	4249	6761	7753	4782	5303	7124	8169	5969	6619	7507	8608
		3	40	3978	4412	7233	8294	5539	6143	9110	10446	7712	8554	11473	13156
	4100	0	-	838	929	1283	1470	924	1024	1804	2068	1018	1128	2537	2908
		1	26	3865	4287	6515	7467	4828	5355	6669	7643	6030	6689	6826	7824
		2	31	4371	4849	7639	8755	5458	6054	8049	9226	6815	7559	8482	9721
		3	40	4540	5036	8172	9367	6322	7012	10189	10971	8803	9765	12704	12849
	4500	0	-	938	1039	1438	1562	1033	1145	2023	2197	1138	1262	2845	3090
		1	26	4350	4825	7267	7894	5435	6028	7439	8081	6789	7530	7616	8273
		2	31	4920	5458	8520	9255	6142	6813	8978	9752	7667	8505	9460	10276
		3	40	5109	5667	9115	9902	7116	7893	10906	11605	9911	10993	13048	13601

50 °C / 40 °C / 20 °C (ΔT 25 °C)															
Height (H)	Speed	Sound dB(A)	90				110				130				
Width (mm)			190	260	330	410	190	260	330	410	190	260	330	410	
Length (L)	900	0	-	34	38	51	58	37	42	71	82	41	46	101	115
		1	22	143	159	280	322	179	198	287	329	224	248	294	337
		2	24	162	180	329	377	202	224	346	397	252	280	365	419
		3	37	168	187	352	403	235	260	443	508	327	362	558	640
	1300	0	-	60	66	89	102	66	73	126	144	72	80	177	203
		1	24	257	285	483	554	321	356	494	566	401	445	506	580
		2	25	291	322	566	649	363	402	597	684	453	503	629	721
		3	38	302	335	606	694	420	466	763	874	586	650	961	1101
	1700	0	-	81	90	122	140	90	99	172	197	99	109	242	278
		1	24	354	393	656	752	442	490	671	769	552	612	687	787
		2	27	400	444	769	881	500	554	811	929	624	693	854	979
		3	38	416	461	823	943	579	642	1036	1188	807	895	1305	1495
	2100	0	-	111	123	168	192	122	135	236	270	135	149	332	380
		1	25	491	544	887	1015	613	680	907	1039	765	849	929	1064
		2	28	554	615	1040	1191	692	768	1096	1255	865	959	1155	1322
		3	39	576	639	1112	1274	802	890	1401	1604	1118	1239	1764	2020
	2500	0	-	141	157	214	245	155	173	301	345	171	190	423	485
		1	25	631	700	1119	1282	788	874	1146	1313	985	1092	1173	1344
		2	29	714	792	1312	1504	891	989	1383	1584	1113	1234	1457	1670
		3	39	741	822	1404	1609	1032	1145	1768	2026	1438	1595	2226	2551
	2900	0	-	172	190	261	299	189	210	367	421	208	231	517	593
		1	25	775	860	1353	1551	969	1074	1385	1588	1210	1342	1418	1626
		2	30	877	973	1586	1819	1095	1214	1672	1917	1366	1515	1762	2020
		3	39	910	1010	1698	1946	1268	1406	2138	2451	1766	1959	2692	3086
	3300	0	-	202	224	309	354	223	248	434	498	246	273	611	701
		1	25	922	1023	1588	1821	1152	1278	1626	1864	1439	1597	1664	1908
		2	31	1043	1157	1863	2135	1302	1444	1962	2250	1625	1803	2068	2371
		3	40	1083	1201	1993	2285	1509	1673	2509	2877	2101	2331	3160	3623
	3700	0	-	234	259	357	409	258	286	502	576	284	315	707	810
		1	26	1072	1189	1825	2093	1339	1485	1868	2142	1672	1855	1912	2192
		2	31	1212	1345	2140	2453	1513	1678	2254	2585	1889	2095	2375	2724
		3	40	1259	1396	2289	2625	1753	1944	2883	3306	2441	2707	3631	4163
	4100	0	-	265	294	406	465	292	324	571	654	322	357	803	920
		1	26	1223	1357	2062	2363	1528	1695	2110	2419	1908	2117	2160	2476
		2	31	1383	1534	2417	2771	1727	1916	2547	2920	2157	2392	2684	3076
		3	40	1437	1594	2586	2964	2001	2219	3257	3733	2786	3090	4102	4701
	4500	0	-	297	329	455	494	327	362	640	695	360	399	900	978
		1	26	1377	1527	2300	2498	1720	1908	2354	2557	2148	2383	2410	2618
		2	31	1557	1727	2696	2929	1944	2156	2841	3086	2426	2691	2994	3252
		3	40	1617	1793	2885	3134	2252	2498	3633	3907	3136	3479	4575	4871


UNDERFLOOR CONVECTORS RCN

75 °C / 65 °C / 20 °C (ΔT 50 °C)															
Height (H)	90					110					130				
Width (mm)	140	170	260	330	410	140	170	260	330	410	140	170	260	330	410
Length (L)	900	129	139	187	244	280	164	177	239	305	350	180	195	262	330
	1300	193	208	279	385	441	245	264	356	481	551	270	291	392	518
	1700	254	274	370	525	602	324	350	472	656	752	357	385	518	707
	2100	319	344	464	668	765	406	438	591	834	955	447	482	650	899
	2500	390	420	566	815	933	496	535	721	1016	1165	546	588	793	1095
	2900	459	495	668	960	1101	584	631	850	1198	1373	643	693	935	1292
	3300	529	571	769	1107	1269	675	727	980	1383	1585	741	800	1078	1492
	3700	599	646	871	1254	1438	763	823	1110	1565	1795	840	906	1220	1688
	4100	669	722	973	1401	1605	853	920	1240	1748	2003	937	1011	1363	1886
	4500	739	797	1075	1547	1774	942	1015	1369	1931	2213	1036	1118	1505	2082


90 °C / 70 °C / 20 °C (ΔT 60 °C)															
Height (H)	90					110					130				
Width (mm)	140	170	260	330	410	140	170	260	330	410	140	170	260	330	410
Length (L)	900	163	176	237	310	355	208	225	303	388	445	229	247	332	419
	1300	245	264	355	489	560	311	335	452	610	700	343	369	498	657
	1700	323	348	470	667	765	411	444	599	833	955	453	489	658	898
	2100	406	437	589	848	972	515	556	751	1059	1213	567	612	826	1142
	2500	495	533	719	1035	1186	630	679	915	1291	1479	693	747	1007	1391
	2900	583	629	849	1220	1398	742	801	1080	1521	1744	817	881	1188	1641
	3300	672	725	977	1406	1612	857	924	1245	1756	2013	941	1016	1369	1895
	3700	761	821	1107	1592	1826	969	1045	1410	1988	2280	1067	1151	1550	2144
	4100	850	917	1236	1779	2039	1083	1168	1574	2220	2544	1190	1284	1731	2395
	4500	939	1013	1366	1965	2253	1196	1290	1739	2452	2811	1316	1419	1912	2644

50 °C / 40 °C / 20 °C (ΔT 25 °C)															
Height (H)	90					110					130				
Width (mm)	140	170	260	330	410	140	170	260	330	410	140	170	260	330	410
Length (L)	900	52	56	75	98	112	66	71	96	123	141	72	78	105	133
	1300	78	83	112	155	177	98	106	143	193	221	108	117	157	208
	1700	102	110	149	211	242	130	140	190	264	302	143	155	208	284
	2100	128	138	187	268	307	163	176	238	335	384	180	194	261	361
	2500	157	169	228	327	375	199	215	290	409	468	219	236	319	440
	2900	185	199	269	386	442	235	253	342	481	552	258	279	376	519
	3300	213	229	309	445	510	271	292	394	556	637	298	321	433	600
	3700	241	260	350	504	578	307	331	446	629	721	338	364	490	678
	4100	269	290	391	563	645	343	370	498	703	805	377	406	548	758
	4500	297	320	432	622	713	378	408	550	776	890	417	449	605	837

Upper view RCN

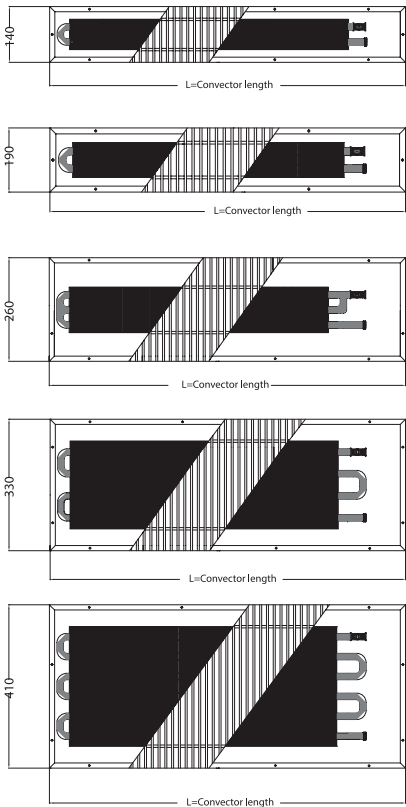

Upper view RCF

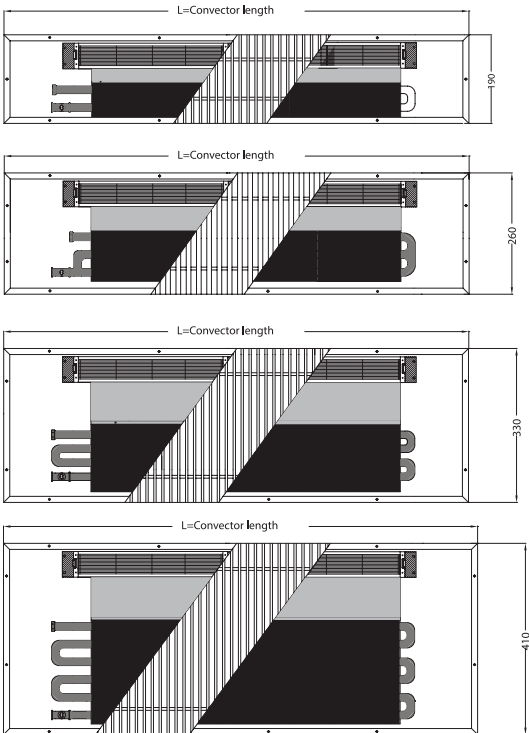



RCN z /RCF z


Curved UNDERFloor Convector

Convectorii nostri curbati de pardoseala pot copia diferite forme ale camerei: RCN a / RCF a (arc) si RCN z / RCF z(unghi). Cu un schimbător de căldură curbat și un cadru de aluminiu personalizat, RADOX poate produce convectori de pardoseala făcuți la comandă pentru orice stil arhitectural, cu o calitate excepțională și foarte eficiente energetic.

Our curved underfloor convector can copy different shapes of the room: RCN a / RCF a (arc) si RCN z / RCF z(angle). With a curved heat exchanger and a custom made aluminum frame, RADOX can produce customized floor convectors for any architectural style, with exceptional quality and very energy efficient.



RCN a/RCF a

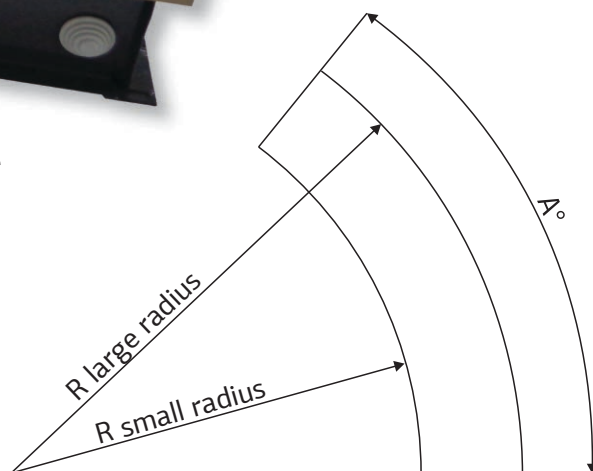

- R large radius
- R small radius
- A°

Technical Information





Electrical RADIATOR	pag.140
---------------------	---------

Mixed working RADIATOR	pag.141
------------------------	---------

Accessories:

Chrome cover for radiator pipes	pag.142
---------------------------------	---------

Mounting kit	pag.143
--------------	---------

Valves	pag.145
--------	---------

Pressure Test	pag.146
---------------	---------

Colour RAL chart	pag.147
------------------	---------

Conditions & Terms	pag.148
--------------------	---------

Radiatoare electrice

Foarte ușor de folosit, radiatoarele electrice reprezintă o bună alternativă pentru încălzirea centrală și din fericire o mare parte din radiatoarele noastre pot fi și electrice. Doar cu o legatura electrica si un elegant radiator RADOX, puteti avea un sistem complet de incalzire in bucatarie, in baie sau oricare alta camera.

Toate produsele noastre electrice pot fi furnizate cu lichid antiîngheț la interior și complet asamblate cu toate elementele necesare, rezistență, termostat, cablu și ștecher. Puterile sunt funcție de modelul radiatorului, de obicei de 300, 500, 600 și 900 watts, însă putem oferi și puteri mai mari.

Radiatoarele electrice RADOX sunt echipate cu termostat electronic digital sau analog, au clasa II de izolare, și au protecție IP 44. La cerere putem oferi radiatoare cu termostat infrarosu.

Electric Radiators

Electric Radiators are an excellent alternative to central heating and fortunately most of our radiators can be electric. Your home heating needs can be effectively provided for with a designer RADOX radiator and a simple electrical connection. Each electric radiator comes with a fitted element(s), cable, and upon request- an infrared thermostat. The outputs are according to the radiator size, usually 300, 500, 600 and 900 watts, but we can offer higher outputs.

All of our electric radiators possess Class II double isolation and IP 44 protection.

RADOX electric radiator is an efficient home-heating alternative and is another value product that we offer our clients.



Radiatoare mixte

Pentru a satisface nevoile și preferințele specifice ale clienților noștri din întreaga lume, RADOX oferă radiatoare care pot funcționa hidraulic, electric și mixt (hidraulic și electric).

Sistemul mixt de încălzire este o metodă flexibilă și eficientă de conectare la o centrală termică (sau altă sursă de căldură) în timpul iernii, în timp ce în anotimpurilor reci atunci când centrala termică este oprită, pentru încălzire se folosește electricitatea ca sursă de energie, asigurându-



se astfel o cameră caldă într-o zi rece de primăvară sau toamnă.

Radiatoarele noastre mixte sunt asamblate cu un element „T” care face posibilă funcționarea mixtă. În plus, fiecare radiator mixt este livrat cu console de prindere pe perete, aerisitor și un kit electric clasa II. Robineții și alte accesorii trebuie solicitate separat.



Mixed radiators

In order to address the diverse needs of our clients across the globe and their varying climates, RADOX offers radiators capable of utilizing hydronic, electric, and hybrid heating systems (hydronic and electric combination). The latter-mentioned hybrid-heating system essentially is a flexible and efficient method of connecting the heater to a boiler (or other heat source) in the winter while during cooler seasons when the boiler remains off, the heater



utilizes electricity as its energy source, thus ensuring a warm room on a cold spring or autumn day.

Our hybrid radiators are packed with a stopper for the water outlet and a valve for the water entry point. Additionally, each radiator comes with wall mounts, air vents and a Class II electrical kit. Valves and fittings need to be specified upon order.



Accesorii premium

Oferta RADOX nu cuprinde numai radiatoare, dar și accesorii care completează designul produsului livrat. Robineți, elemente de acoperire a țevelor de instalații, agățătoare sau suporturi de prosoape din inox, cromate sau vopsite sunt câteva din produsele care fac diferența prin calitate și design.

Accesoriile premium realizate de RADOX sunt rezultatul unei preocupări de dezvoltare constantă, în scopul de a aduce libertatea de a reinterpretă și personaliza fiecare radiator RADOX.

Premium accessories

An exquisite radiator demands an exquisite finishing touch. RADOX provides an extensive line of designer valves, pipe covers, robe hooks and chrome-plated or stainless steel towel bars.

These premium accessories are a result of years of consistent development affording RADOX the artistic privilege to attire each radiator on an individual basis, according to the client's design scheme.



Kit decorativ acoperire țevi

Acest element decorativ cromat este soluția ideală pentru acoperirea țevelor instalației termice. Un detaliu care completează designul și eleganța radiatorului RADOX.

Chrome cover for radiator pipes

Add a touch of style with this ideal pipe chrome cover just to give your pipes a decorative chrome finish.



Kit console de montaj

Toate radiatoarele RADOX ornamentale și port - prosop sunt furnizate cu kit complet de console de prindere în perete.

Gama noastră de console vă permite să instalați cu ușurință orice radiator RADOX desăvârșind interiorului camerei

dumneavoastră. Accesoriile și kiturile de montaj vin într-o varietate de finisaje pentru a completa radiatoarele RADOX cromate, inox sau vopsite în diferite culori RAL.

Mounting kit

All RADOX designer radiators and heated towel rails collection are supplied complete with brackets and wall fixings.

Our collection of radiator brackets allow you to install your RADOX radiator easily creating the right look to suit the

style of your room. Fittings and mounting kits come in a variety of finishes to complement RADOX's chrome, coloured or stainless steel towel rails and designer radiators.

K01



K02



K03



K04



K06



K07



K08



K11



K12



K13



K14



K15



K18



K22



K23



K24



K25



K26



K27



K28



K29



K09






Oferim dopuri și aerisitoare plate cu capace de protecție cromate sau vopsite alb pentru radiatoarele noastre ornamentale și, la cerere, pentru radiatoare port-prosoap.

We provide specifically designed blanking plugs and flat covers in chrome or white for our designer radiators and on request for the towel rails radiators.



Robineți /Valves

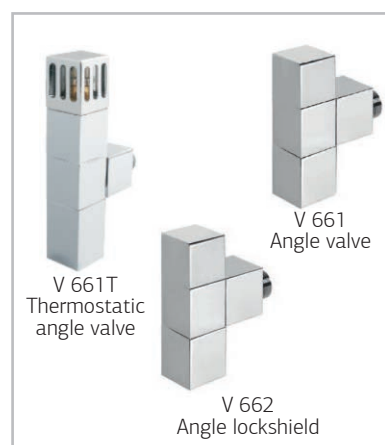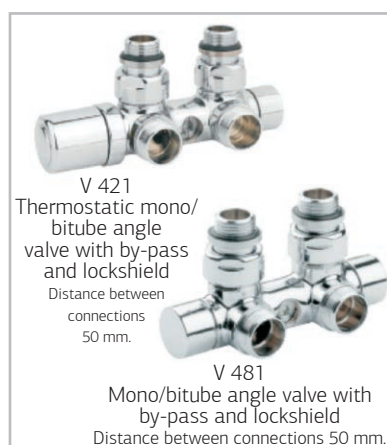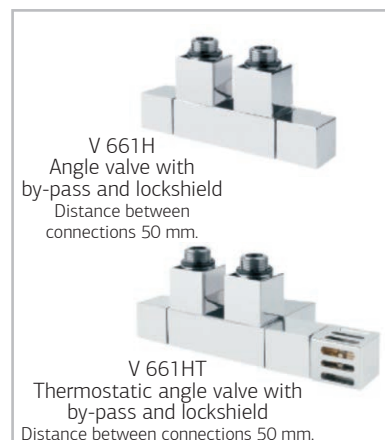

Presiunea de testare

Pressure test

Radiatoarele RADOX sunt controlate pe intreg procesul de productie, trecand prin 9 puncte de control. Avem un sistem de control al calitatii si mediului certificat ISO 9001 & ISO 14001 si putem controla si supraveghea toate etapele de productie, acordand aceeaasi atentie la detalii de la inceputul procesului pana la sfarsit. Produsele noastre au marca CE , garantand astfel ca nu va exista niciodata vreun compromis in ceea ce priveste standardul ridicat de calitate al radiatoarelor RADOX.

Dupa ce au fost sudate, radiatoarele sunt verificate amanuntit vizual si dimensional inainte sa fie testate la presiune. Imersate in solutii speciale de proba, ele sunt supuse la presiuni superioare cerintelor europene si internationale in domeniu.

We carry out comprehensive tests on ALL our radiators during production - each RADOX radiator pass 9 quality control points. We have a certified quality and environmental control system ISO 9001 & ISO 14001 - we control and oversee all stages of production which ensures that for every radiator we give the same stringent attention to detail from start to finish. Our products are CE marked, ensuring that there will never be any compromise in Radox Radiators' high standard of quality.

Once they have been welded, they pass thorough visual inspection before undergoing pressure and leakage tests. Submerged in special solutions, they are subjected to pressure way beyond the relevant European and international requirements.

Apollo; Dora 70	4 bari
Allure; Combi; Combi Glass; King, King Vent; Nova, Nova Flat. Nova Glass; Rc Convector	6 bari
Kazar; Serene	8 bari
Esse; Fan; Invisible 40; Invisible 50; Piglet; Vesta; Vesta Uno, Wave	10 bari
Aramis; Aztek; Break Q; Broc; Circle; Cora; Ellie; Ellie 3; Empire; Empire Inspire; Empire Multi; Filon; Fingers; Idea; Maze; Mega; Mega Burlani; Multicolona; Multicolona Square; Premier XI; Premier XI Round; Quebis; Quebis Round; River; Scala; Scala Round; Sera; Serpentine; Slim; Smart U; Space; Space Round; Sunny; Sunny Round; Upper; Upper Quadro; Vertica D; Vertica D Bi; Vertica D Mirror; Vulcan	13 bari
Underfloor Convector	13 bari
Wall Convector RCP	13 bari



Colour RAL chart

STANDARD



RAL 9010 white

SPECIAL COLOURS



RAL 1013



RAL 1015



RAL 1019



RAL 1021



RAL 1028



RAL 2004



RAL 3000



RAL 3003



RAL 3018



RAL 4005



RAL 4008



RAL 5015



RAL 5017



RAL 5018



RAL 6018



RAL 6024



RAL 8012



RAL 8017



RAL 9005



Black Pearl



RAL 9006



Antracit Grey
2002/0100



RAL 7015 Grey



RAL 7046
Light Grey



RAL 7047
Extra Light Grey

TEXTURED CHARD




RAL 9010
Textured White



RAL 1001
Textured Beige



RAL 9005M
Textured Black



Y370hhi
Soft textured
metallic Grey

ANTIQUE



BRONZE



BRASS PATINA



COPPER PATINA

Colorile prezentate sunt folosite doar pentru referinta. Alte culori din gama RAL sunt disponibile la cerere.
Colours shown are used for reference only. Other RAL colours available on request.

Condiții generale de vânzare

Datele cuprinse în catalog, pliante, broșuri sau alte materiale publicitare au caracter informativ. RADOX (FURNIZORUL) are dreptul de a modifica fără notificare procedurile tehnice în ceea ce privește construcția, forma, materialele produselor sale. Având în vedere procesul de tipărire și toleranțele de fabricație, culoarea radiatorului poate fi diferită de cea prezentată în broșura sau în schema de culori RAL. Recomandăm ca instalația termică să nu fie finalizată înainte de a primi noul radiator sau informațiile necesare despre produsul achiziționat.

PRODUSE SPECIALE ȘI FABRICATE LA COMANDA. RADOX propune și o gamă de soluții personalizate. Mai mult, personalul departamentului tehnic este tot timpul la dispoziția CLIENTULUI pentru a analiza, evalua, oferi soluții sau pentru orice alte cerințe speciale.

COMENZI. Radiatoarele sunt livrate în condițiile specificate în formularul de confirmare a comenzii. Modelele ce se află în stoc au un termen de livrare de 7-10 zile. Pentru produse care nu se află în stoc, termenul de livrare este de 5 - 6 săptămâni de la data confirmării comenzii de către client. Cu toate acestea, termenul de livrare este specificat în momentul confirmării comenzii. Nu este permisă modificarea comenzilor după ce procesul de producție a început. Modificarea comenzii presupune costuri suplimentare și creșterea timpului de livrare. Anularea sau modificarea unei comenzi se face în baza unui acord scris cu FURNIZORUL. Costurile ce deriva din anularea unei comenzi vor fi suportate de către CLIENT. În caz de forță majoră, FURNIZORUL poate modifica termenul de livrare stabilit anterior.

ORIGINEA PRODUSELOR. Produsele RADOX sunt livrate din fabrica noastră din București (România) – Bd. Timisoara, Nr. 80, sector 6, cu excepția cazurilor în care este specificată alta origine a produselor.

LIVRAREA. Produsele RADOX sunt livrate în condiții Ex-Works București.

RECLAMATII. Toate defectele de fabricație care apar în perioada de garanție trebuie raportate în maxim 7 zile de la descoperirea defectului. FURNIZORUL este obligat să remedieze/inlocuiască produsul în cazul unor defecte de fabricație, fără a fi necesară plata daunelor. RADOX nu accepta bunuri returnate fără o autorizare în prealabil, excluzând situațiile menționate anterior. Toate bunurile returnate fără autorizația noastră nu vor fi acceptate, și vor fi trimise înapoi clientului.

GARANTIA. Noi oferim următoarea garanție pentru problemele cauzate de defecte de fabricație: 10 ani în cazul pierderilor de apă pentru radiatoarele de oțel și 20 de ani pentru produsele din oțel inoxidabil; 5 ani garanție pentru alte probleme de fabricație. Garanția este valabilă în condițiile în care radiatoarele sunt folosite în mod corespunzător, într-un sistem de încălzire centrală cu apă caldă. Perioada de garanție începe cu data facturării produsului. Pentru a beneficia de garanție, produsele noastre trebuie instalate de către personal calificat în acord cu instrucțiunile și reglementările din domeniu. Garanția nu mai este valabilă în următoarele situații: dacă clientul nu furnizează date complete privind eticheta (poziționată pe spatele radiatorului) care evidențiază săptămâna și anul de producție, fotografii, documentație scrisă privind tipul defectului; instalare defectuoasă, folosirea neadecvată a produselor, în cazul în care produsele au înghețat sau au

suferit socuri, clientul a folosit substanțe sau produse necorespunzătoare pe suprafața exterioară sau în interiorul produselor RADOX; calitatea inferioară a apei a deteriorat produsul. Recomandările privind utilizarea radiatoarelor noastre sunt:

- înainte de a fi instalat, radiatorul trebuie depozitat în condiții bune și protejat de intemperii;
- radiatorul trebuie instalat conform normelor de instalare;
- apa folosită pentru a alimenta circuitul de încălzire trebuie să fie în limitele standard de 12° Fr;
- circuitul nu trebuie să conțină reziduuri metalice, calamina, grasimi sau gaz;
- nu lăsați radiatorul fără apă, chiar și pe timpul verii;
- nu folosiți apă de mare pentru a umple radiatorul;
- PH-ul apei trebuie să aibă o valoare cuprinsă între 6.5 și 8;
- nu folosiți și/sau instalați radiatorul în alt scop decât încălzirea spațiilor;
- dacă se folosește un inhibitor de coroziune, acesta trebuie să fie compatibil cu toate materialele pe care radiatorul le conține;
- modificarea radiatorului sau a suprafeței acestuia duce la pierderea garanției;
- garanția nu acoperă costurile instalării sau dezinstalării radiatorului; în perioade de reparații sau înlocuire a radiatorului nu ne asumăm responsabilitatea pentru daunele create CLIENTULUI.

LIMITARI ALE RESPONSABILITĂȚII. Nu ne asumăm responsabilități mai mari decât cele acoperite prin garanție. Clientul trebuie să ne informeze din timp cu privire la orice compensație materială ce ne este solicitată astfel încât să ne permită evaluarea situației și asumarea răspunderii pentru daunele create dacă este cazul. Clientul nu are dreptul de a modifica termenii și condițiile noastre. Condițiile generale fac subiectul legii române.



Conditions & terms

The information contained in catalogues, fliers and other marketing documents are always free of obligation for the SUPPLIER (RADOX). We reserve the right to modify the technical procedures concerning the individual construction, form, materials etc. Due to printing processes and manufacturing tolerances, the colour of finished radiators may vary slightly from those shown in the brochure and a standard RAL colour chart. We recommend that pipe work is not altered or adjusted until your new radiator or towel rail is delivered or you receive all needed documentation.

SPECIAL AND CUSTOM-MADE VERSIONS. With a view to satisfying the market needs, RADOX proposes a unique range of customized solutions which can be defined with the CLIENT. Furthermore, the technical department personnel is always at the CLIENT's disposal to analyse, evaluate and provide estimates for customized shapes, connectors or other specific needs of the CLIENT whenever feasible.

ORDERS. The radiators are delivered in compliance with SUPPLIER's order confirmation. Stock models have a delivery term of 7-10 days. If you require non stock products, these have a delivery term of 5-6 weeks. However, the delivery deadline is always indicated in the SUPPLIER's confirmation. Any modification of the orders are not granted if the production has already begun. Any change of order can involve further costs and a delay of the delivery. The cancellation or any change of an order is subject to a written agreement with the SUPPLIER. Any costs deriving from the cancellation will be charged to the CLIENT. Any case of force majeure (wars, natural calamities, lack of raw materials, modification of export or import terms and conditions, production

limitation, strikes, disorders, etc) release the SUPPLIER of any delivery term previously fixed.

THE ORIGIN OF DELIVERY. The SUPPLIER's products shall be delivered from our factory in Bucharest (Romania) - Bd. Timisoara No. 80, unless specified otherwise.

DISPATCH. Radox products are delivered EX-Works Bucharest.

CLAIMS. All functional defects which may occur within 10 years for the steel radiators and 20 years for the stainless steel ones from the invoice date must be reported after a maximum of 7 days from the discovery of such faults. All defects inherent in the nature of the job create an obligation for the SUPPLIER to simply replace the certain faulty products, without having to give compensation for any other potential damages. The company does not accept any return of goods unless authorised in advance, excluding the situation mentioned in point above. Any goods returned to us without our authorisation will not be accepted, thus obliging the CLIENT to take them back.

GUARANTEE. We offer a 10-year guarantee for our steel radiators and towel rails and 20 years for the stainless steel products against any leaks and 5 years for other defects. The guarantee commences from the date of the SUPPLIER's invoicing. To benefit from this guarantee, our products must have been installed by qualified professionals, in accordance with our instructions and regulation. The guarantee does not cover the CLIENT under the following circumstances: improper installation; abnormal utilisation of products; in case the products were frozen or suffered a shock; the CLIENT used inadequate substances or products either on the interior or exterior

of RADOX goods; the bad water quality caused damage. Our radiators are guaranteed with the following reserves:

- The radiator must be stored in good condition and protected from bad weather before being installed;
- Installation must be made according to the rules;
- The water used to feed the heating circuit must be within standard limits 12° Fr;
- The circuit must be free of any metal residues, calamine, grease and there must be no gas present;
- Do not leave the radiator without water, even in summer months;
- Do not use sea water to fill the radiator;
- The water PH must have a value between 6.5 and 8;
- Do not use the radiators and/or the installation system for any other domestic purpose but heating;
- If a corrosion inhibitor is used, this must be compatible with all the materials contained in the heating radiators;
- Transforming our radiator or modifying its surface treatment eliminate the CLIENT's guarantee rights;
- The charges for installing and uninstalling the products are not covered by the guarantee. We are not liable for any damages caused by depriving the CLIENT of the radiators during their repair or replacement period.

LIMITATIONS OF RESPONSIBILITY. In what concerns our responsibilities related to our products, we do not accept liabilities that are greater than the guarantee cover described previously. A client should inform us without delay of any concrete compensation which may be requested of us, such that we can measure our responsibility given the situation. The CLIENT does not have the right to change a terms of responsibility or guarantee that we have offered. The general conditions are subject to Romanian law.

Toate informațiile prezentate sunt orientative și RADOX își rezervă dreptul de a face modificări fără o notificare prealabilă.
All information presented is indicative and RADOX reserves the right to modify it without notice.

Thanks to:

3D Artist: Daniel RĂDULESCU (www.danielradulescu.ro)
Graphic designer: Vasile MOLDOVAN (www.kreatika.ro)
Printing house: SILKAT (www.silkatprint.ro)

CATALOGUE RADOX

RADOX

Bucharest, Romania
Blvd Timisoara 80
6 th district, 061334

www.radoxradiators.ro
export@radox.ro

www.radox.ro
vanzari@radox.ro

Tel.: 0040 21 4440742
Tel.: 0040 21 4440741
Fax: 0040 21 4440743